

# AR16148CHSSL



Sample image

**Order symbol:** AR16148CHSSL

**Product nbr:** 8561064

**Description:** PC Enclosure


**Remarks:** Hinged opaque cover w/S.S. Lockable latch

**EAN:** 6418074067180

**EI. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Hinged cover. Base with 10-32 brass inserts, latched cover with formed in place PUR gasket, stainless hinge pin. Quick release latches. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

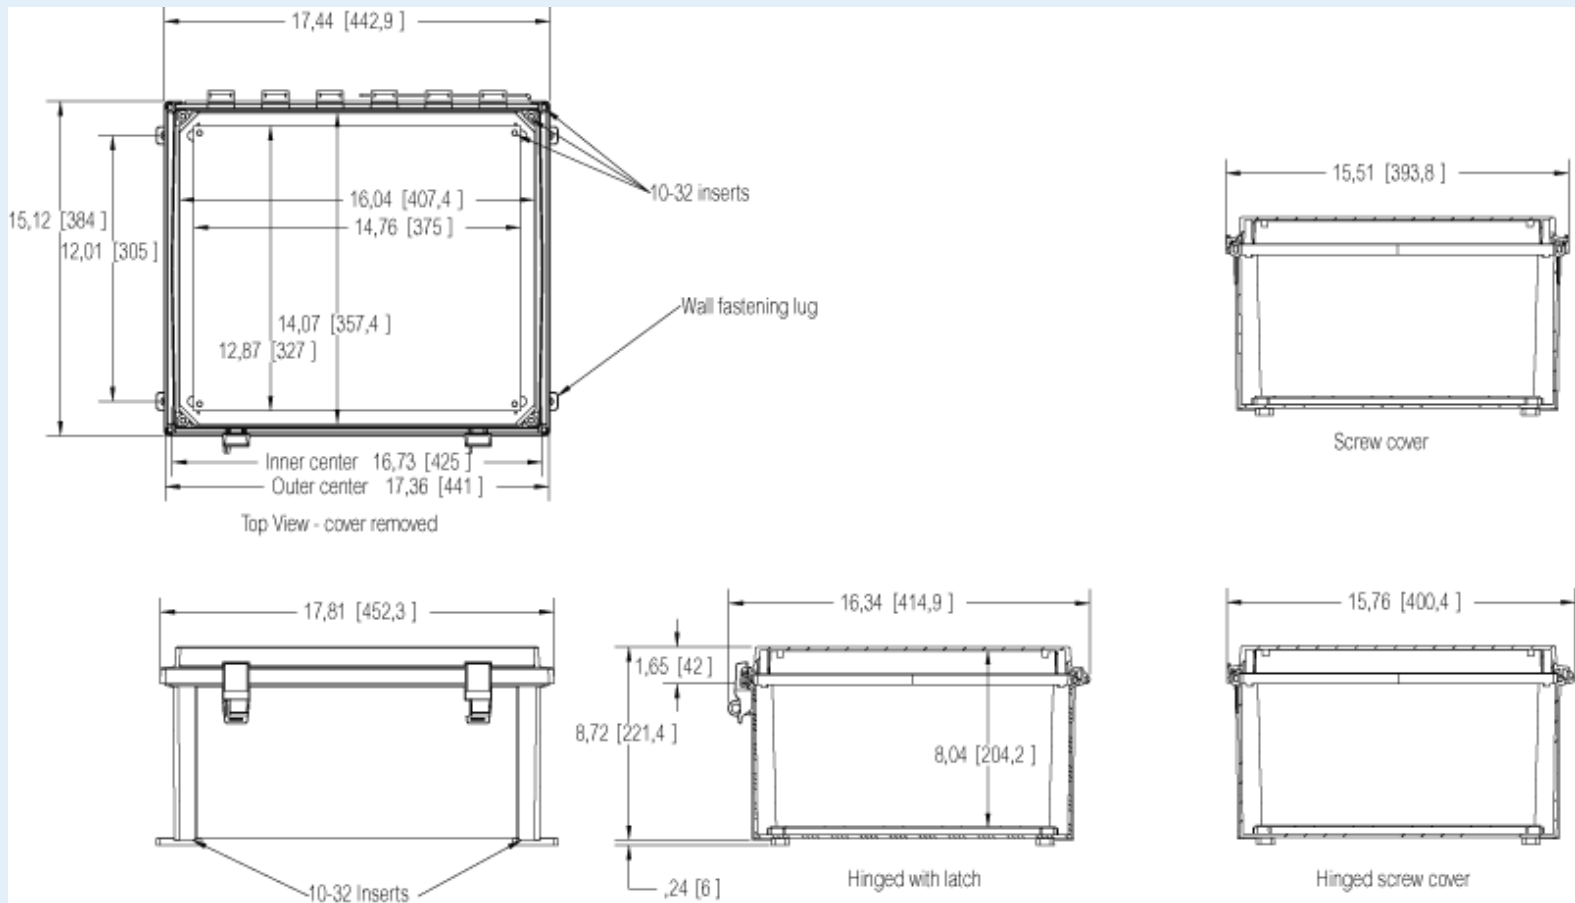

**Dimensions:**

mm:                      Height                      Width                      Depth

mm:                      406                      356                      203

**Accessories:**

ALBP1614                      Aluminum Back Panel

inch: 16 14 8

#### Materials:

Material: Polycarbonate  
Base colour: RAL 7035 -light grey  
Cover colour: RAL 7035 -light grey  
Gasket material: Polyurethane

#### Temperatures:

Temperature °C (short term):: -40 ... 140  
Temperature °C (continuous): -40 ... 80  
Temperature °F (short term): -40 ... 250  
Temperature °F (continuous): -40 ... 175

(375 x 327)

ASPHK16 Swing Panel Kit w/o Panel  
ADFP1614 Dead Front Panel w/ screws  
(362 x 415 x 0)  
APBP1614 PVC Back Panel  
(375 x 327)  
ABP1614 Painted Steel Back Panel  
(375 x 327)  
AMFL14 14" Mounting Flange Set  
ASPK1614 Swing Panel Kit incl. Panel

#### Rating:

Ingress protection (EN 60529): IP66; IP67;  
Impact Resistance (EN 62262): IK09;  
Electrical insulation: Not insulated  
Halogen free (DIN/VDE 0472, Part 815): 1  
UV resistance: UL 508  
Flammability Rating: UL 508  
Glow Wire Test (IEC 695-2-1) °C: 960 °C  
NEMA Class NEMA 4, 4X, 12 and 13

#### Certificates:

ARCA\_CertificateofCompliance