


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI91495	2019-09-02	Allen Pan	Modify Pin Out
C	CI92012	2019-11-18	Allen Pan	△C x5

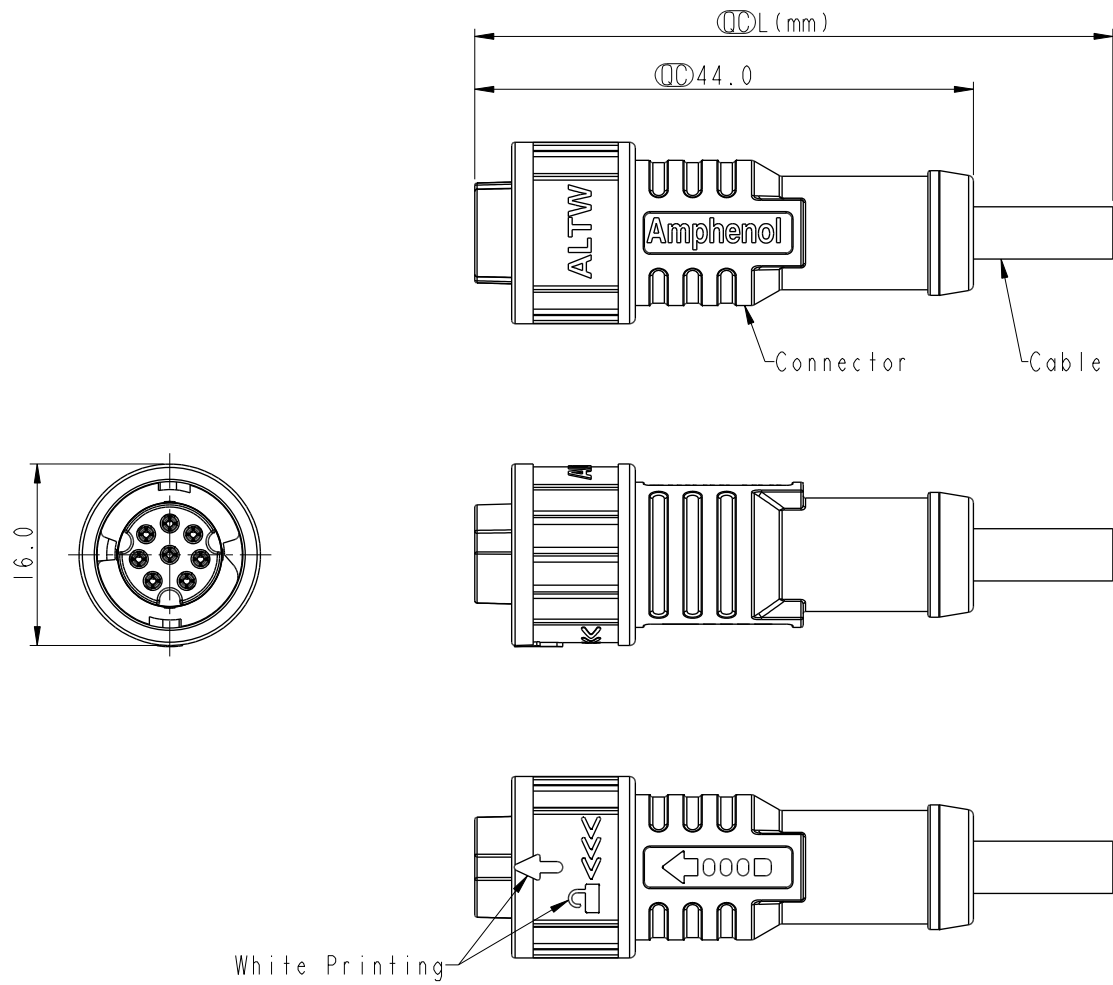

- △C Note:
- * ∅ Important Dimension To Check.
 - * Waterproof Rate: IP68(Mated)
 - * Flame Class: UL94V-0 (UV Resistance)
 - * Housing: Thermoplastic, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Outer Mold: Thermoplastic, Black.
 - * O-Ring: Rubber, Black
 - * Rated Current: 6~8Pin 2A(30V)
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm




UNIT:mm		
TOLERANCE		
±0.5mm		

TITLE X-Lok A-Size Molding F Conn F Pin			
SCALE 3:2	SIZE A4	SHEET 1 OF 2	
REV. C	WC-REV.	∅: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Gill Lai	DATE 2019-09-02
DWG NO △C AU-XXBFFM-QL8DXX	CHECKED BY Sam Ho	DATE 2019-09-02
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2019-09-02

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

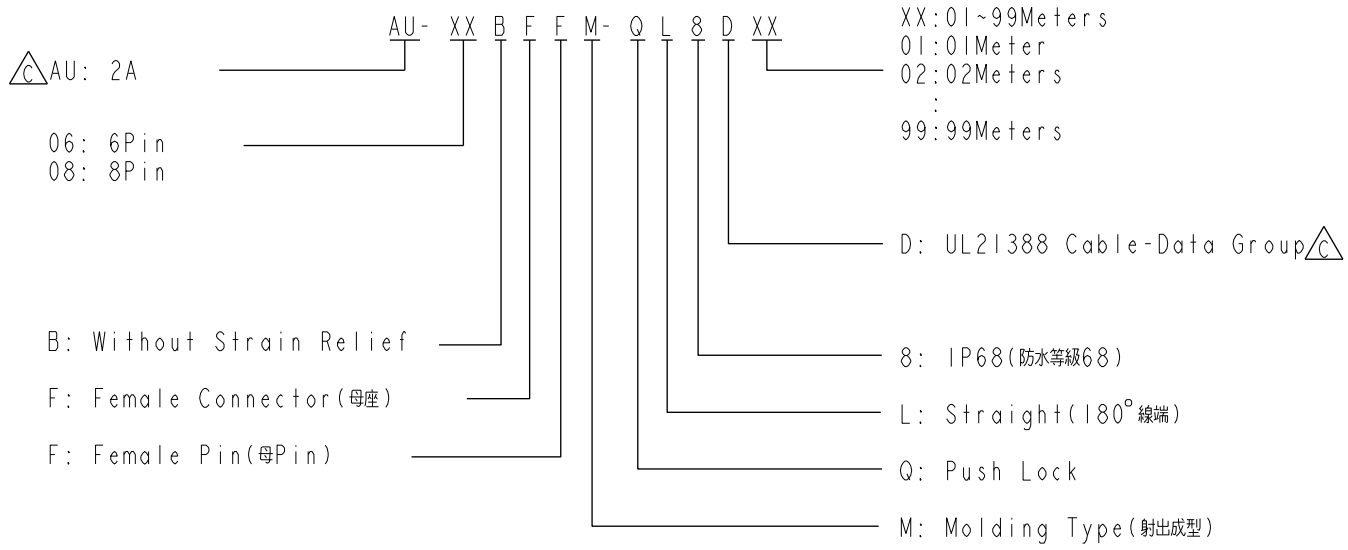


CABLE: $\triangle B$
 24AWG*6C+AL/MY
 PIN OUT:
 1.White
 2.Brown
 3.Green
 4.Yellow
 6.Pink
 7.Blue

CABLE: $\triangle B$
 24AWG*8C+AL/MY
 PIN OUT:
 1.White
 2.Brown
 3.Green
 4.Yellow
 5.Gray
 6.Pink
 7.Blue 8.Red

AU-06BFFM-QL8DXX

AU-08BFFM-QL8DXX

UNIT:mm



TOLERANCE

±0.5mm

TITLE X-Lok A-Size Molding F Conn F Pin		
SCALE 3:2	SIZE A4	SHEET 2 OF 2
REV. C	WC-REV.	QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Gill Lai	DATE 2019-09-02
DWG NO $\triangle C$ AU-XXBFFM-QL8DXX	CHECKED BY Sam Ho	DATE 2019-09-02
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2019-09-02