

# CAB PC 203018 G

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol:** CAB PC 203018 G

**Product nbr:** 8113331

UL Code: 8143331

UL Name: UL CAB PC 203018 G

**Description:** Opaque door


**Remarks:** Latch on the short side

**Including:** Cabinet base, door with PUR gasket, latches, screws for mounting plate/DIN-rail and corner plugs.

**EAN:** 64 18074020024

**El. number:**

- Finland: 3424103
- Denmark: 8212020401
- Sweden: 2539963

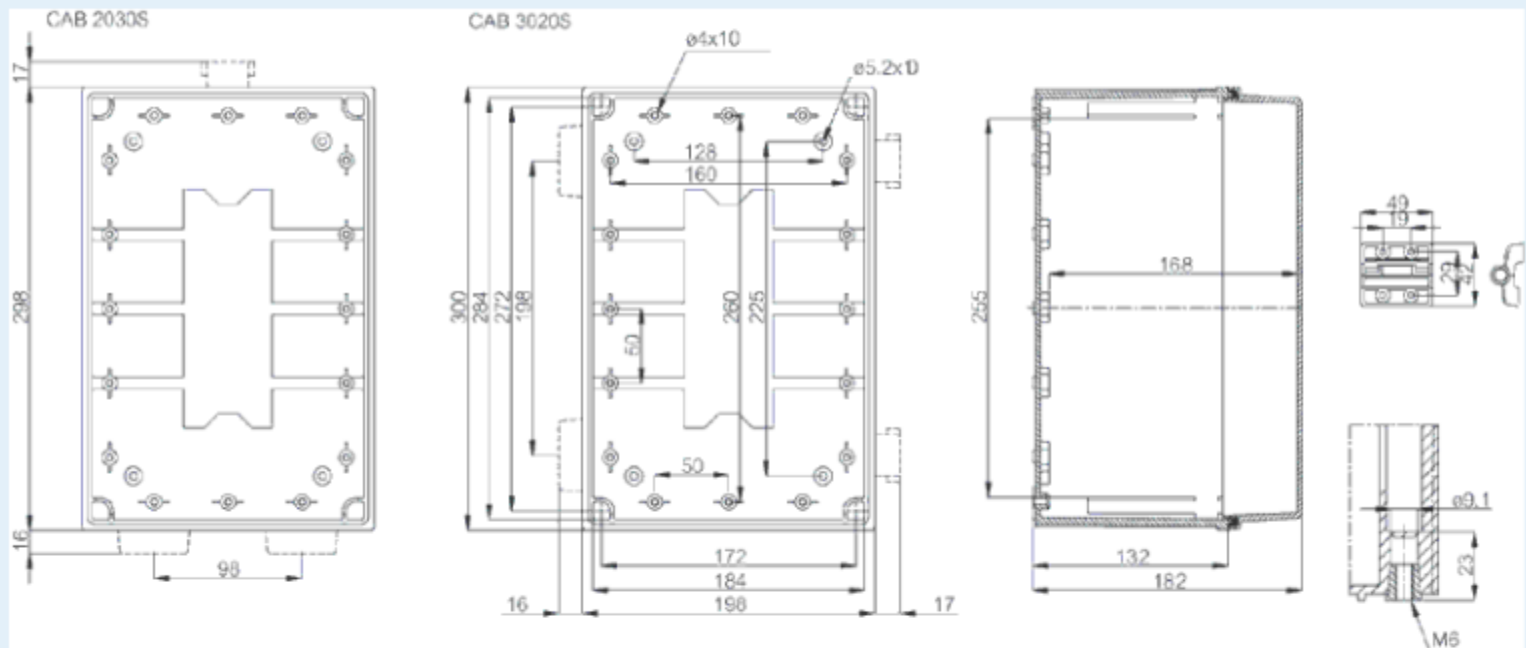

Dimensions:	Height	Width	Depth
mm:	200	300	180
inch:	7.87	11.81	7.09

#### Materials:

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	RAL 7035 -light grey
Gasket material:	Polyurethane

#### Temperatures:

Temperature °C (short term):	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

#### Accessories:

MB 12225 AL	Swing door kit
EKIV 27	DIN-35 Mounting rail. for enclosures: (266 x 35 x 1)
DRF 23	DIN rail frame kit. for enclosures:
FP A 23	Swing-out door/Front panel (aluminum). for enclosures: (168 x 268 x 1)
EKIV 17	DIN-35 Mounting rail. for enclosures: (166 x 35 x 1)
EKIV 23	Back Panel. for enclosures: (170 x 270 x 1)

#### Rating:

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

#### Certificates:

Certificate FI 40854