

Material & Finish :

* Insulation: Nylon 66, Color Nature

* Contact: Brass






Circuit Pattern Schedule:

See Drawing No: CP0111S*

Ordering Code:

CP-01 4 ** * * *
 ① ② ③ ④ ⑤ ⑥


- ① Series No.
- ② Type of Connector:
4= Right angle PCB mount header
- ③ No of Circuits:
- ④ Plating Code:
1= Tin over Nickel
2= Gold flash plated over Nickel
3= 0.38 μ m(15 μ) Gold plated over 1.27 μ m(50 μ) Nickel
4= 0.76 μ m(30 μ) Gold plated over 1.27 μ m(50 μ) Nickel
- ⑤ Variation:
4= UL 94V-2, With mounting pegs
5= UL 94V-0, With mounting pegs
- ⑥ Option: 0= Standard
1= Color Black
3= Color Red
7= Color Blue

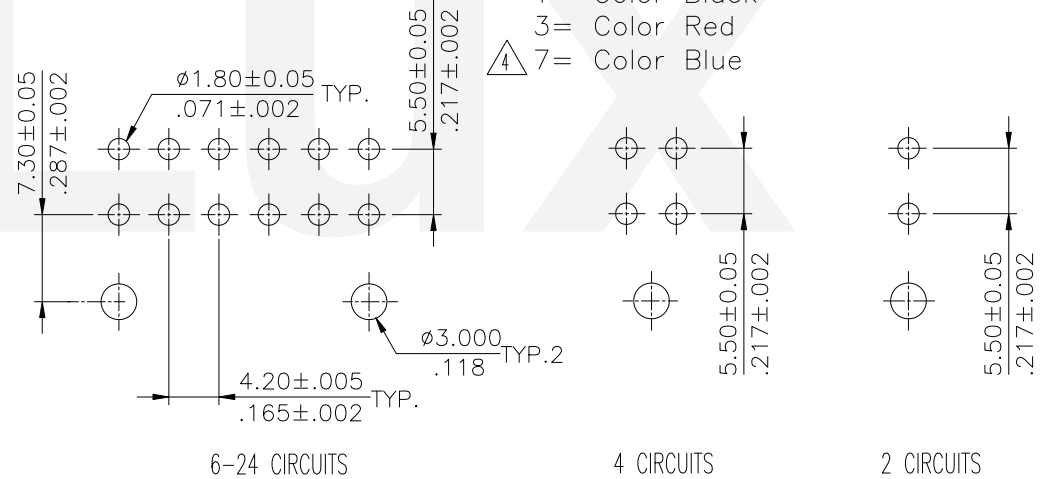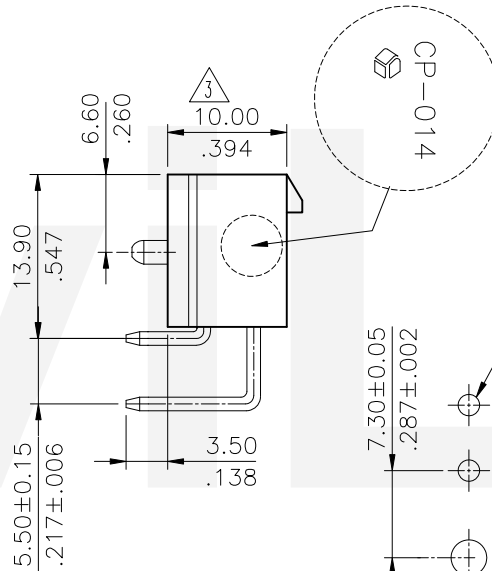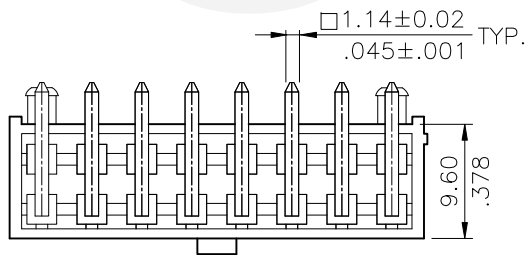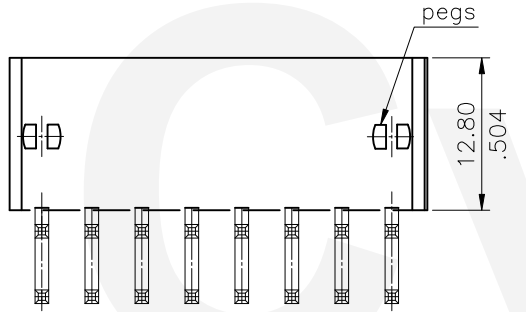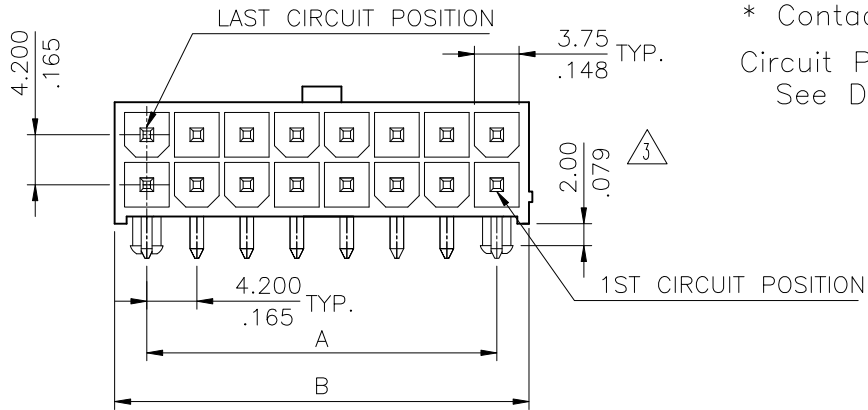

Recommended P.C. Board layout

Tin-Lead Process

RoHS compliant

④	Karen	3/03-20	ECNT120051		DATE	UNIT: mm / inch	TITLE: RIGHT ANGLE HEADER	 瀚荃股份有限公司 CviLux Corporation
③	Eager	8/26-06	ECN06285	DRAWN BY:	Karen	3/04-17'	CP-01 POWER CONNECTOR	
②	Sun	4/30/04	ECN04150	ENGINEER:	Sun	3/09-17'	MATERIAL:	
①	Jessie	9/26/03	ECN03323	CHECKED BY:	Eisley	3/12-17'	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/12-17'	SCALE	
						TOLERANCE UNLESS OTHERWISE SPECIFIED		
						.X ± 0.38/.015		
						.XX ± 0.25/.010		
						.XXX ± 0.10/.004		
						X' ± r		
						X' ±		
						XX' ±		
							DRAWING NO.	CP0108SJ
							PART NO.	CP-014***4* CP-014***5*
							SHEET	1 OF 1

CVILUX
 2020.03.19
 ISSUED