

CTLSH15-30M364

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CTLSH15-30M364 is a high performance 15 Amp silicon Schottky rectifier designed for applications requiring high power capability and a low profile package.

MARKING CODE: CTSH1530

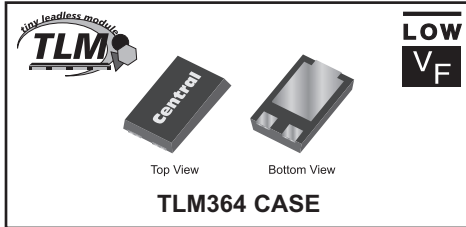

APPLICATIONS:

- DC-DC converters
- Reverse polarity protection
- By-pass diode

FEATURES:

- Low forward voltage, $V_F=0.51V$ TYP @ 15A
- Low profile 1.2mm MAX package height

MAXIMUM RATINGS: ($T_A=25^\circ C$)

Peak Repetitive Reverse Voltage
DC Blocking Voltage
RMS Reverse Voltage
Average Forward Current ($T_L=120^\circ C$)
Peak Forward Surge Current, $t_p=8.3ms$
Operating and Storage Junction Temperature
Thermal Resistance
Thermal Resistance

SYMBOL		UNITS
V_{RRM}	30	V
V_R	30	V
$V_{R(RMS)}$	21	V
I_O	15	A
I_{FSM}	275	A
T_J, T_{stg}	-55 to +150	$^\circ C$
θ_{JA}	110	$^\circ C/W$
θ_{JL}	4.5	$^\circ C/W$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ C$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=30V$		25	100	μA
I_R	$V_R=30V, T_A=125^\circ C$		20	50	mA
BV_R	$I_R=0.5mA$	30			V
V_F	$I_F=15A$		0.51	0.56	V
C_J	$V_R=4.0V, f=1.0MHz$		920		pF

R1 (25-March 2013)


CTLSH15-30M364
SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




TLM364 CASE - MECHANICAL OUTLINE

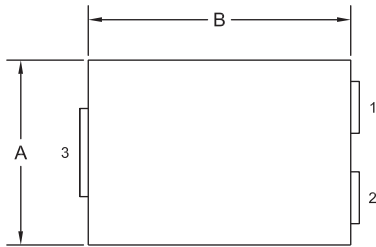

TOP VIEW

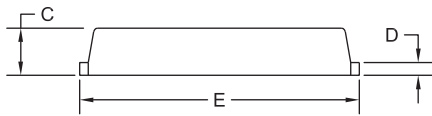

SIDE VIEW

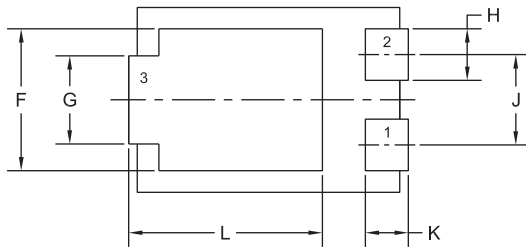


BOTTOM VIEW R0

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.167	0.172	4.25	4.35
B	0.238	0.243	6.05	6.15
C	0.039	0.048	1.00	1.20
D	0.009	0.014	0.25	0.35
E	0.250	0.262	6.35	6.65
F	0.128	0.136	3.25	3.45
G	0.076	0.085	1.95	2.15
H	0.044	0.052	1.10	1.30
J	0.083		2.10	
K	0.035	0.044	0.90	1.10
L	0.171	0.183	4.35	4.65

TLM364 (REV:R0)

SUGGESTED MOUNTING PADS
 (Dimensions in mm)

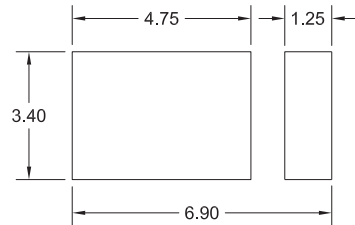

R0

LEAD CODE:

- 1) Anode
- 2) Anode
- 3) Cathode

MARKING CODE: CTSH1530

R1 (25-March 2013)


CTLSH15-30M364

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




TYPICAL ELECTRICAL CHARACTERISTICS


Leakage Current

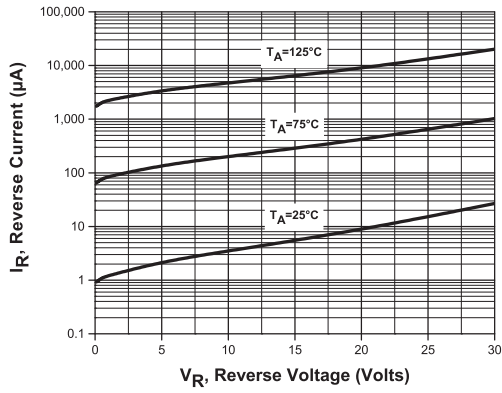


Forward Voltage

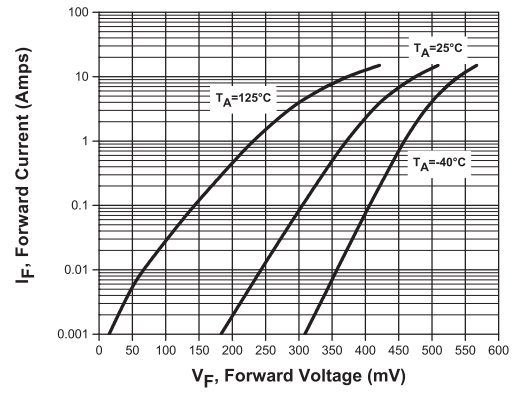

Capacitance

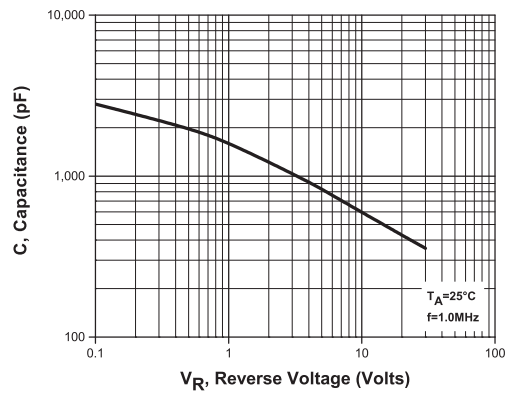

Current Derating

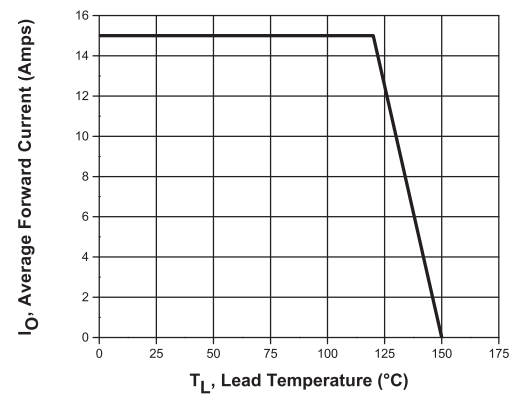

R1 (25-March 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms