



www.lemo.com

SUMMARY

Wires

Low voltage 2



Image is for illustrative purpose only

Series 00

Termination type Female solder

IP rating 50

AWG wire size 34.00 - 28.00

Cable Ø 0.00 - 0.00 mm

Status Active

Matching parts FGG.00.302.CLAD35

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model EG*: Fixed receptacle, nut fixing

Keying No keying

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

Weight 2.54 g

Performance

Configuration 00.302 : 2 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 3.5 Amps

Specifications

Contact Type: Solder

Contact Dia.: 0.5 mm (0.02in) Bucket Dia.: 0.4 mm (0.016in)

Max. Solid Conductor: 0.09 mm² (AWG 28) Max. Stranded Conductor: 0.05 mm² (AWG 30)

R (max): 8.7 mOhm


Vtest (contact-shell): 950 V (AC), 1340 V (DC) Vtest (contact-contact): 1000 V (AC), 1400 V (DC)

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

Salt Spray Corrosion: >1000 hr 12NC part number: 4022.438.73020

DRAWINGS

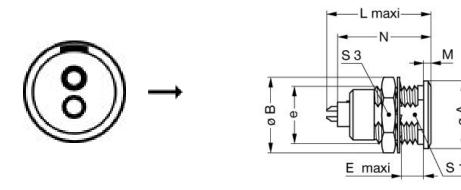

No keying

Dimensions

	А	В	Е	L	М	N	S1	S3	е
mm.	8	10.3	6	15.5	1	13.7	6.3	9	M7x0.5
in.	0,31	0,41	0,24	0,61	0,04	0,54	0,25	0,35	

RECOMMENDED BY LEMO

Tools

Cables

CMN.02.T28.030PGCE	PVC	GREY	
CMN.02.T28.030PGZE		Grey	= =
CMN.02.T28.030PNCE	PVC	Black	->-
CMN.02.T28.030PNZE			= =

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

102080	PVC	Grey	
2050	PVC	Black	=======================================
20550	PUR	Black	=
20560	PUR	White	-
2080	PVC	Grey	
2280	PVC	Black	
4082	PVC	Grey	
CMB.02.210.635	PUR	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.