


REV	MODIFICATION	UPDATE DATE	SIGNATURE

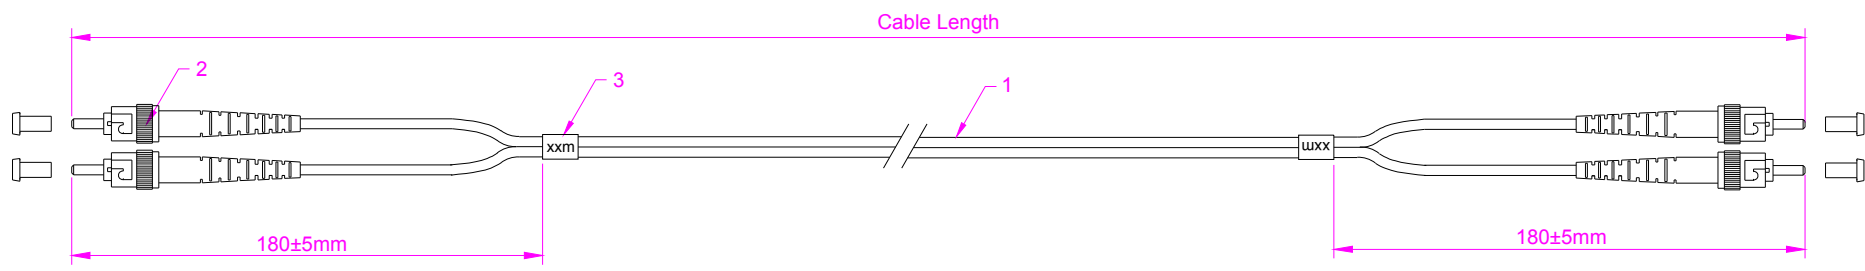

Technical requirements:

1. Performance requirements:

Insertion loss: IL≤0.2dB


Return loss: RL≥55dB

2. Fiber optic connectors meet IEC 61754, YDT1272 standards

3. Optical fiber cable in line with IEC60793-1, IEC 60794 standards

4. Fiber optic jumper complies with IEC 61300, GR-326, TIA/EIA568-B standards

5. A-B/B-A

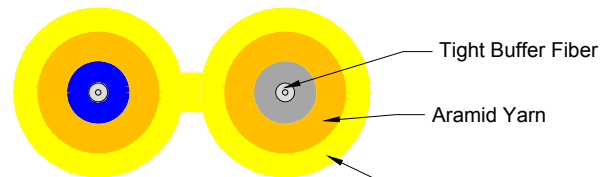

Cable Structure

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	G657A1
Cable Diameter	2.0mm	Attenuation	@1310nm <0.4dB/km		
Cable Material	PVC		@1550nm <0.3dB/km		
Tensile Strength	Long Term	60 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	100 N		Short Term	500 N/100mm
Bending Radius	Static	30 D	Temperature Range	Storage Temperature	
	Dynamic	50D		-20 ~ +60	
				Operating Temperature	
				-20 ~ +60	

ITEM	QTY	P/N	SPECIFICATIONS			
3	2		Cable Label			
2	2		ST/UPC SM 2.0mm Duplex Connector(Metal Housing Yellow Boot)			
1	A/R		OD: 2.0mm, Singlemode 9/125 G657A1 ,Duplex, Fiber Optic Cable, Color: Yellow, PVC			



DRAW	Taylor Scott	DATE	18-08-2021	TITLE: Fiber Optic Patch Cord ST/UPC-ST/UPC Duplex 2.0mm Singlemode		
CHECK	Lihuanhuan	APPROVED		CUSTOMER NO	DWG NO	FJ9STST-XXM
					REV	A