



specifications


Consumption	Lumen Output	Efficacy	Base	Voltage	CRI	Lens	Heat Sink	L70 hours	Beam Angle	Ambient Temp (F)	Power Factor	UL listing	THD
1.2 W	162	135 lm / W	BA15s	10-30 V ⚡	> 80	clear polycarbonate	aluminum	50,000	120°	-40° - 113°	> 0.9	IP40	< 20%

select your lamp


Part Number	Color Temp
GI-1156S-W120-30	3000K
GI-1156S-C120-30	5000K

other

Dimensions	Warranty	Gross Weight	Case QTY
1.53" x 1.05"	6 years	< 1 lbs	1 pcs



Unit : mm

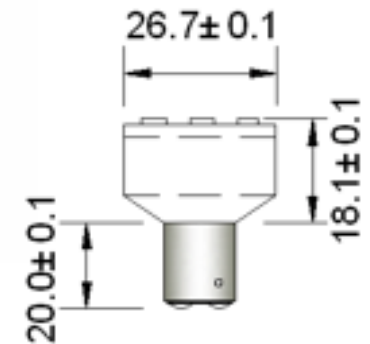

Features

- > No UV or IR radiation
- > 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- > 80% energy savings compared to HID technology

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.

