
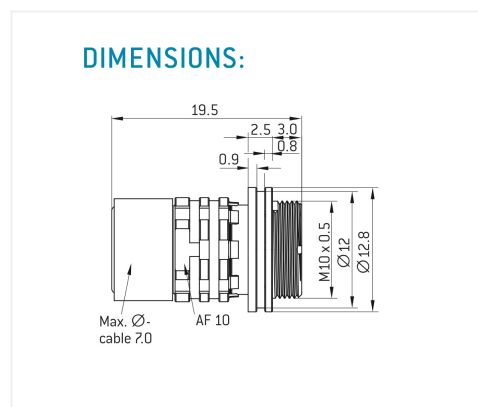
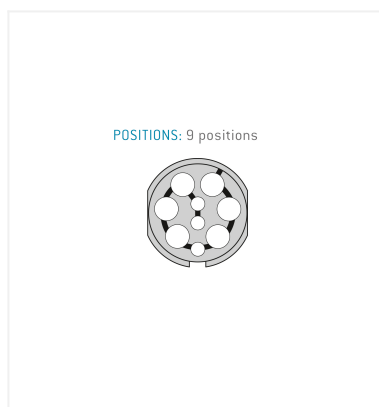
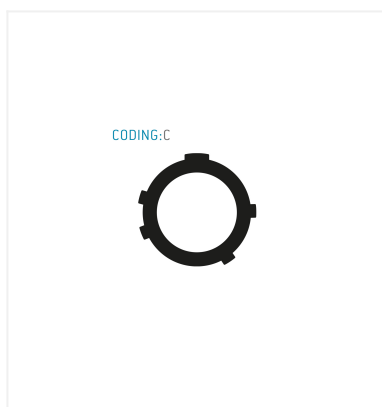


ODU AMC® HD, In-line receptacle with screw-lock

General information

| | |
|-------------------|---------------------------|
| Part number | KCOWCM-P09WMM0-0000 |
| Termination | Solder |
| Size | 0 |
| Locking principle | Break-Away , Screwlocking |
| Coding | C (blue) |
| Cable Diameter | 3.2 – 7.0 mm |
| Cable outlet | For overmolding |



Contact insert description

| | |
|--------------------|------------------------------|
| Number of contacts | 9 |
| Contact type | Sockets |
| Contact diameter | 3x 0.3 mm; 6x 0.7 mm |
| Insulator material | PEEK |
| Wire cross section | AWG 22; AWG 28 |
| Termination | Solder |
| Data transmission | USB 2.0 (480 Mbit/s) + Power |

Reverse gender on request

Connection diagram

| Pos. | Signal |
|------------------|------------------|
| 1, 2, 3, 5, 6, 7 | Power |
| 8, 9 | USB 2.0 (D+, D-) |
| 4 | Discrete |

Technical information

| | | |
|---------------------------------------|------------|--|
| Nominal current single contact | 1 A; 5 A | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Test voltage | 0.75 kV DC | EIA-364-20F:2019-02 |

All shown connectors are rated to a safety extra low voltage (SELV) of less than 50 V AC / 75 V DC, according to IEC 61140:2016 (VDE 0140-1:2016) Protection against electric shock - Common aspects for installation and equipment. In case other standards rule a specific use of the connector, the application specific safety criteria shall be considered first. In this context, lower voltage ratings may be valid. Warning: Danger to life for operating voltages above 50 V AC / 120 V DC!

Mechanical and environmental data

| | |
|------------------------------|-----------------|
| Degree of protection* | IP6K8 / IP6K9K |
| Operating temperature | -51 °C – 125 °C |
| Mating cycles | 5000 |

*mated condition

Material and surface treatments

| | |
|----------------|--------------------------------|
| Housing | Cu-alloy with ruthenium finish |
| Contact | Cu-alloy with gold finish |

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications of the respective standard data transmission protocol.

All shown connectors are defined without breaking capacity (COC) according to IEC 61984:2008 (VDE 0627:2009).

The contact arrangement of an ODU data transmission connector differs from a standard data transmission connector due to the robust ODU specific design. However, the ODU design meets the electrical specifications of the respective standard data transmission protocol.

ODU MEDI-SNAP® and MINI-SNAP® are UL-approved (E110586).

ODU reserves the right to make changes based on the current state of knowledge without prior notice without being obliged to provide replacement deliveries or refinements of older designs.