




1			2			3			4			5			6			7			8		
MOLD TYPE	MOLD NO.	ITEM	REV.	ECN NO.	DATE	BY	DESCRIPTION																
CONN1 OVERMOLD	CPO0241	3,4	01		Sep/03/2020	Aine Li	RELEASED																



CONN 1

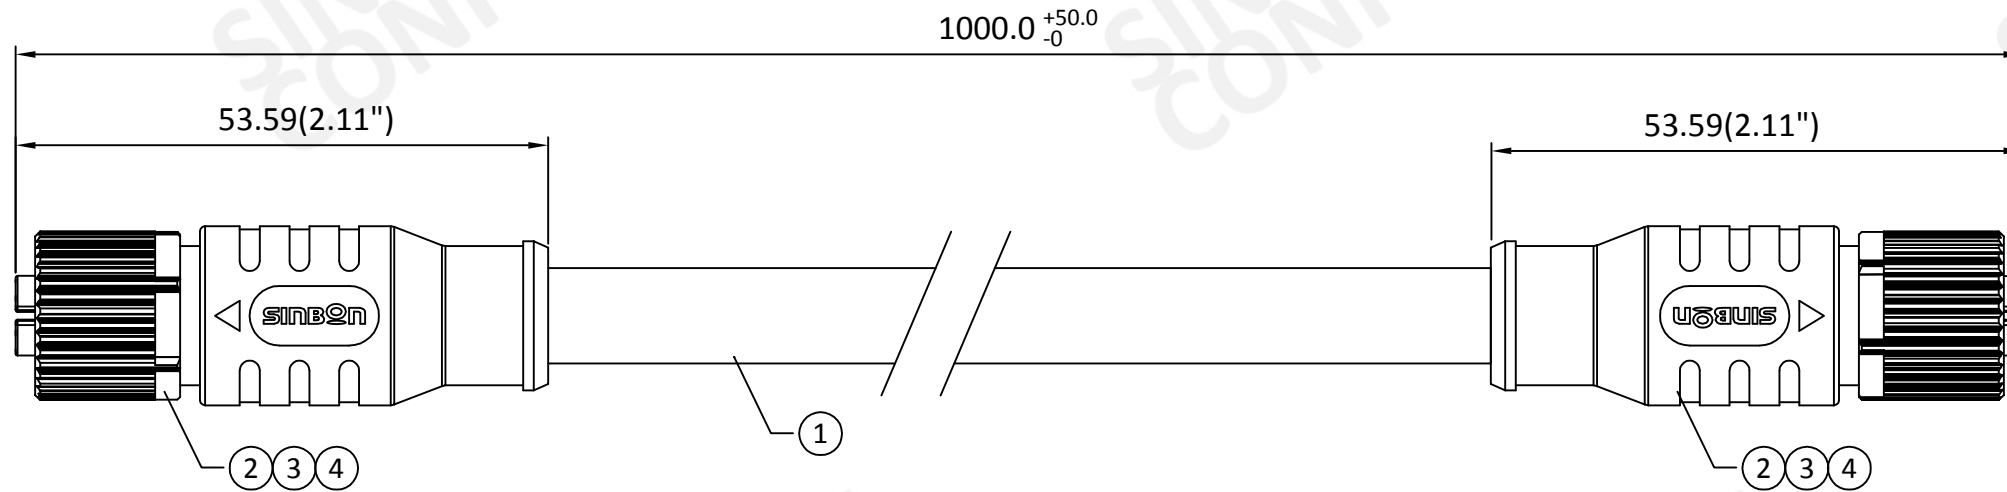

CONN 2

AWG	CONN 1		COLOR	CONN 2
24	1	○ ○ ○ ○	WHITE/ORANGE	1
	2	○ ○ ○ ○	ORANGE	2
	3	○ ○ ○ ○	WHITE/GREEN	3
	4	○ ○ ○ ○	GREEN	4
	5	○ ○ ○ ○	WHITE/BROWN	5
	6	○ ○ ○ ○	BROWN	6
	7	○ ○ ○ ○	WHITE/BLUE	7
	8	○ ○ ○ ○	BLUE	8

NOTES:

- TESTING SPEC.:
COND. RESISTANCE: 3Ω MAX.
INSUL. RESISTANCE: 10MΩ MIN.
TESTING VOLTAGE: 300V DC
- IP67 WHEN MATED.
- FOLLOW IPC620 CLASS II STANDARD TO ASSEMBLY AND INSPECTION.
- RoHS COMPLIANCE.

4.	A/R	TPU, SHORE A 78, NATURAL, HF (A51100057001SD)
3.	A/R	PLASTIC MASTERBATCH, BLACK, FORTPU (A88270010001SD)
2.	2	I/O CONN., FEMALE, 8P (A30150225001SD)
1.	A/R	CABLE, CAT.6, UTP PATCH CABLE, #24*4P, OD=5.6
ITEM	QTY	DESCRIPTION

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.

CUSTOMER:		DigiKey		SINBON Electronics Co., Ltd.	
CUSTOMER P/N:		N/A		REV. N/A	
UNLESS OTHERWISE SPECIFIED TOLERANCE:		DRA. Sep/03/2020		DESCRIPTION: 8P F-F X anti-vibe IP67, 1M	
1 ~ 10 : ±1		CHK. Aine Li		PART NUMBER: M12X-08CFS00-UL24N10	
11 ~ 30 : ±2		APR. Sep/03/2020		REV. 01	
31 ~ 50 : ±3		CHK. Kevin Qiu		SIZE A3	
51 ~ 200 : ±5		APR. Sep/03/2020		UNIT mm	
201 ~ 400 : ±7		CHK. Kevin Qiu		SCALE NONE	
> 401 : ±10				SHEET 1 of 1	
ANGLES : ±1°					