


# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Test disconnect terminal block, with slide, nom. voltage: 500 V, nominal current: 41 A, connection method: Screw connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup> - 10 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

## Your advantages

- Touch-proof test sockets with 4 mm diameter are already permanently integrated
- The terminal blocks can be fitted with fixed and switchable bridges on both sides

## Commercial data

Item number	0311126
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE12
Product key	BE1233
Catalog page	Page 525 (C-1-2019)
GTIN	4017918001315
Weight per piece (including packing)	38.36 g
Weight per piece (excluding packing)	37.02 g
Customs tariff number	85369010
Country of origin	TR

## Technical data

### Notes

#### General

Note	<p>When establishing a connection on the open housing side of a feed-through modular terminal block of the same series and size, the block must be provided with a cover if the expected insulation voltage is &gt;320 V.</p> <p>The max. load current must not be exceeded by the total current of all connected conductors.</p>
------	---

### Product properties

Product type	Test disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.31 W

### Connection data

Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>

#### Level 1 above 1 below 1

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	11 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross section AWG	20 ... 8 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
2 conductors with same cross section, solid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

Nominal current	41 A
Maximum load current	50 A (with 10 mm <sup>2</sup> conductor cross section)
Nominal voltage	500 V
Nominal cross section	6 mm <sup>2</sup>

## Dimensions

Width	8.2 mm
Height	99.5 mm
Depth on NS 32	64 mm
Depth on NS 35/7,5	59 mm
Depth on NS 35/15	66.5 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 6 mm <sup>2</sup>	0.72 kA
Short-time withstand current 10 mm <sup>2</sup>	1.2 kA
Result	Test passed

### Power-frequency withstand voltage

Result	Test passed
--------	-------------

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	5 N
Result	Test passed

### Test for conductor damage and slackening

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross section/weight	0.5 mm <sup>2</sup> / 0.3 kg
	6 mm <sup>2</sup> / 1.4 kg
	10 mm <sup>2</sup> / 2 kg
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations


Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15
	NS 32
Screw thread	M3

## Drawings

Schematic diagram

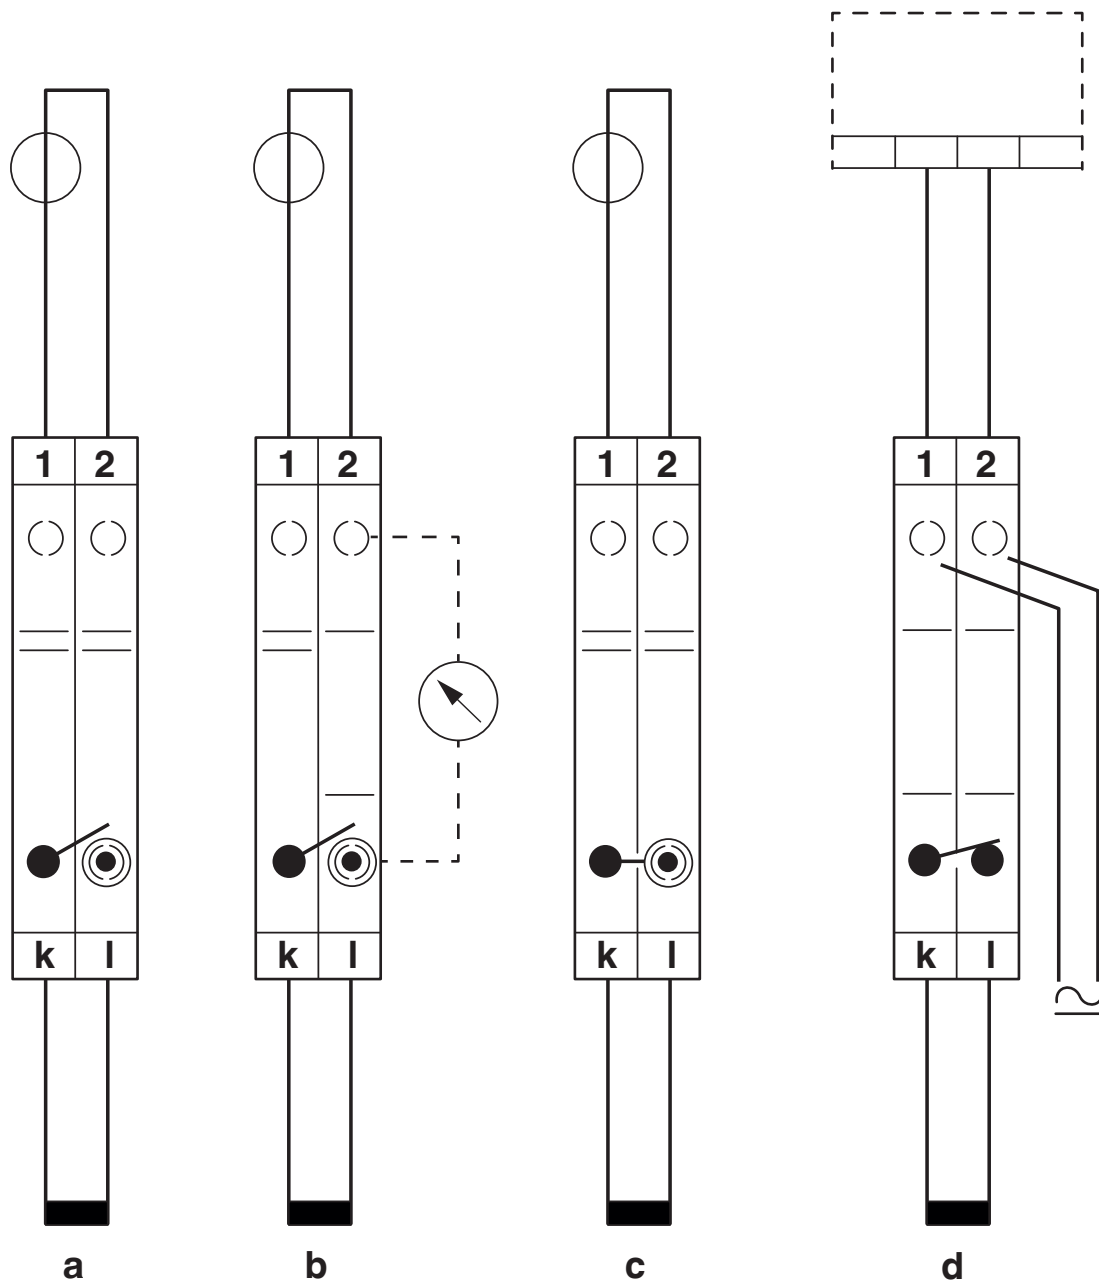

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer testing


d = relay testing

URTK/SP - Test disconnect terminal block



0311126  
<https://www.phoenixcontact.com/us/products/0311126>

Schematic diagram

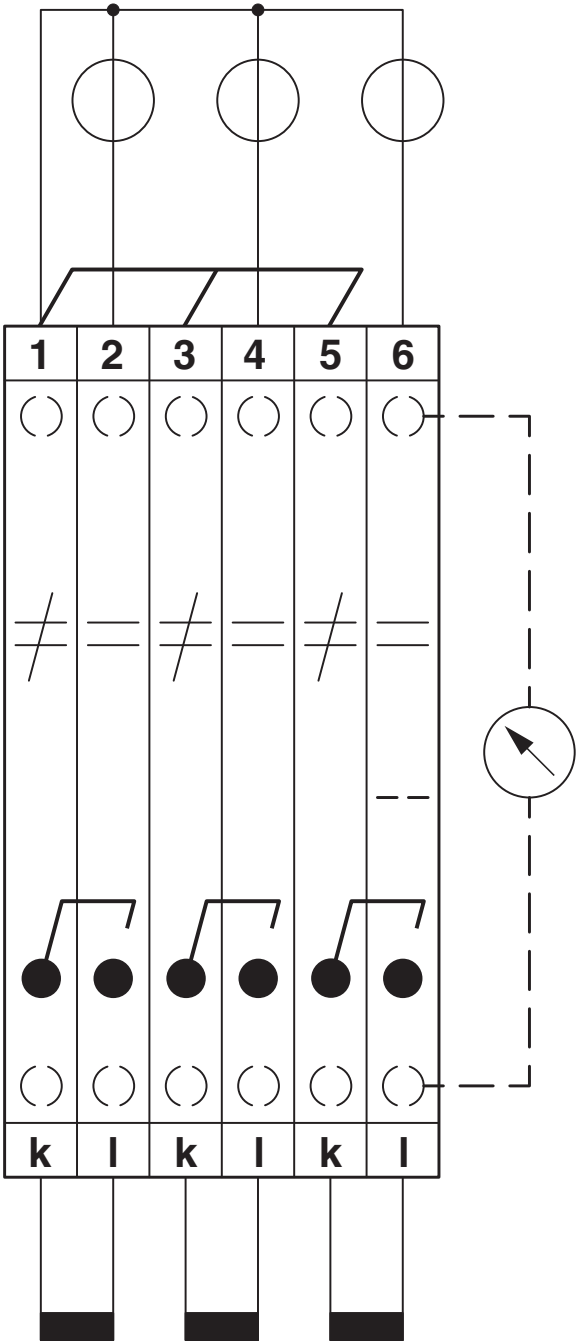


Three-phase linked transducer test set

# URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>

Connection diagram

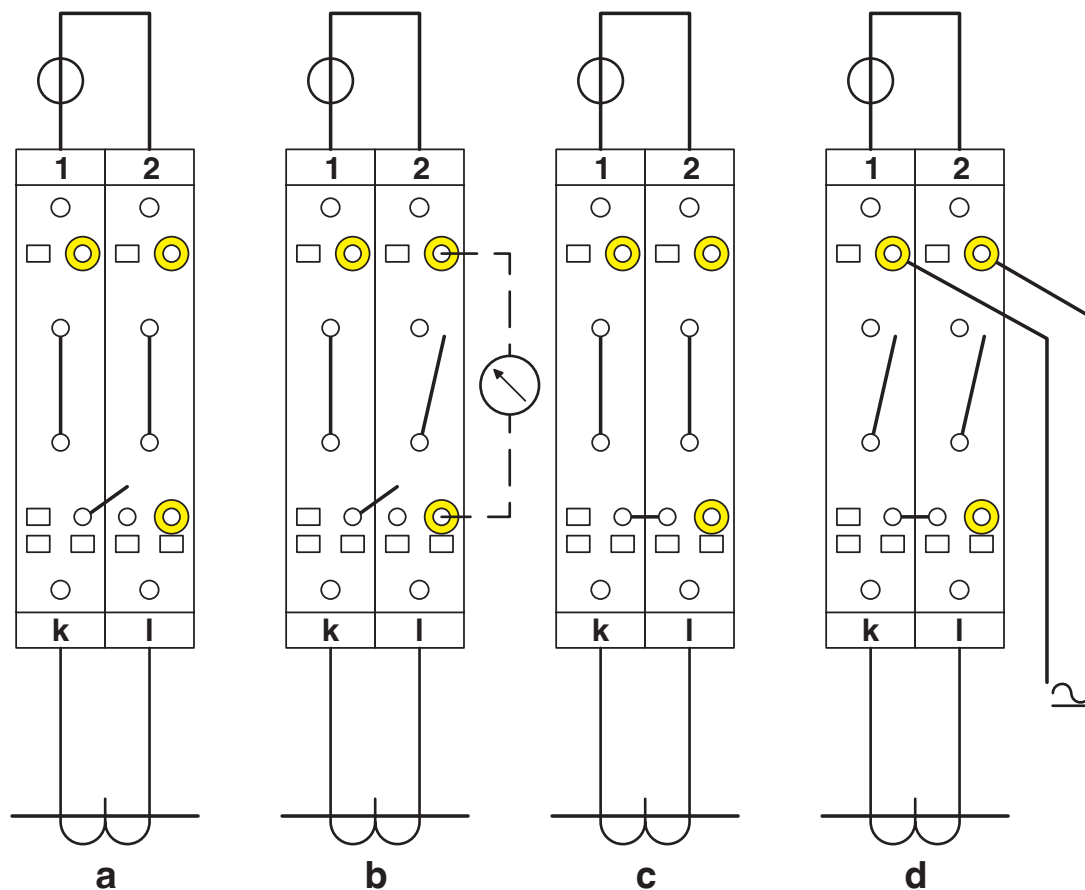

Simple current transformer test circuit

a = normal operation

b = measured value testing

c = transformer testing

d = relay testing




# URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



Circuit diagram

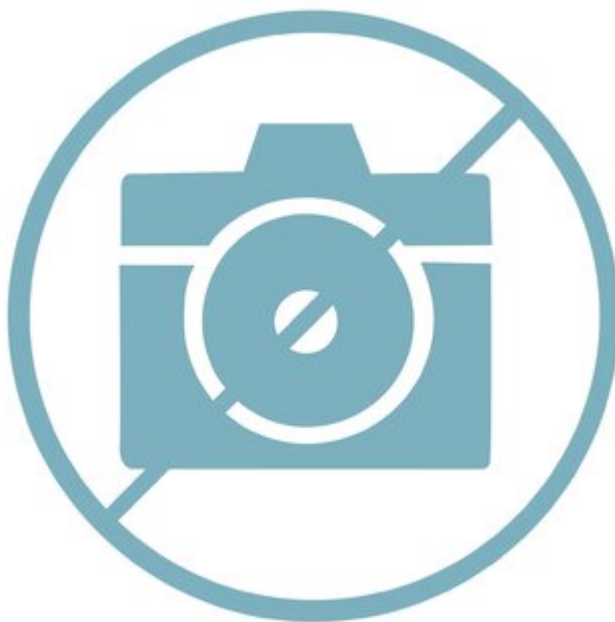


URTK/SP - Test disconnect terminal block



0311126  
<https://www.phoenixcontact.com/us/products/0311126>

Schematic diagram

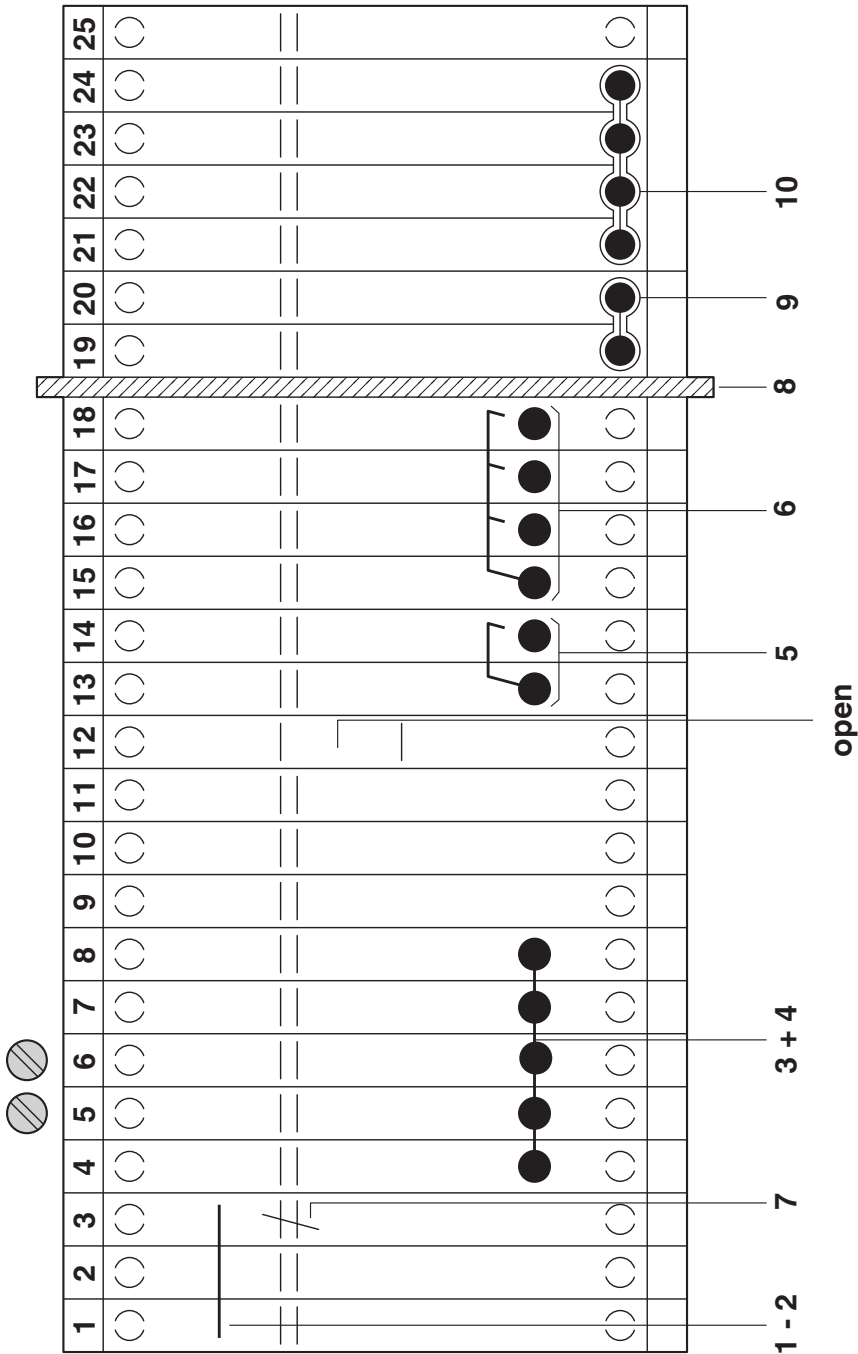

Three-phase transducer test set

Circuit diagram



# URTK/SP - Test disconnect terminal block





0311126

<https://www.phoenixcontact.com/us/products/0311126>


## Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/0311126>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	300 V	45 A	26 - 8	-

 <b>IECEE CB Scheme</b> Approval ID: NL-42274				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	500 V	-	-	- 6

 <b>EAC</b> Approval ID: RU C-DE.AI30.B.01102				
--	--	--	--	--

 <b>cULus Recognized</b> Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B				
	300 V	45 A	26 - 8	-
Use group C				
	300 V	45 A	26 - 8	-

 <b>KEMA-KEUR</b> Approval ID: 71-102522				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	500 V	-	-	- 6

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
---	--	--	--	--

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## Classifications

### ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250109

### ETIM

ETIM 8.0	EC000902
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## Accessories



Note: Applying some accessories below might limit this product.

### IS-K 10 - Bridge bar isolator

1303337

<https://www.phoenixcontact.com/us/products/1303337>



Bridge bar isolator, color: gray

---

### ISSBI 10- 8 - Bridge

0301534

<https://www.phoenixcontact.com/us/products/0301534>



Bridge, pitch: 8 mm, number of positions: 10, color: silver



Max. current carrying capacity: 35 A

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## FBI 2- 8 - Fixed bridge

0200020

<https://www.phoenixcontact.com/us/products/0200020>

Fixed bridge, pitch: 8 mm, number of positions: 2, color: silver



---

## FBI 4- 8 - Fixed bridge

0200046

<https://www.phoenixcontact.com/us/products/0200046>

Fixed bridge, pitch: 8 mm, number of positions: 4, color: silver





# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## FBI 3- 8 - Fixed bridge

0200059

<https://www.phoenixcontact.com/us/products/0200059>

Fixed bridge, pitch: 8 mm, number of positions: 3, color: silver



---


## FB 10- URTK/SP - Fixed bridge

0311663

<https://www.phoenixcontact.com/us/products/0311663>

Fixed bridge, pitch: 8.2 mm, number of positions: 10, color: silver



 Max. current carrying capacity: 50 A

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>


## FBI 10- 8 - Fixed bridge

0203263

<https://www.phoenixcontact.com/us/products/0203263>

Fixed bridge, pitch: 8 mm, number of positions: 10, color: silver



 Max. current carrying capacity: 50 A

---

## EB 2- 8 - Insertion bridge

0202154

<https://www.phoenixcontact.com/us/products/0202154>

Insertion bridge, pitch: 8 mm, number of positions: 2, color: gray



# URTK/SP - Test disconnect terminal block

0311126


<https://www.phoenixcontact.com/us/products/0311126>



## EB 3- 8 - Insertion bridge

0202141

<https://www.phoenixcontact.com/us/products/0202141>




Insertion bridge, pitch: 8 mm, number of positions: 3, color: gray

---

## EB 10- 8 - Insertion bridge

0202138

<https://www.phoenixcontact.com/us/products/0202138>



Insertion bridge, pitch: 8 mm, number of positions: 10, color: gray

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## S-URTK/SP - Switching lock

0311155

<https://www.phoenixcontact.com/us/products/0311155>



Switching lock, length: 12 mm, width: 8.2 mm, height: 12 mm, color: white

---


## SB 4-URTK/SP - Switching jumper

0360025

<https://www.phoenixcontact.com/us/products/0360025>



Switching jumper, pitch: 8.2 mm, number of positions: 4, color: silver

 Max. current carrying capacity: 35 A

# URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>


## SB 2-URTK/SP - Switching jumper

0360012

<https://www.phoenixcontact.com/us/products/0360012>



Switching jumper, pitch: 8.2 mm, number of positions: 2, color: silver

 Max. current carrying capacity: 35 A

---


## EB 4- 8 - Insertion bridge

0202142

<https://www.phoenixcontact.com/us/products/0202142>



Insertion bridge, pitch: 8 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 41 A

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## EB 1/3/5/7-8 - Insertion bridge

3072340

<https://www.phoenixcontact.com/us/products/3072340>



Insertion bridge, pitch: 16.4 mm, number of positions: 4, pin assignment: 1, 3, 5, 7, length: 24 mm, color: gray


 Max. current carrying capacity: 41 A

---

## EB 1/3/5-8 - Insertion bridge

3072341

<https://www.phoenixcontact.com/us/products/3072341>



Insertion bridge, pitch: 16.4 mm, number of positions: 3, pin assignment: 1,3,5, length: 24 mm, color: gray

 Max. current carrying capacity: 41 A

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## KSSI 4-8 - Short-circuit connector

3000735

<https://www.phoenixcontact.com/us/products/3000735>

Short-circuit connector, pitch: 8 mm, number of positions: 4, color: black



---

## KSSI 2-8 - Short-circuit connector

3000722

<https://www.phoenixcontact.com/us/products/3000722>

Short-circuit connector, pitch: 8 mm, number of positions: 2, length: 11 mm, color: black



# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## ATP-URTK/SP - Partition plate

0311139

<https://www.phoenixcontact.com/us/products/0311139>

Partition plate, length: 99 mm, width: 2 mm, height: 99 mm, color: gray



---

## SBS 8:UNBEDRUCKT - Marker card

1007235

<https://www.phoenixcontact.com/us/products/1007235>

Marker card, Card, white, unlabeled, can be labeled with: Marker pen, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 6 x 8.1 mm





# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

AP-ME

METER - Cover profile

3034361

<https://www.phoenixcontact.com/us/products/3034361>



Cover profile, for covering terminal strips, snapped onto APT-ME cover profile carrier or APH-ME end bracket. A cover profile carrier should be positioned at the ends and at intervals of around 40 cm. Length supplied: 1 m

# URTK/SP - Test disconnect terminal block


0311126

<https://www.phoenixcontact.com/us/products/0311126>

## APH-ME - Cover profile carrier

3034374

<https://www.phoenixcontact.com/us/products/3034374>



Cover profile carrier, for mounting on NS 35/7,5 DIN rail, for fixing the AP-ME cover profile, can be sealed as an option

---

## APT-ME - Cover profile carrier

3034358

<https://www.phoenixcontact.com/us/products/3034358>



Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME

## URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



## AH-ME - Covering hood

3240265

<https://www.phoenixcontact.com/us/products/3240265>



**Cover**, for the contact- and dust-protected encapsulation of the components

---

## TS-UT 6-T/SP - Separating plate

3072821

<https://www.phoenixcontact.com/us/products/3072821>



Separating plate, length: 105.2 mm, width: 1 mm, height: 105.2 mm, color: gray

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## SCP 2-8 - Short-circuit connector

3070402

<https://www.phoenixcontact.com/us/products/3070402>



Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange

---

## SCP 3-8 - Short-circuit connector

3070403

<https://www.phoenixcontact.com/us/products/3070403>



Short-circuit connector, pitch: 8.15 mm, number of positions: 3, color: orange

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## SCP 4-8 - Short-circuit connector

3070404

<https://www.phoenixcontact.com/us/products/3070404>

Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange



---

## SCPI 2-8 - Short-circuit connector

3070423

<https://www.phoenixcontact.com/us/products/3070423>

Short-circuit connector, pitch: 8.15 mm, number of positions: 2, color: orange



## URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



## SCPI 4-8 - Short-circuit connector

3070424

<https://www.phoenixcontact.com/us/products/3070424>



Short-circuit connector, pitch: 8.15 mm, number of positions: 4, color: orange

---

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

# URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)



# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

## URTK/SP - Test disconnect terminal block

0311126

<https://www.phoenixcontact.com/us/products/0311126>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)



# URTK/SP - Test disconnect terminal block




0311126

<https://www.phoenixcontact.com/us/products/0311126>

## ZB 8:UNBEDRUCKT - Zack marker strip

1052002

<https://www.phoenixcontact.com/us/products/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## ZB 8 CUS - Zack marker strip

0825011

<https://www.phoenixcontact.com/us/products/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## UC-TM 8 - Marker for terminal blocks

0818072

<https://www.phoenixcontact.com/us/products/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

## UC-TM 8 CUS - Marker for terminal blocks

0824597

<https://www.phoenixcontact.com/us/products/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## UCT-TM 8 - Marker for terminal blocks

0828740

<https://www.phoenixcontact.com/us/products/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## UCT-TM 8 CUS - Marker for terminal blocks

0829616

<https://www.phoenixcontact.com/us/products/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

# URTK/SP - Test disconnect terminal block




0311126

<https://www.phoenixcontact.com/us/products/0311126>

## ZB 8,LGS:FORTL.ZAHLEN - Zack marker strip

1052015

<https://www.phoenixcontact.com/us/products/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

---

## ZB 8,QR:FORTL.ZAHLEN - Zack marker strip

1052028

<https://www.phoenixcontact.com/us/products/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

# URTK/SP - Test disconnect terminal block

0311126


<https://www.phoenixcontact.com/us/products/0311126>



## ZB 8,LGS:L1-N,PE - Marker for terminal blocks

1052413

<https://www.phoenixcontact.com/us/products/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray

# URTK/SP - Test disconnect terminal block



0311126

<https://www.phoenixcontact.com/us/products/0311126>

## E/UK - End clamp

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



---

## E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)