

# USIG - Fuse modular terminal block



0920083  
<https://www.phoenixcontact.com/us/products/0920083>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, without fuse plug, nom. voltage: 500 V, nominal current: 10 A, 1 level, connection method: Screw connection, Rated cross section: 1.5 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup> - 16 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, NS 32, color: black

## Commercial data

Item number	0920083
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BE12
Product key	BE1234
Catalog page	Page 498 (C-1-2019)
GTIN	4017918010133
Weight per piece (including packing)	28.018 g
Weight per piece (excluding packing)	26.802 g
Customs tariff number	85369095
Country of origin	DE

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## Technical data

### Product properties

Product type	Disconnect terminal block
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	2.43 W

### Connection data

Number of connections per level	2
Nominal cross section	16 mm <sup>2</sup>

#### 1 level

Screw thread	M4
Tightening torque	1.5 ... 1.8 Nm
Stripping length	13 mm
Internal cylindrical gage	A5
Connection in acc. with standard	IEC 60947-7-3
Conductor cross section rigid	0.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Cross section AWG	20 ... 6 (converted acc. to IEC)
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm <sup>2</sup> ... 16 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross-section with insertion bridge, rigid	16 mm <sup>2</sup>
Cross-section with insertion bridge, flexible	16 mm <sup>2</sup>
2 conductors with same cross section, solid	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, flexible	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Nominal current	10 A (is determined by the fuse used)
Maximum load current	40 A (As a disconnect terminal block)
Nominal voltage	500 V (As a fuse terminal block) 500 V (As a disconnect terminal block)
Nominal cross section	1.5 mm <sup>2</sup>

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## Dimensions

Width	10.2 mm
Height	61 mm
Depth on NS 32	56.6 mm
Depth on NS 35/7,5	51.6 mm
Depth on NS 35/15	59.1 mm

## Material specifications

Color	black
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Mechanical properties

### Mechanical data

Open side panel	No
-----------------	----

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-3
----------------------------------	---------------

## Mounting

NS 35/7,5
-----------

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

Mounting type	NS 35/15
	NS 32

## USIG - Fuse modular terminal block


0920083

<https://www.phoenixcontact.com/us/products/0920083>



## Drawings

### Circuit diagram

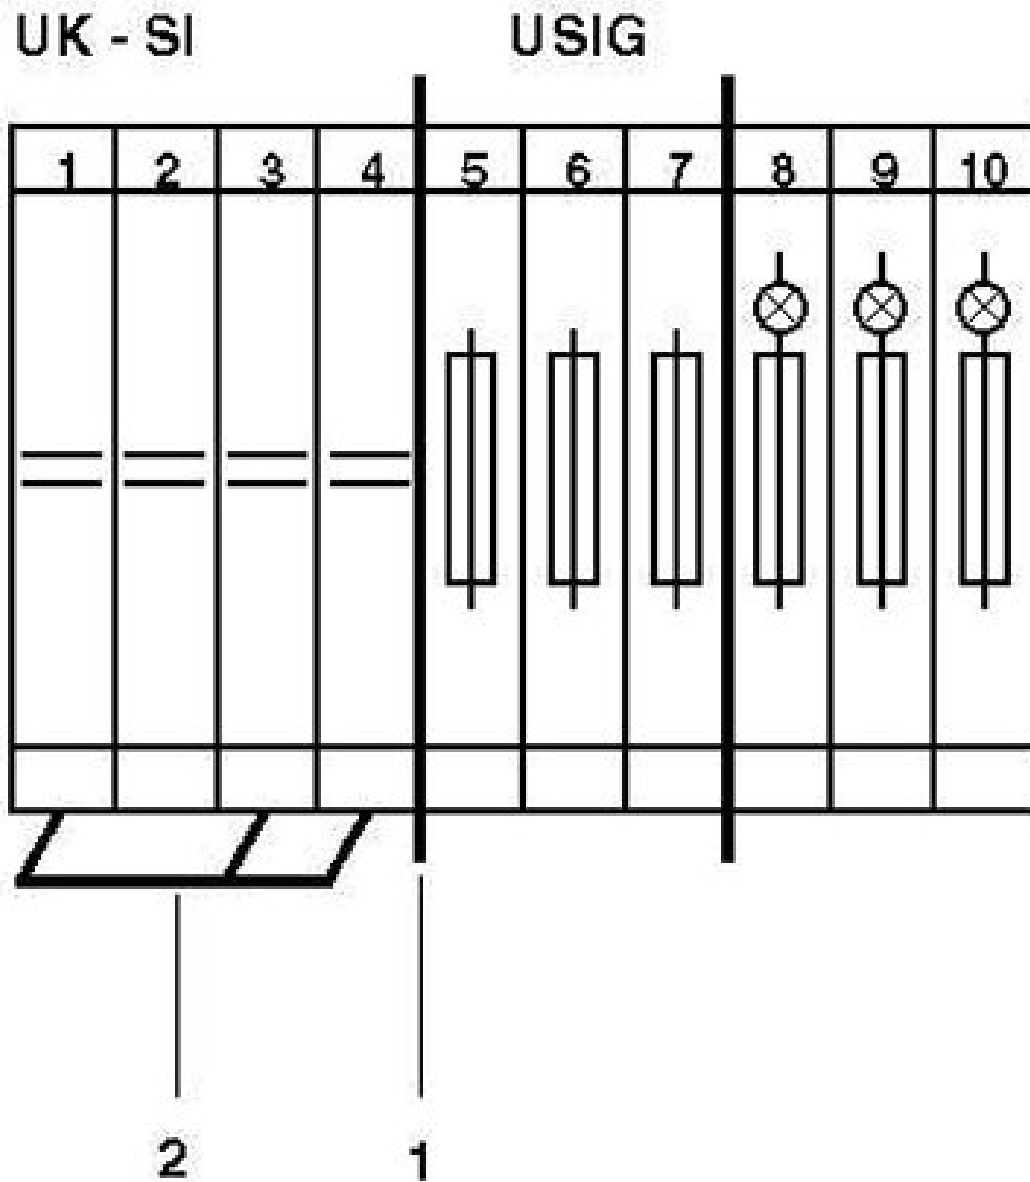


# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>



Circuit diagram

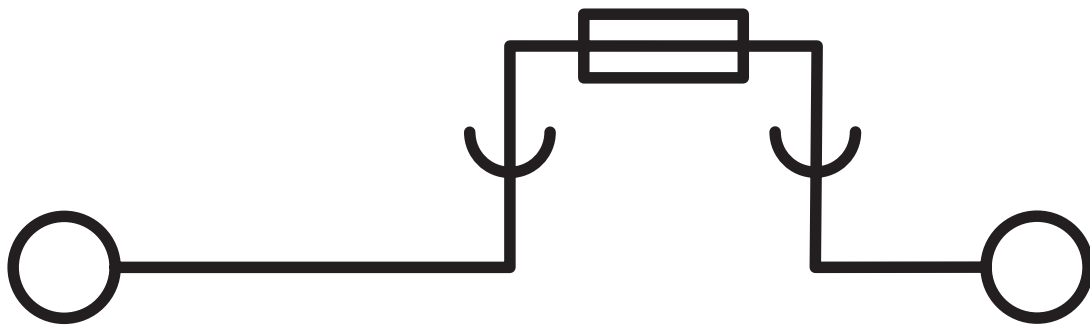

# USIG - Fuse modular terminal block





0920083

<https://www.phoenixcontact.com/us/products/0920083>


## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/0920083>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	600 V	40 A	24 - 8	-
with connector ST 1-Si	250 V	10 A	24 - 8	-
with connector ST-Si	250 V	10 A	24 - 8	-
with connector ST-T	600 V	40 A	24 - 8	-

 <b>UL Recognized</b> Approval ID: E60425				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B				
	600 V	40 A	18 - 8	-
Use group C				
	600 V	40 A	18 - 8	-

 <b>EAC</b> Approval ID: RU C-DE.AI30.B.01102				
-------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534				
-------------------------------------------------------------------------------------------------------------------------------------	--	--	--	--

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## Classifications

### ECLASS

ECLASS-11.0	27141126
ECLASS-12.0	27141126
ECLASS-13.0	27250108

### ETIM

ETIM 8.0	EC000902
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### EB 2-10 - Insertion bridge

0203153

<https://www.phoenixcontact.com/us/products/0203153>

Insertion bridge, pitch: 10 mm, number of positions: 2, color: gray



**i** Max. current carrying capacity: 76 A


---

### EB 10-10 - Insertion bridge

0203137

<https://www.phoenixcontact.com/us/products/0203137>

Insertion bridge, pitch: 10 mm, number of positions: 10, color: gray



**i** Max. current carrying capacity: 76 A

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ST-T - Isolating plugs

0920216

<https://www.phoenixcontact.com/us/products/0920216>



Isolating plugs, for using the basic fuse terminal block as a plug disconnect terminal block, length: 46 mm, width: 7.8 mm, height: 46 mm

---

## ST-SI - Fuse plug

0920229

<https://www.phoenixcontact.com/us/products/0920229>



Fuse plug, nominal current: 400 V, nominal current: 6.3 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ST 1-SI - Fuse plug

0920326

<https://www.phoenixcontact.com/us/products/0920326>



Fuse plug, nominal current: 400 V, nominal current: 10 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

---

## ST-SILED 24 - Fuse plug

0920452

<https://www.phoenixcontact.com/us/products/0920452>



Fuse plug, nominal current: 400 V, nominal current: 6.3 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ST 1-SILED 24 - Fuse plug

0920384

<https://www.phoenixcontact.com/us/products/0920384>



Fuse plug, nominal current: 400 V, nominal current: 10 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

---

## ST-SILA250 - Fuse plug

0920287

<https://www.phoenixcontact.com/us/products/0920287>



Fuse plug, nominal current: 400 V, nominal current: 6.3 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ST 1-SILA 250 - Fuse plug

0920397

<https://www.phoenixcontact.com/us/products/0920397>



Fuse plug, nominal current: 400 V, nominal current: 10 A, connection method: Plug-in connection, length: 45.4 mm, width: 9.9 mm, height: 45.4 mm, color: black

---

## ATS-GSK - Partition plate

0304227

<https://www.phoenixcontact.com/us/products/0304227>



Partition plate, length: 59.5 mm, width: 0.8 mm, height: 59.5 mm, color: gray

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>



## SBS10:UNBEDRUCKT - Marker card

1007248

<https://www.phoenixcontact.com/us/products/1007248>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, perforated, mounting type: snapped, snap into flat marker groove, for terminal block width: 10 mm, lettering field size: 6 x 10.1 mm, Number of individual labels: 250

---

## SZS 1,0X4,0 VDE - Screwdriver

1205066

<https://www.phoenixcontact.com/us/products/1205066>



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 32 PERF 2000MM-VPE 10 - DIN rail perforated

1201002

<https://www.phoenixcontact.com/us/products/1201002>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)

---

## NS 32 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201015

<https://www.phoenixcontact.com/us/products/1201015>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, G profile, color: silver, Pack of 10 (20 m)



# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



---

## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>




DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

---

## ZB 10:UNBEDRUCKT - Zack marker strip

1053001

<https://www.phoenixcontact.com/us/products/1053001>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10.5 x 10.15 mm, Number of individual labels: 10

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>



## ZB 10 CUS - Zack marker strip

0824941

<https://www.phoenixcontact.com/us/products/0824941>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,LGS:FORTL.ZAHLEN - Zack marker strip

1053014

<https://www.phoenixcontact.com/us/products/1053014>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ZB10,QR:FORTL.ZAHLEN - Zack marker strip

1053027

<https://www.phoenixcontact.com/us/products/1053027>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## ZB10,LGS:L1-N,PE - Marker for terminal blocks

1053412

<https://www.phoenixcontact.com/us/products/1053412>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## ZB10,LGS:U-N - Marker for terminal blocks

1053438

<https://www.phoenixcontact.com/us/products/1053438>




Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 10,15 x 10,5 mm, Number of individual labels: 10

---

## UC-TM 10 - Marker for terminal blocks

0818069

<https://www.phoenixcontact.com/us/products/0818069>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## UC-TM 10 CUS - Marker for terminal blocks

0824605

<https://www.phoenixcontact.com/us/products/0824605>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48

---

## UCT-TM 10 - Marker for terminal blocks

0829142

<https://www.phoenixcontact.com/us/products/0829142>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>



## UCT-TM 10 CUS - Marker for terminal blocks

0829623

<https://www.phoenixcontact.com/us/products/0829623>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 8.9 x 9.6 mm, Number of individual labels: 36

---

## CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# USIG - Fuse modular terminal block

0920083

<https://www.phoenixcontact.com/us/products/0920083>

## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray



# USIG - Fuse modular terminal block



0920083

<https://www.phoenixcontact.com/us/products/0920083>

## E/UK - End clamp

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



---

## E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/us/products/1201413>

End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray



---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)