

CK1,6-ER-1,00ST OIC AG - Crimp contact



1004360

<https://www.phoenixcontact.com/us/products/1004360>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17

Commercial data

Item number	1004360
Packing unit	1 pc
Minimum order quantity	100 pc
Sales key	BF65
Product key	BF7AIB
Catalog page	Page 667 (C-2-2019)
GTIN	4055626472539
Weight per piece (including packing)	0.353 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85366990
Country of origin	TR

CK1,6-ER-1,00ST OIC AG - Crimp contact



1004360

<https://www.phoenixcontact.com/us/products/1004360>

Technical data

Notes

General	This product replaces 1884092 CK1,6-ER-0,50ST AG
---------	--

Mounting

Connection method	Crimp connection
-------------------	------------------

Product properties

Product type	Crimp contact
Type	Individual male contact
Contact material type	rolled
Series	HC-M-12
	HC-M-EMV
	HC-D
	HC-DD
	VC-D
	HC-M-03/04
	HC-M-17
	HC-K
	HC-Q
	HC-COM
	HC-M-42


Connection data

Connection method	Crimp connection
Contact connection type	Pin
Connection technology	Crimp connection
Conductor cross section	0.34 mm ² ... 1 mm ²
Connection cross section AWG	22 ... 17
Stripping length of the individual wire	4 mm
Conductor cross section flexible	0.34 mm ² ... 1 mm ²
Conductor cross section AWG	22 ... 17

Material specifications

Contact material	Cu alloy, nickel-plated
Contact surface material	silver-plated

Dimensions

Dimensional drawing	
Width	3.3 mm

CK1,6-ER-1,00ST OIC AG - Crimp contact



1004360

<https://www.phoenixcontact.com/us/products/1004360>

Length	24.5 mm
--------	---------

Mechanical characteristics

Contact diameter	1.6 mm
------------------	--------

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 50
-----------------------------	------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

CK1,6-ER-1,00ST OIC AG - Crimp contact


1004360

<https://www.phoenixcontact.com/us/products/1004360>



Drawings

Dimensional drawing

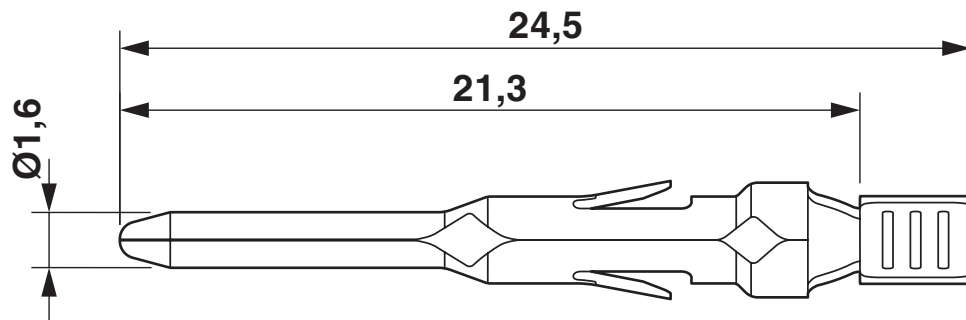

CK1,6-ER-1,00ST OIC AG - Crimp contact



1004360

<https://www.phoenixcontact.com/us/products/1004360>

Classifications

ECLASS

ECLASS-11.0	27440204
ECLASS-12.0	27440204
ECLASS-13.0	27440204

ETIM

ETIM 8.0	EC000796
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

CK1,6-ER-1,00ST OIC AG - Crimp contact



1004360

<https://www.phoenixcontact.com/us/products/1004360>

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

CK1,6-ER-1,00ST OIC AG - Crimp contact

1004360

<https://www.phoenixcontact.com/us/products/1004360>



Accessories

CK1,6-ER-1,00BU OIC AG - Crimp contact

1004362

<https://www.phoenixcontact.com/us/products/1004362>



Crimp contact, contact diameter: 1.6 mm, rolled, Socket, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 0.34 mm² ... 1 mm², AWG 22 ... 17

CRIMPFOX-P CK 1.6 ER 2.5 OIC-L - Crimping pliers

1069228

<https://www.phoenixcontact.com/us/products/1069228>



Crimping pliers, for rolled contacts CK 1,6-ER... OIC, cross section: 0.14 ... 2.5 mm². Unlockable pressure lock, precise parallel crimping, front entry, B crimp, incl. positioning tool

CK1,6-ER-1,00ST OIC AG - Crimp contact

1004360

<https://www.phoenixcontact.com/us/products/1004360>



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/us/products/1089092>

Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections



UNIFOX RT-CK 1.6 - Contact removal tool

1072069

<https://www.phoenixcontact.com/us/products/1072069>

Contact removal tool, for turned and rolled CK- 1.6-... contacts



Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com