


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
01	-	TECHNICAL DATA SHEET RELEASE	27APR17	TZ	TZ



SHIELDED: GREY OVERMOLD

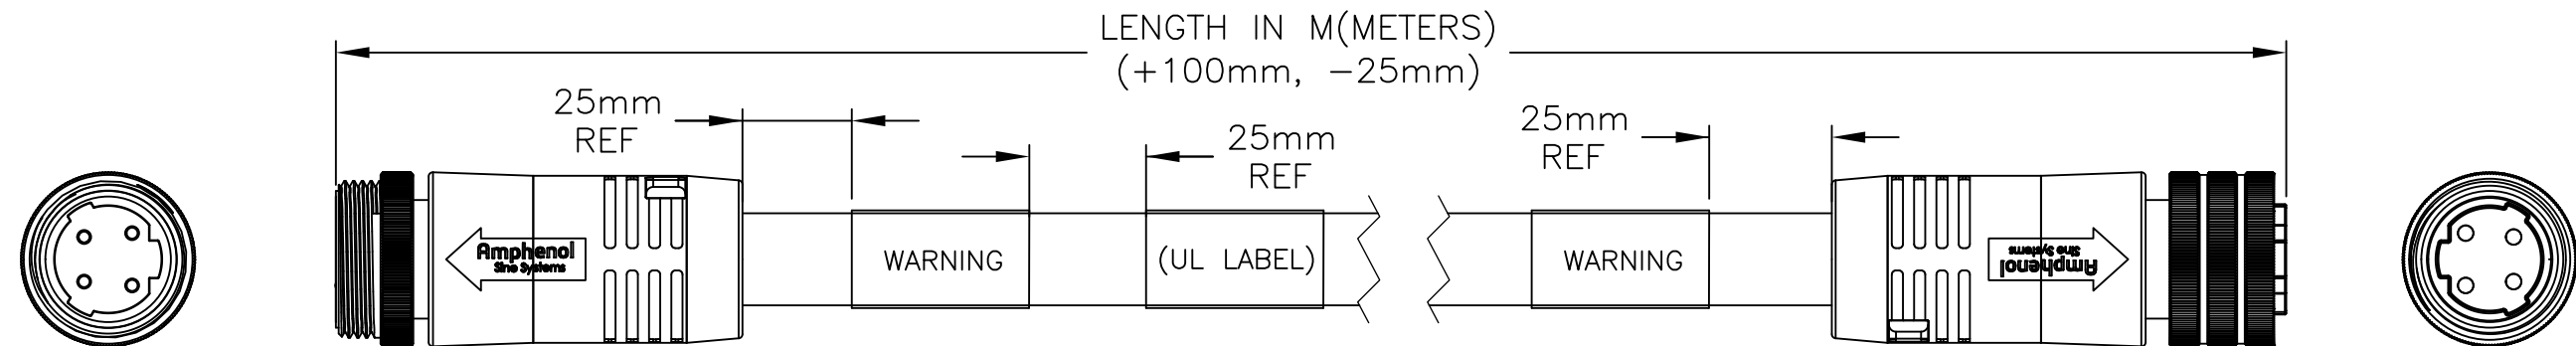

TECHNICAL DATA:

1) MATERIALS:

COUPLING NUT: MACHINED STEEL, NICKEL PLATED
 INSULATION INSERT: THERMOPLASTIC, UL 94V-0
 CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
 OVERMOLD MATERIAL: THERMOPLASTIC
 CONDUCTOR RATING: TC-ER PER UL 1277
 CONDUCTOR INSULATION: XLPE
 NUMBER OF CONDUCTORS: (4) 12AWG

2) ELECTRICAL DATA:


CURRENT (MAX): 25A (2237) 29A (2238)
 VOLTAGE (MAX): 600V AC/DC
 INSULATION RESISTANCE (MIN): 5000M OHMS
 DIELECTRIC TEST VOLTAGE: 2200V

3) MECHANICAL DATA:

TEMPERATURE RANGE: -40°C TO 90°C
 PROTECTION: IP67 (MATED CONDITION)
 MATING CYCLES: >500
 VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
 THERMAL SHOCK PER MIL-STD-202 METHOD 207
 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101

4) RoHS COMPLIANT

5) UL 2237 LISTED ASSEMBLY
 UL FILE NUMBERS: E339703, 224856

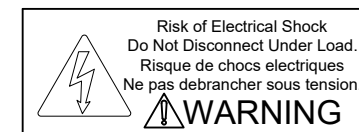

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED		SIGNATURES	
1) All dimensions are in metric(mm).		DATE	
2) Tolerances are as follows:		DRAWN: TZ	28APR17
1 PL DEC ±0.30		CHECKED: TZ	28APR17
2 PL DEC ±0.15		ENGINEER: TZ	
3 PL DEC ±0.08		APPROVAL: TZ	28APR17
3) Note reference = X		CUSTOMER:	
MATERIAL SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
PROCESS SPECIFICATIONS:		NEXT ASSY:	
SCALE: NONE		C- P31387-M()	
SHEET 1 OF 1		REVISION 01	

Amphenol
 Sine Systems - www.sineco.com
 44724 Morley Drive
 Clinton Township, MI 48036

MALE STRAIGHT, FEMALE STRAIGHT, SHLD
 POWER, M29, 12AWG, CABLE ASSY

TITLE: CABLE ASSY
 DWG No: C-P31387-M()
 REV: 01
 SH: 1
 OF: 1