



# PBSS4350SA

## NPN Low Vce(sat) Transistor


<b>Voltage</b>	<b>50V</b>	<b>Current</b>	<b>3A</b>
----------------	------------	----------------	-----------

### Features

- Silicon NPN epitaxial type
- Low Vce(sat) 0.37V(max)@Ic/Ib= 3A/300mA
- High collector current capability
- Excellent DC current gain characteristics
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

### Mechanical Data

- Case: SC-59 Package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0005 ounces, 0.0145 grams

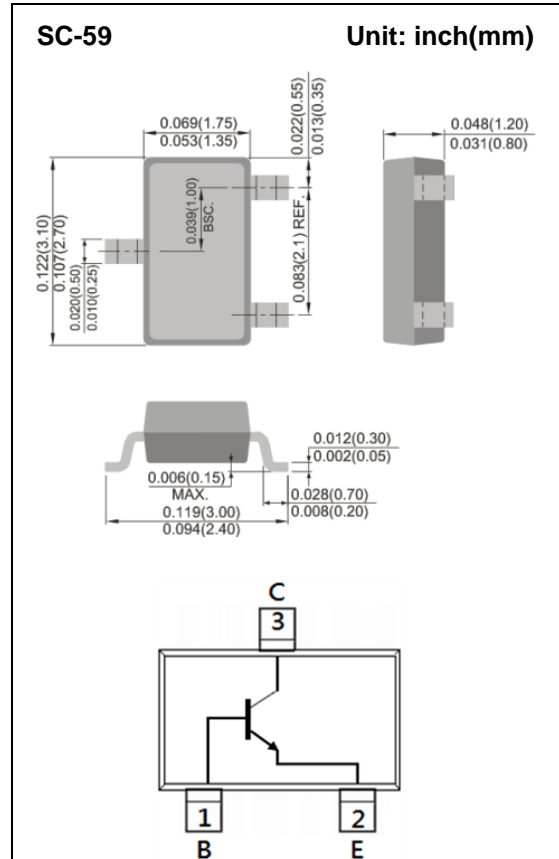

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Collector-Base Voltage	V <sub>CBO</sub>	50	V
Collector-Emitter Voltage	V <sub>CEO</sub>	50	V
Emitter-Base Voltage	V <sub>EBO</sub>	5	V
Collector Current (DC)	I <sub>C</sub>	3	A
Collector Current (Pulse)	I <sub>CP</sub>	5	A
Collector Power Dissipation	P <sub>D</sub>	1.25	W
Operating Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55~150	°C
Typical Thermal Resistance from Junction to Ambient <sup>(Note)</sup>	R <sub>θJA</sub>	100	°C/W

Note: Mounted on FR4 PCB at 1 inch square copper pad.



# PBSS4350SA

## Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
<b>OFF Characteristics</b>						
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C= 10\text{mA}, I_B= 0\text{A}$	50	-	-	V
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C= 0.1\text{mA}, I_E= 0\text{A}$	50	-	-	V
Emitter-Base Breakdown Voltage	$BV_{EBO}$	$I_E= 0.1\text{mA}, I_C= 0\text{A}$	5	-	-	V
Collector-Base Cutoff Current	$I_{CBO}$	$V_{CB}= 50\text{V}, I_E= 0\text{A}$	-	-	100	nA
Emitter-Base Cutoff Current	$I_{EBO}$	$V_{EB}= 5\text{V}$	-	-	100	nA
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CES}= 50\text{V}$	-	-	100	nA
<b>ON characteristics</b>						
DC Current Gain	$h_{FE}$	$V_{CE}= 2\text{V } I_C= 100\text{mA}$	300	-	-	-
		$V_{CE}= 2\text{V } I_C= 500\text{mA}$	300	-	-	
		$V_{CE}= 2\text{V } I_C= 1\text{A}$	300	-	700	
		$V_{CE}= 2\text{V } I_C= 2\text{A}$	200	-	-	
		$V_{CE}= 2\text{V } I_C= 3\text{A}$	100	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C= 500\text{mA}, I_B= 50\text{mA}$	-	-	80	mV
		$I_C= 1\text{A}, I_B= 50\text{mA}$	-	-	160	
		$I_C= 2\text{A}, I_B= 100\text{mA}$	-	-	280	
		$I_C= 2\text{A}, I_B= 200\text{mA}$	-	-	260	
		$I_C= 3\text{A}, I_B= 300\text{mA}$	-	-	370	
Base-Emitter Saturation voltage	$V_{BE(SAT)}$	$I_C= 2\text{A}, I_B= 100\text{mA}$	-	-	1.1	V
		$I_C= 3\text{A}, I_B= 300\text{mA}$	-	-	1.2	
Base-Emitter Turn-on voltage	$V_{BE(on)}$	$I_C= 1\text{A}, V_{CE}= 2\text{V}$	-	-	1.1	V
Transition Frequency	$f_T$	$I_C= -100\text{mA}, V_{CE}= 5\text{V}$ $f=100\text{MHz}$	100	-	-	MHz
Collector Output Capacitance	$C_{OB}$	$V_{CB}= 10\text{V } I_E= 0\text{A},$ $f=1\text{MHz}$	-	-	25	pF



# PBSS4350SA

## TYPICAL CHARACTERISTIC CURVES

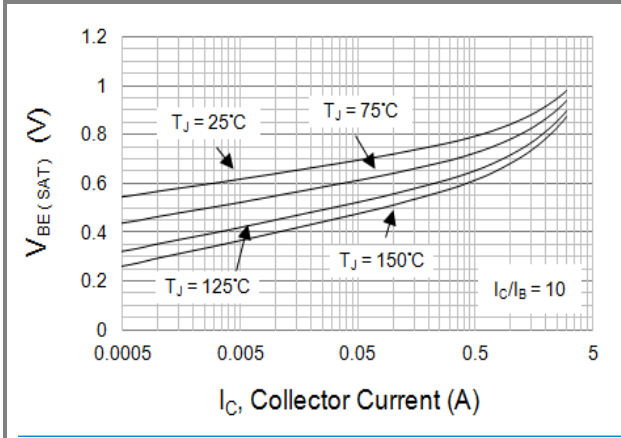


Fig.1 Typical Base-Emitter Saturation Voltage

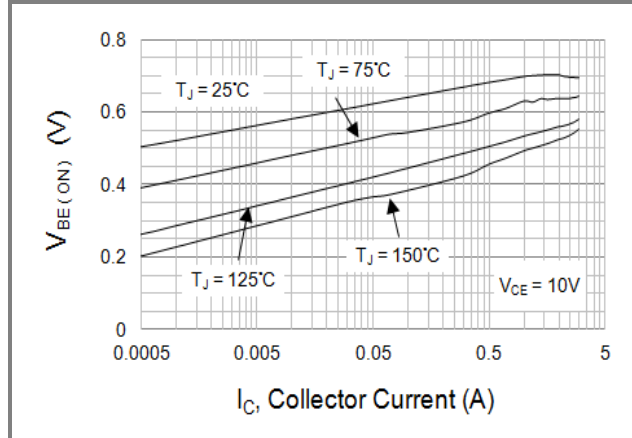


Fig.2 Typical Base-Emitter Turn-on Voltage

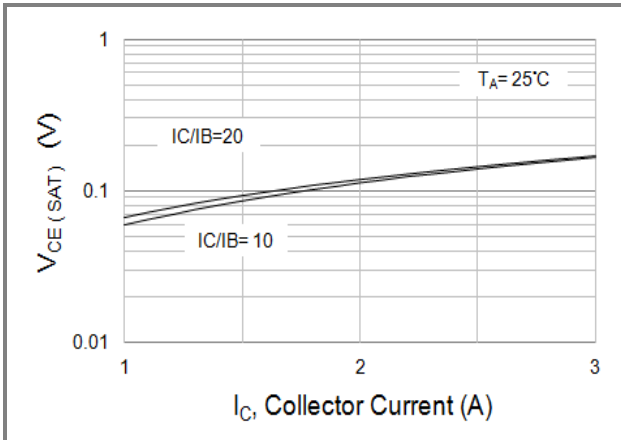


Fig.3 Typical Collector-Emitter Saturation

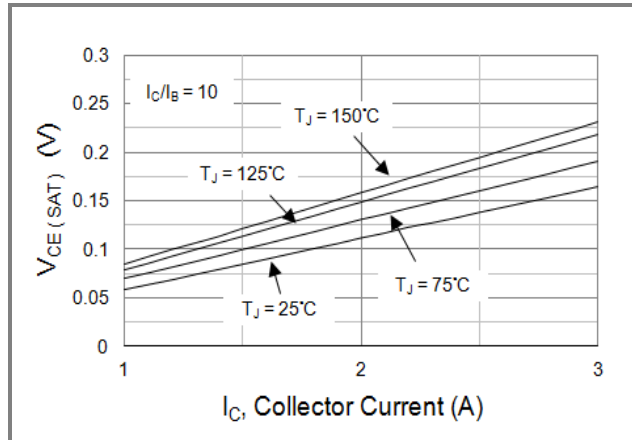


Fig.4 Typical Collector-Emitter Saturation

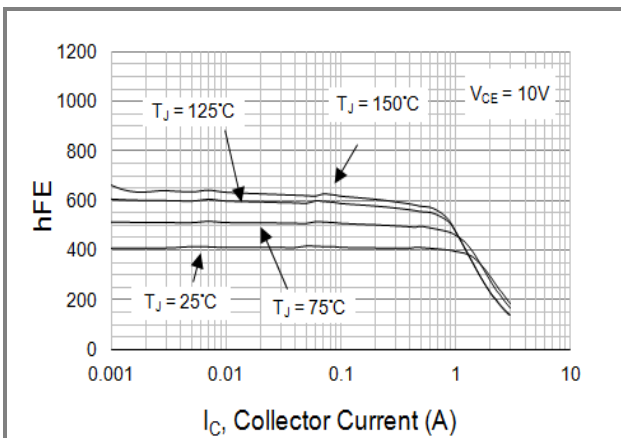


Fig.5 Typical DC Current Gain vs Collector Current

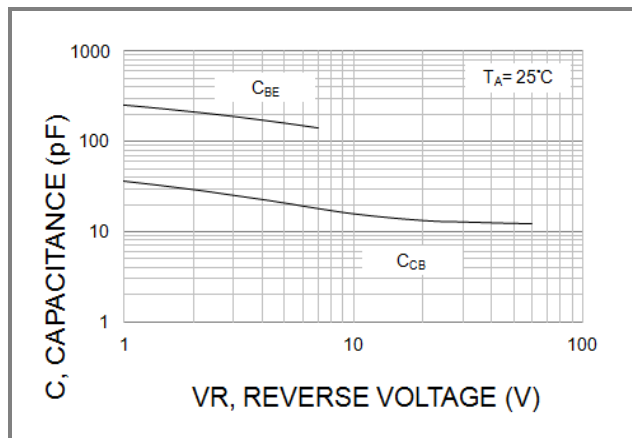


Fig.6 Typical Capacitance




# PBSS4350SA

## PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing Type	Marking	Version
PBSS4350SA_R1_00001	SC-59	3K pcs / 7" reel	C95	Halogen free

## MOUNTING PAD LAYOUT

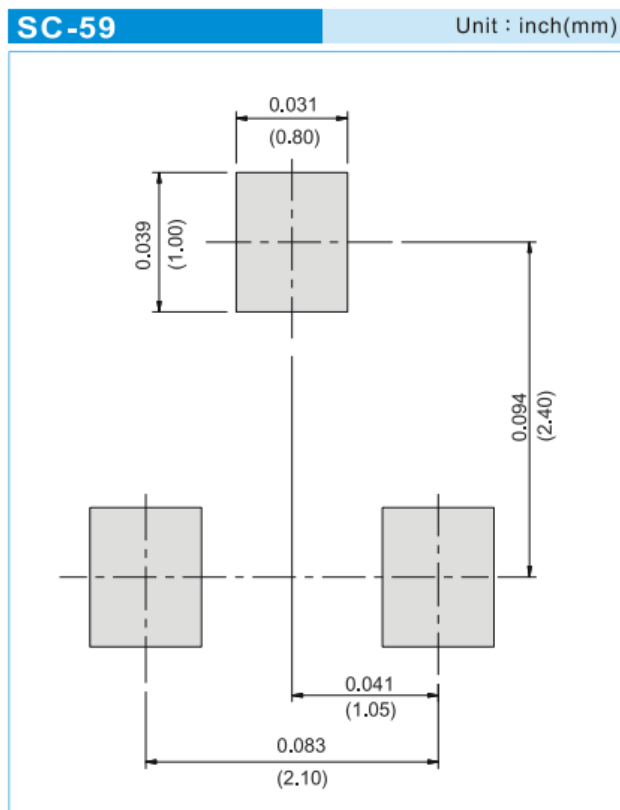



## PBSS4350SA

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.