


Customer Signature:

Customer Stamp:


Items	Content Revised	Date
1		
2		

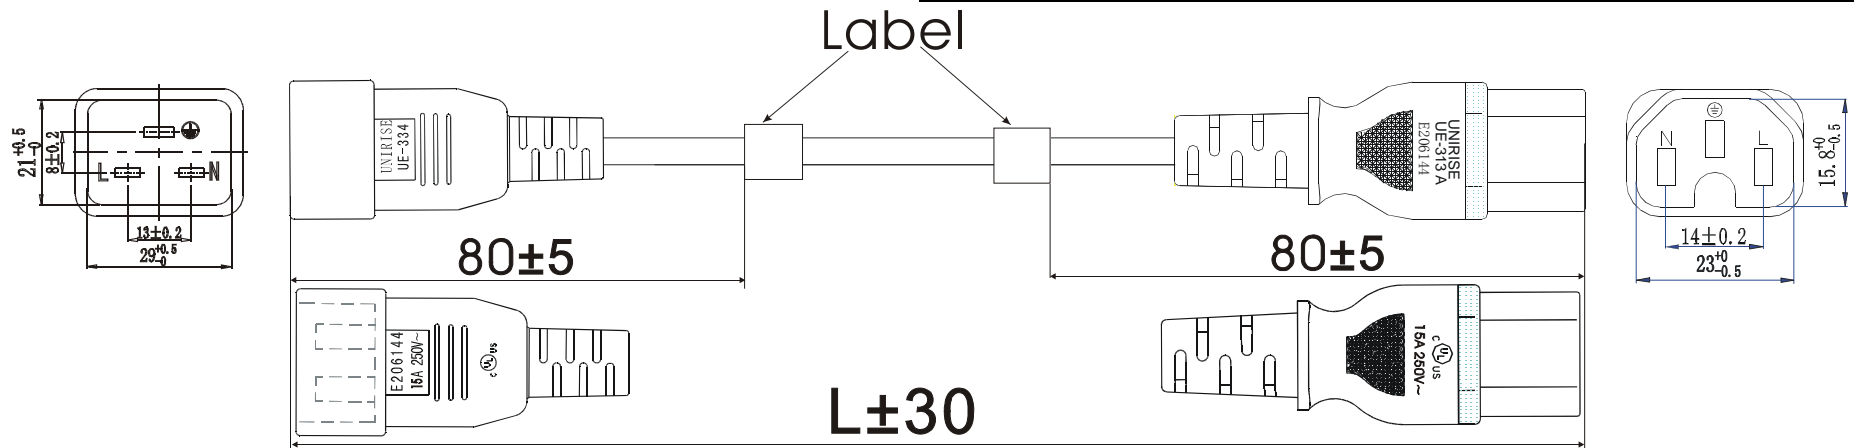

Technical requirements:

- 1.Plug: a. UE-334,Current(A):15,Voltage(V):250 Approved: UL
b. UE-313A ,Current(A):15, Voltage(V)250, Approved: UL
- 2.Cord: SJT #14/3C 105°C unrise press word Approved: UL
- 3.High Voltage Tested: 1500V/S No Attacked, No Flicker
- 4.No nick, Spot, Mottle Nn Appearance and Wording is Clearly
- 5.The All Material Compliance with RoHS and REACH

CORD MARKING:
E176096 (UL) SJT VW-1 105°C 300V 3x2.08mm² (14AWG) Or
C(UL) SJT FT1 105°C 300V 3x2.08mm² (14AWG) UNIRISE

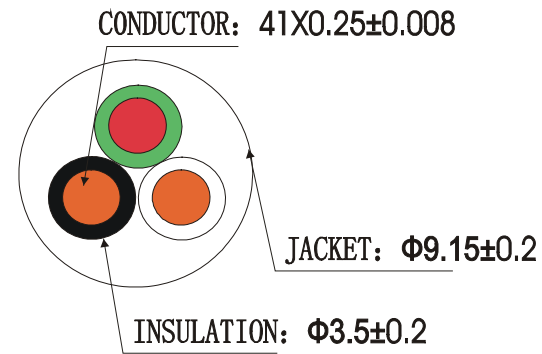

Items	Part Number	Description	Colour
1	DX334	Blade of UE-334 L/N	/
2	DX334-1	Blade of UE-334 E	/
3	---	Shell of UE-334	/
4	---	PVC of plug 60P UE-334	/
5	315313900	Blade of UE-313A	/
6	---	Shell of UE-313A	/
7	---	PVC of plug 60P UE-313A	/
8	CX91214322-2	SJT 3X14AWG 105°C	

Drawing No.	Type	Power Supply Cord UE-334+UE-313A			
Drawn by	Yanjiale 2021-11-15	Unit	mm	Sample Part NO.	PWCD-C15C20-15A-XXF-YYY
Checked by	songyu	Customer	CSA UNIRISE		
Approved by	Jason	Angle			

