

### WAU120-1000

#### Electrical Specifications (@25C)

1. Primary Rating: 120V 60Hz
2. Primary Excitation Current: <4mA
3. Secondary Rating: 12VAC ± 5%, 1000mA AC
4. Secondary No-Load Rating: <15.0VAC Ref.
5. No Load Power (stand by): ≤0.21W
6. Average Efficiency: 82.96%. Meets minimum level VI efficiency\*
7. Operating Temperature Range: -10 Deg C to +50 Deg C
8. Temperature Rise: 30 Deg C Max at rated load

#### Mechanical Parameters:

Case Type: Thermoplastic molded enclosure.  
Output Cord: 22 AWG, 6 Ft. Long Min.

Warranty: 10 Years

#### Agency File:


UL/CUL: File E341931, UL 1310

#### A. Dimensions:

H	W	D
79.6	59.7	48.1

\*Units: In Millimeter


#### B. Schematic:

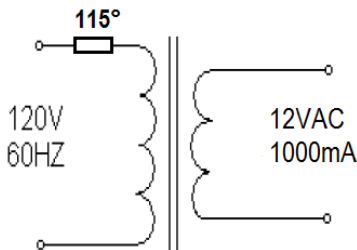

**DOE/CEC Compliance:** This power supply meets the minimum efficiency levels for direct operation as defined by DOE Docket Number EERE-2008-BT-STD-0005-0219.


**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.


\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

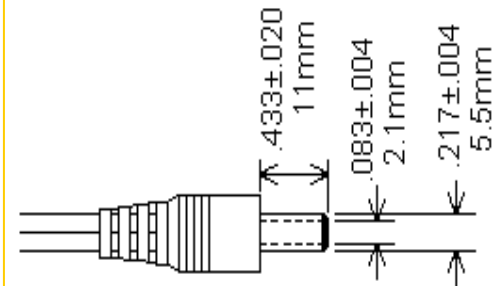

**TRIAD**

**CLASS 2 POWER SUPPLY**  
**MODEL: WAU120-1000**  
**INPUT: 120VAC 60Hz, 16W**  
**OUTPUT: 12VAC @ 1000mA**

  
 LISTED  
 EPBU  
 E341931

  
 RoHS  
 XXXX

**MADE IN CHINA**