


**XD350-3.5/XD381-3.81**  
PCB SCREW TERMINAL BLOCK



PCB terminal block  
 Rated current: 10 A  
 Rated voltage: 300 V  
 Wire range: 26-16 AWG  
 Pitch: 3.5 mm/3.81 mm  
 Mounting: Wave soldering

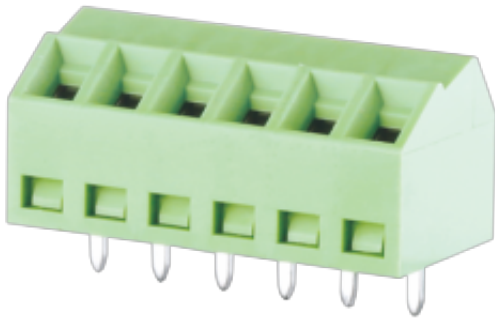

**UL/CUL**

Use Group	B	C	D
Rate Voltage [V]	300	-	300
Rated Current [A]	10	-	10
Wire Range [AWG]	26~16		
Dielectric Voltage-Withstand	1.6KV		

**IEC**

Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	160	200	400
Rated Current [A]	10	10	10
Impulse withstand voltage [KV]	2.5	2.5	2.5
Conductor cross section[solid/flexible] [mm <sup>2</sup> ]	0.2~1.5		

**Material**

**XD350-3.5/XD381-3.81**  
PCB SCREW TERMINAL BLOCK

Insulation Material	PA66
Flame retardant rating	UL94V-0
Conductor Material	Copper alloy
Plating of conductor surface	Sn plated

**Other Data**

Pitch/Poles [mm]/[P]	3.5 , 3.81/2~24
Stripping Length [mm]	5
Screw/Torque(Max)[N.m]	M2/0.2
Operating temperature [°C]	-40~+105
Soldering temperature	260°C/5S
Pin dimensions [mm]	0.5*0.8
PCB Hole Diameter [mm]	Ø1.1

**Dimensions**

**PCB opening diagram**

