




## Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 20M FEP CABLE

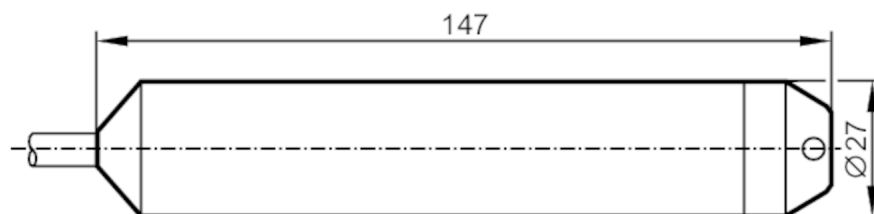

### Product characteristics

Number of inputs and outputs	Number of analogue outputs: 1			
Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...60 kPa

### Application

Design	with capillary tube for pressure compensation		
Application	for industrial applications		
Media	Liquids		
Medium temperature [°C]	-10...85		
Min. bursting pressure	4 bar	58 psi	400 kPa
Pressure rating	3 bar	43.5 psi	300 kPa
Type of pressure	relative pressure		

### Electrical data

Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes
Measuring principle	hydrostatic

### Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 1
------------------------------	-------------------------------

### Outputs

Total number of outputs	1
Output signal	analogue signal
Number of analogue outputs	1
Analogue current output [mA]	4...20
Max. load [Ω]	700; (U <sub>b</sub> = 24 V; (U <sub>b</sub> - 10 V) / 20 mA)
Short-circuit protection	yes

### Measuring/setting range

Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...60 kPa
-----------------	-------------	--------------	-------------	------------

### Accuracy / deviations

Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation [% of the span]	< 0,25 (BFSL) / 0,5; (incl. linearity, zero and span error (limit value setting))
Linearity deviation [% of the span]	< 0,2 (BFSL)
Long-term stability [% of the span]	< 0,2; (per year)



## Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 20M FEP CABLE

Temperature coefficient zero point [% of the span / 10 K]	< ± 0,2; (0...50 °C)
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (0...50 °C)

Operating conditions	
Ambient temperature [°C]	-10...85
Storage temperature [°C]	-30...80
Protection	IP 68


Tests / approvals	
MTTF [years]	403
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request

Mechanical data	
Weight [g]	1754
Materials	stainless steel (1.4571/316Ti ); PA

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 20 m, FEP, Ø 7.5 mm	

Connection	
------------	--

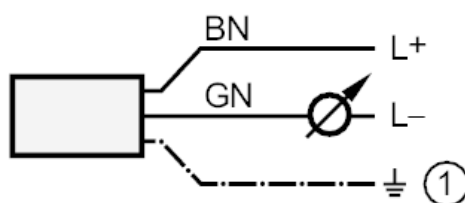

1: screen (connected to the housing)  
Core colours :  
BN = brown  
GN = green