

Single Output 350W/420W Medical & ITE Power Supplies


<https://product.tdk.com/en/power/cus-m>
<http://www.emea.lambda.tdk.com/cus350m>



With efficiencies up to 94%, the medical and ITE certified CUS350M is rated at 350W with convection cooling and up to 420W with airflow. The CUS350M is ideal for applications where audible noise cannot be tolerated, including hospital, dental, broadcast and professional audio equipment. A 5V 0.5A standby output, Power Good signal, 12V 0.3A fan supply and remote on/off are provided as standard on the /F suffix models.

Features	Benefits
• 350W Convection Cooled	• Quiet Operation
• Up to 420W with Forced Air	• Can Utilize System Airflow
• Medical Certifications (2 x MOPP)	• Suitable for B and BF Rated Equipment
• Class B Conducted EMI	• Easier System EMC Compliance
• 5V Standby Voltage, DC Good Signal, 12V Fan Supply and Remote On/Off	• Provides Flexibility in the System
• Compact 7.5 x 3.4 x 1.6" Size	• Space Saving in End Equipment

Model Selector								
Model	Voltage (V)	Adjustment Range (V)	Max Current (A) Convection	Max Power (W) Convection	Max Current (A) Forced Air	Max Power (W) Forced Air	Ripple Noise (mV)	Efficiency (typ)% 115/230Vac
CUS350M-12/F	12	11.4 - 12.6	29.0	348.0	34.5	414.0	120	91 / 93
CUS350M-18/F	18	17.1 - 18.9	19.4	349.2	23	414	180	91 / 94
CUS350M-24/F	24	22.8 - 25.2	14.7	352.8	17.5	420	240	91 / 94
CUS350M-36/F	36	34.2 - 37.8	9.7	349.2	11.5	414	240	91 / 94
CUS350M-48/F	48	45.6 - 50.4	7.3	350.4	8.7	417.6	480	91 / 94

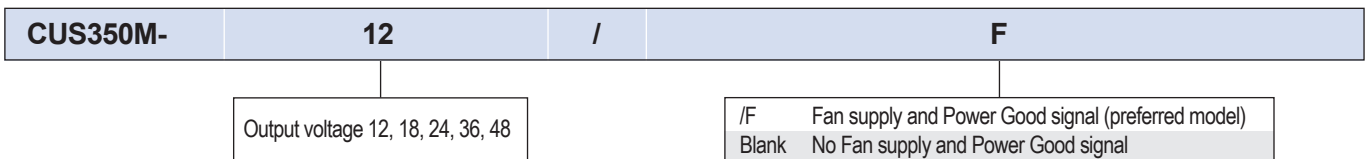

Specifications		
Model		CUS350M
Input		
Input Voltage Range (Operating)	Vac	85 - 265
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac)
Input Frequency	Hz	47 - 63 (Note: Safety certified for 50-60Hz only)
DC Input Voltage range	Vdc	120 - 370 (Note: Safety certified for AC input only)
Input Current (115/230Vac)	A	350W; 4/2, 420W; 4.5/2.3
Inrush Current at 230Vac (typ)	A	40 (Cold Start)
Leakage Current	mA	<0.3
Power Factor (115/230Vac)	-	0.99 / 0.95
Harmonic Compliance	-	Designed to meet IEC61000-3-2
Hold Up Time (typ) at 110/220Vac Input	ms	20 (350W output)
Efficiency	-	See model selector table
Conducted & Radiated EMI	-	EN55011/EN55032-B, FCC Class B, (radiated Class A) 350W output
Immunity	-	EN61000-4 and EN60601-1-2:2015 (Ed4). See immunity table
Insulation Class	-	Class I
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, IEC/EN60601-1, ANSI/AAMI ES60601-1, 60950-1, CE Mark and UKCA Mark

Immunity				
Test	Standard	Test Level	Criteria	Notes
ESD	EN61000-4-2	Air ±15kV and contact ±8kV	A	See IEC61000 immunity test report on website
Radiated Susceptibility	EN61000-4-3	80M -1GHz: 10V/m 1.4 - 2.0GHz: 3V/m 2.0 - 2.7GHz: 1V/m	A	
Electrical Fast Transient Burst	EN61000-4-4	±4kV	A	
Surge	EN61000-4-5	Normal ±2kV Common ±4kV	A	
Conducted Susceptibility	EN61000-4-6	10Vrms	A	
Magnetic Fields	EN61000-4-8	30A/m	A	
Voltage Dips	EN61000-4-11	30% 500ms	B	
		60% 10ms	B	
		100% 20ms	B	
		100% 5000ms	B	

Specifications		
Model		CUS350M
Output		
Output Voltage Adjustment	V	See model selector table
Switching Frequency	kHz	PFHC; 90 - 110, LLC; 50 - 180, Aux; 100
Line Regulation	%	0.5
Load Regulation	%	1
External Load Capacitance	uF	12V; 12,000, 18; 9,000, 24; 2,700, 48V; 270
Ripple & Noise	-	See model selector table
Temperature Coefficient	%/°C	0.02
Minimum Load	-	No minimum load required
Overcurrent Protection	%	12V: >38, 18V: > 26, 24V: > 20, 36V: >13, 48V: > 10
Overvoltage Protection(2)	-	12V: 13.8-16.2, 18V: 20.7-24.3, 24V: 27.6-32.4, 36V: 41.4-48.6, 48V: 55.2-64.8
Remote Sense	-	Yes
Remote On/Off	-	Apply voltage to isolated terminals to shut unit down
Power Good	-	Isolated transistor, On = Good. Gives >5ms warning of AC power loss
Standby Voltage	-	5V 0.5A
Fan Supply	-	12V 0.3A
Parallel Operation	-	-
Environmental		
Operating Temperature	°C	-20 to + 70 (See derating curves)
Humidity (non condensing)	%RH	10 - 95 (Operating and storage)
Storage Temperature	°C	-40 to + 85
Cooling	-	Convection or forced air (1.5m/s across terminals)
Altitude	m	62368-1: 5000, 60601-1: 4000 (operating)
Withstand Voltage (For 1 minute)	Vac	Input to Ground: 2,000, (1xMOPP), Input to Output: 4,000 (2xMOPP), Output to Ground: 1,500 (1xMOPP)
Isolation Resistance	MΩ	>100 at 25°C, 70%RH Output - Ground 500Vdc
Vibration (Non operating)	-	10-55Hz (Sweep for 1min.) 19.6m/s ² Constant X,Y,Z 1 hour each
Shock (Non operating)	-	Less than 196m/s ² , 11ms, ±X, ±Y, ±Z 3 times each
Other		
Weight (Typ)	g	850
Size (WxHxD)	mm	190 x 87 x 40
Size (WxHxD)	Inches	7.5 x 3.4 x 1.6
Connectors	-	Input and output: screw terminal block. Signals: JST connector
MTBF (JEITA RCR-9102B)(3)	Hours	108,909
Warranty	yrs	3

Notes


See website for detailed specifications, test methods and installation manual

(1) Derate linearly to 80% load from 115 to 85Vac input (convection); derate linearly to 90% load from 95 to 85Vac (forced air cooling)


(2) Cycle AC to reset

(3) Parts count method, Ground Fixed. Note the JEITA RCR-9102B calculation method produces figures significantly lower than Telcordia

Outline Drawing

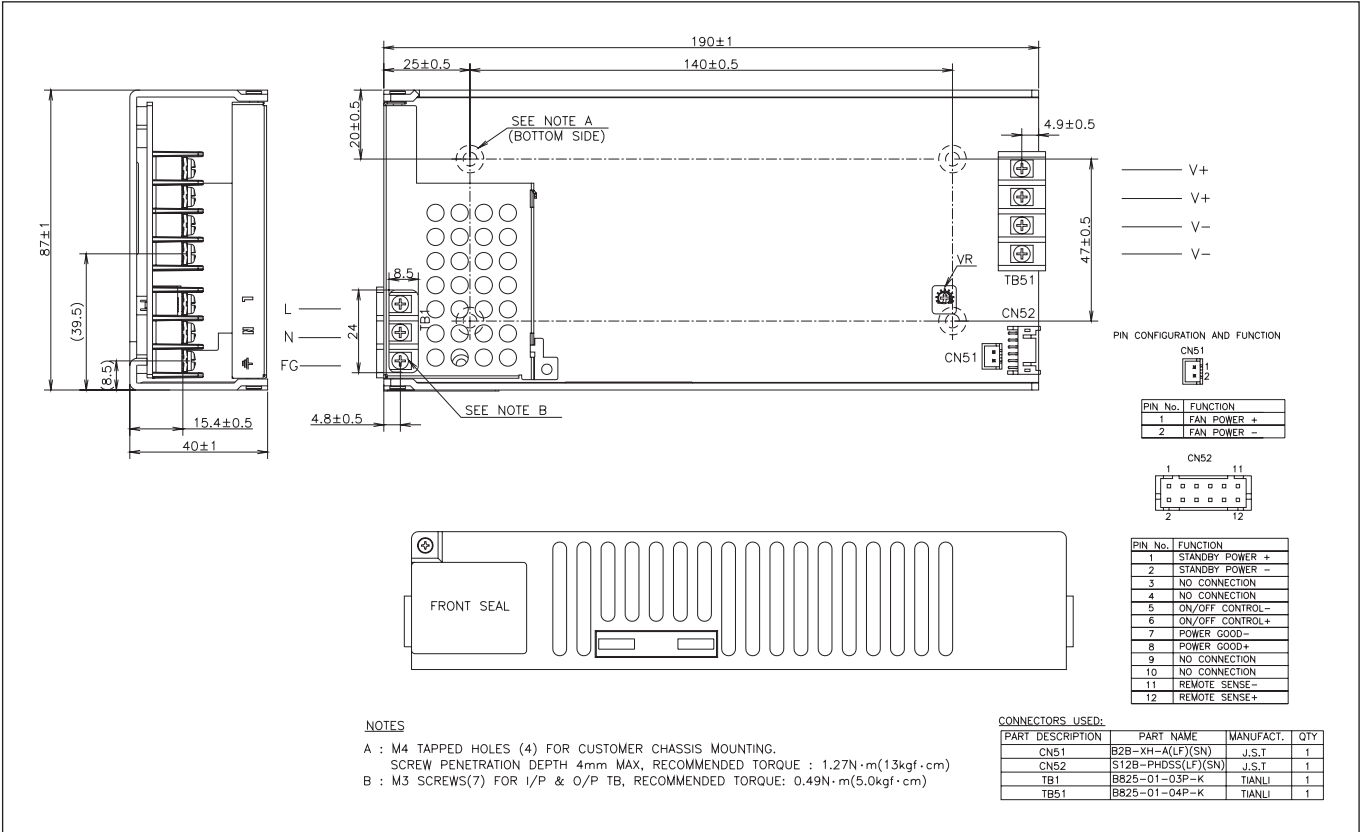

Derating Curve

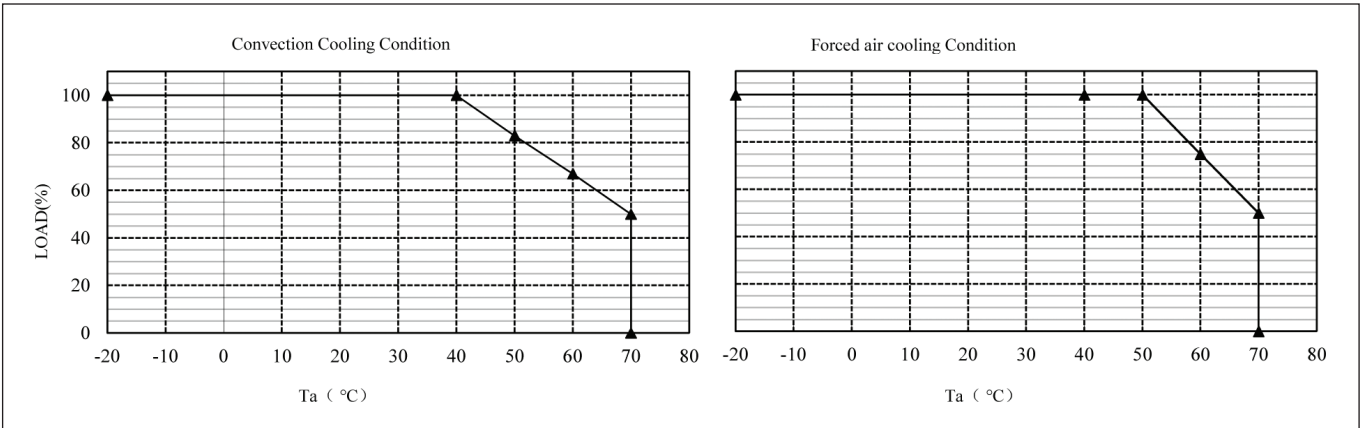



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
 ttf.fr.powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
 ttf.it.powersolutions@tdk.com
 www.emea.lambda.tdk.com/it



Netherlands

ttf.nl.powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
 tlg.at.powersolutions@tdk.com
 www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
 tlg.ch.powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
 tlg.dk.powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
 tli.powersolutions@tdk.com
 www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tia.powersolutions@tdk.com
 www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
 tfs.marketing@tdk.com
 www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com

