



MODEL NUMBER
ADT-2734-MM-3MM-02

NOTES:

1. MATERIALS & FINISH:
 - 1.1 HOUSING & NUTS: PASSIVATED STAINLESS STEEL
 - 1.2 SUPPORT BEAD: ULTEM 1000
 - 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
2. SPECIFICATIONS:
 - 2.1 FREQUENCY RANGE: DC to 26.5 GHz
 - 2.2 IMPEDANCE: 50 OHMS NOMINAL
 - 2.3 VSWR (MAX):
 - 2.3.1 DC TO 20 GHz: 1.10:1
 - 2.3.2 20 TO 26.5 GHz: 1.15:1
 - 2.4 OPERATING TEMP RANGE: -65°C to +125°C

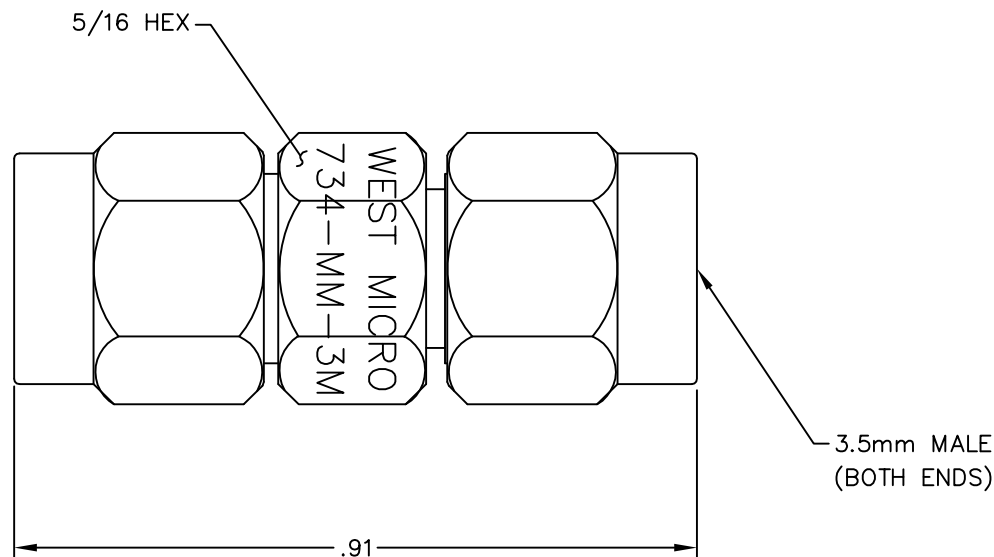

REV.	DESCRIPTION	DATE
I	RELEASED	3/20/96
A	ECR 3701	7/2/85
B	ECR 6545	7/31/89
C	REDRAW ON CAD	11/20/92
D	ECO 23382	3/14/11
E	ECO 57924	4/30/21

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.		CAGE CODE 34078		MIDWEST MICROWAVE	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. FLATNESS: T.I.R. CONCENTRICITY: T.I.R. ANGLES AND PERPENDICULARITY: ±1°				TITLE 3.5mm MALE TO MALE ADAPTER	
DRAWN/DATE A.BEATTY 11/20/92		ENG./DATE A.OSGA 11/20/92		DRAWING NUMBER ADT-2734-MM-3MM-02-01	
CHECKED/DATE M.HOLLMAN 11/20/92		APPROVED/DATE		REV. E	
SCALE: 3:1				SHEET 1 of 1	