


400G Singlemode 9/125 OS2 Switchable Fiber Optic Cable (12F MTP/MPO-APC to 4x Duplex LC/UPC F/M), LSZH, Yellow, 5 m (16.4 ft.)

MODEL NUMBER: N390X-05M-8L-AP

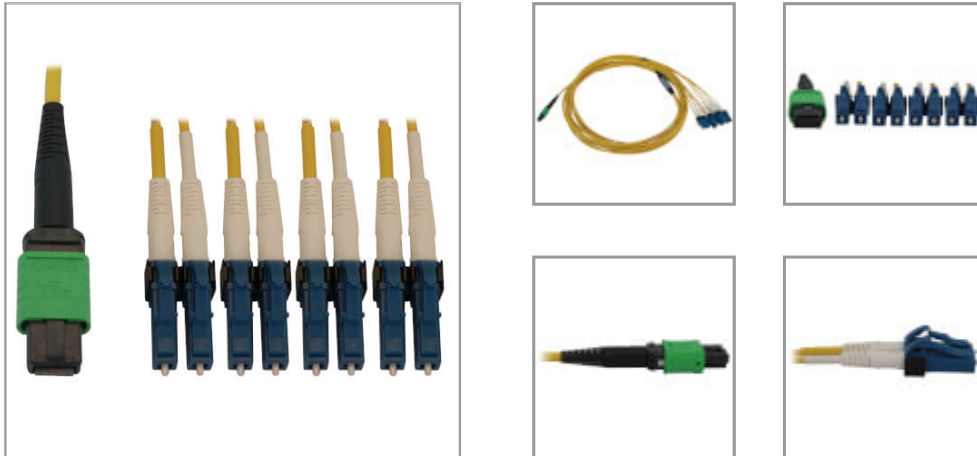

400 GbE Ethernet breakout cable supports high bandwidths necessary for enterprise applications in wiring closets, telecom rooms and data centers.

Features

40/100/400 GbE Cable Supports Higher Bandwidths for High-Density Data Networking

The N390X-05M-8L-AP is a premium multimode fiber optic cable that supports 400 Gb Ethernet speeds for transmitting data and voice signals over short distances. It is designed to support higher bandwidths for high-density patching between data center MDFs and IDFs in enterprise installations. This singlemode 9/125 OS2 cable is an ideal choice for 100 Gb Ethernet applications up to 100 meters (328 feet) at 1550 nm. The breakout cable also eliminates the need for long fan-out cables or long individual duplex cable runs.

Switchable Connectors Allow Easy Polarity Conversions

The switchable LC/UPC duplex ends let you easily switch the fiber polarity without tools or the need to re-terminate the connectors.

100% Tested for Low Insertion Loss and Back Reflection

The 12-fiber MTP/MPO APC connector with a green housing minimizes back reflection with low insertion loss. The connector's slim boot is designed for easy cable management.

Yellow Jacket Helps Avoid Misidentification That Can Cause Costly Downtime

The OS2-rated cable has a yellow jacket to identify it as singlemode in a crowded patch panel or switch and prevent it from becoming accidentally disconnected. The round low-smoke zero-halogen (LSZH) jacket limits the amount of toxic smoke emitted in case of combustion, making it suitable for poorly ventilated areas.

Highlights

- Switchable LC connectors allow polarity conversion without tools or re-termination
- MTP/MPO APC connector minimizes back reflection with low insertion loss
- Backward compatible with 10/25/40 Gb networks to facilitate future-proofing
- Yellow LSZH jacket allows fast, easy identification in a crowded switch or patch panel

Package Includes

N390X-05M-8L-AP 400G
Singlemode 9/125 OS2 Switchable
Fiber Optic Cable, Yellow, 5 m
(16.4 ft.)

Specifications

OVERVIEW

UPC Code

037332272409

| | |
|--------------------------------------|--------------------------------------|
| Technology | Singlemode |
| Optical Mode | OS2 |
| PHYSICAL | |
| Cable Jacket Color | Yellow |
| Connector Color | Blue; Green; Black |
| Cable Jacket Material | LSZH |
| Cable Jacket Rating | OFNR |
| Clad Diameter (microns) | 125.0 |
| Core Diameter (microns) | 9.0 |
| Primary Coating Diameter (microns) | 245.0 |
| Number of Fibers | 2 |
| Cable Length (ft.) | 16.4 |
| Cable Length (m) | 5.00 |
| Cable Length (in.) | 196.8 |
| Minimum Bend Radius | 20 mm (Dynamic); 10 mm (Static) |
| Fiber Cable Length | 5M (16.4 ft) |
| ENVIRONMENTAL | |
| Operating Temperature Range | 14° to 140°F (-10° to 60°C) |
| Storage Temperature Range | 14° to 140°F (-10° to 60°C) |
| Relative Humidity | 5% to 85% RH, Non-Condensing |
| COMMUNICATIONS | |
| Network Compatibility | 10 Gbps; 40 Gbps; 100 Gbps; 400 Gbps |
| Wavelength | 1310nm; 1550nm |
| Attenuation @ 1310NM | 0.40 dB/km |
| Attenuation @ 1550NM | 0.30 dB/km |
| Insertion Loss | 0.70 dB |
| CONNECTIONS | |
| Side A - Connector 1 | 12-STRAND MTP/MPO (FEMALE) |
| Side B - Connector 1 | (4) LC DUPLEX (MALE) |
| Endface Polish | APC; UPC |
| Switchable Polarity | Yes |
| FEATURES & SPECIFICATIONS | |

TRIPP-LITE

by **EAT•N**

1000 Eaton Boulevard
Cleveland, OH 44122
United States

| | |
|-------------------------------------|---------------------------|
| Push/Pull Tabs | Yes |
| Breakout | Yes |
| Optical Port | MPO/MTP |
| STANDARDS & COMPLIANCE | |
| Product Certifications | UL 1666 |
| Product Compliance | RoHS; CE (Europe); REACH |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

TRIPP-LITE

by **EAT•N**

© 2023 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.