

1-1534229-1 ✓ ACTIVE

AMP | MQS


TE Internal #: 1-1534229-1

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8 Position, .1 in [2.54 mm] Centerline, Sealable, Black, MQS

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING

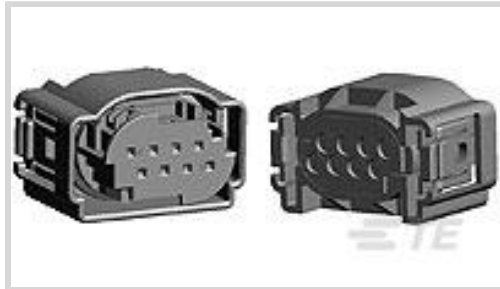

Connector System: **Wire-to-Board, Wire-to-Device, Wire-to-Wire**

Number of Positions: **8**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **2.54 mm [.1 in]**

Sealable: **Yes**

[All MQS, CONNECTOR HOUSING \(573\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	8
Number of Rows	2

Electrical Characteristics

Operating Voltage	50 VDC
Nominal Voltage Architecture	50 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black



Connector & Keying Code	A
-------------------------	---

Contact Features

Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.63 mm[.025 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Connector Height	24 mm[.945 in]
Product Width	20.7 mm[.815 in]
Product Length	31.6 mm[1.244 in]
Row-to-Row Spacing	6.9 mm[.272 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
Connector Position Assurance Capable	No



Product Compliance



[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 <p>TE Part # 1-967658-1 8pos MQS .63 header 90deg</p>	 <p>TE Part # CAT-M8793-T273 MQS, RECEPTACLE AND TAB</p>	 <p>TE Part # 7-962885-5 MQS0,63 Au rec LL EDS 0,2-0,35</p>	 <p>TE Part # 1452861-1 8 WAY MQS BLANKING COVER</p>
---	---	--	---



TE Part # 2321138-2
REC CONN CVR,8POS,MQS,180DEG




TE Part # 7-965906-5
MQS0,63 Au rec LL EDS 0,5-0,75

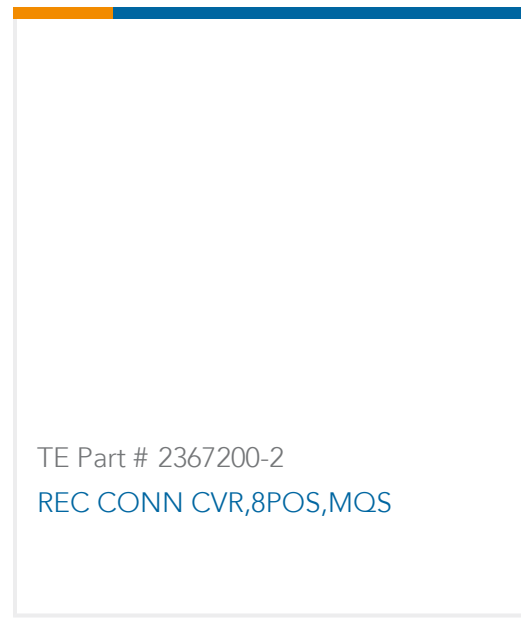

TE Part # 2367200-2
REC CONN CVR,8POS,MQS


Also in the Series | MQS

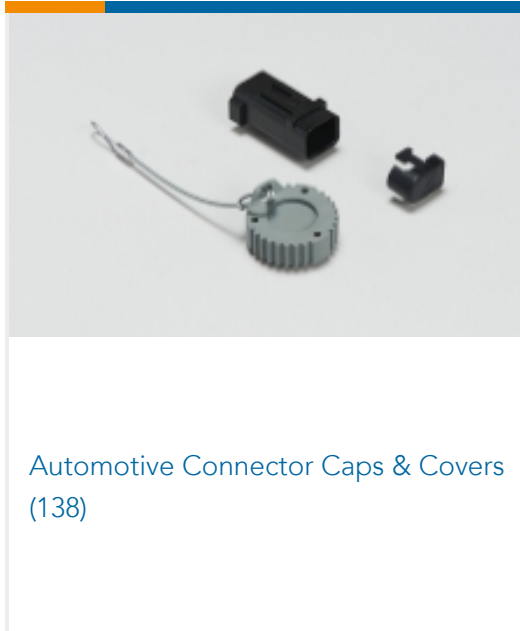


Automotive Connector Caps & Covers (138)




Automotive Connector EMC Shielding (3)

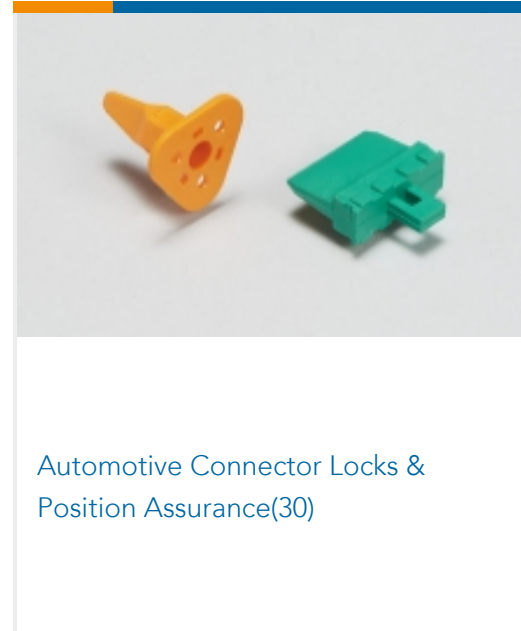


Automotive Connector Locks & Position Assurance(30)

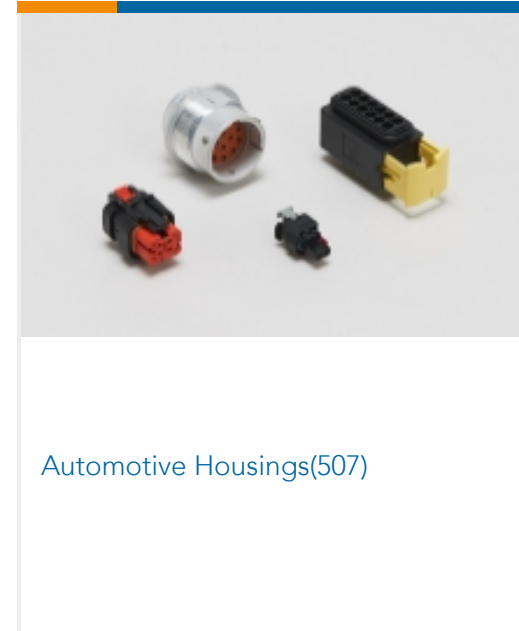


Automotive Housings(507)

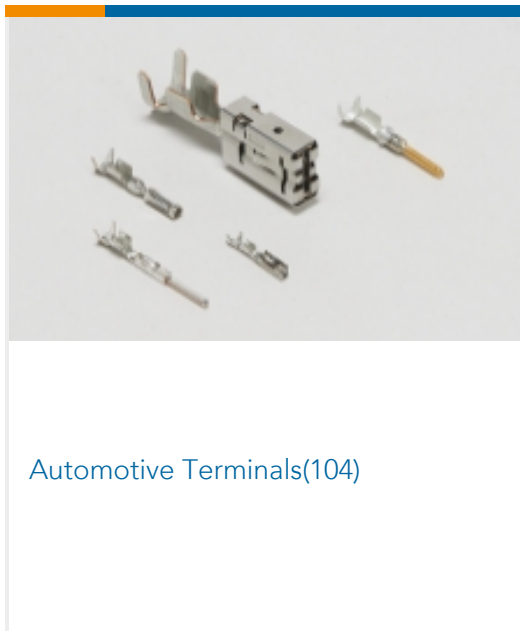


Automotive Terminals(104)

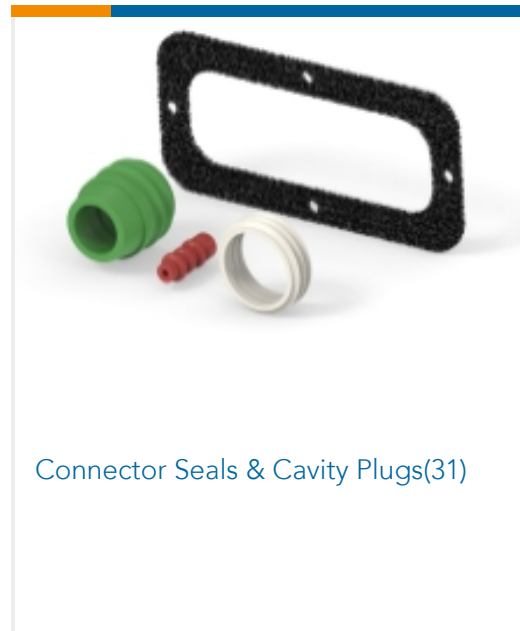

Connector Seals & Cavity Plugs(31)

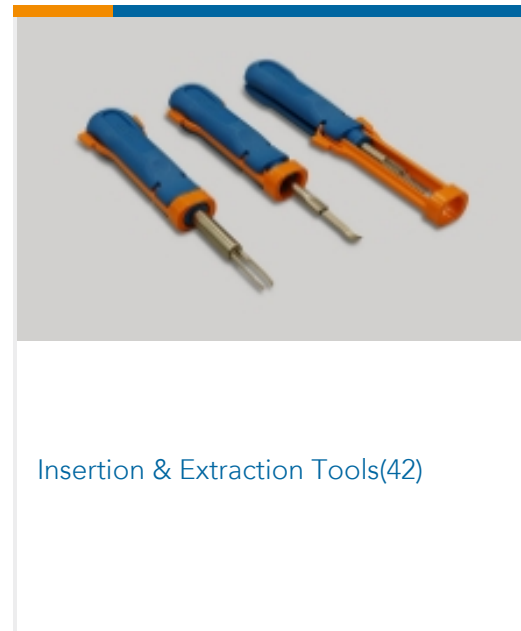

Insertion & Extraction Tools(42)

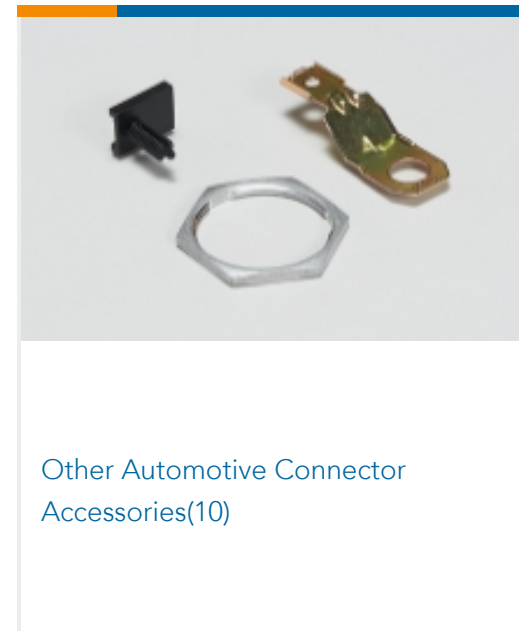


Other Automotive Connector Accessories(10)



PCB Headers & Receptacles(213)


Customers Also Bought

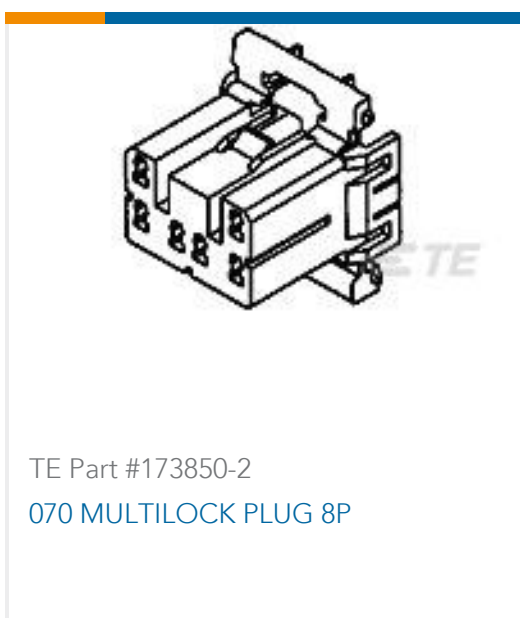

TE Part #173850-2
070 MULTILOCK PLUG 8P




TE Part #1456471-2
8p Hybrid 0.64/2.8 Unsealed Plug Assy

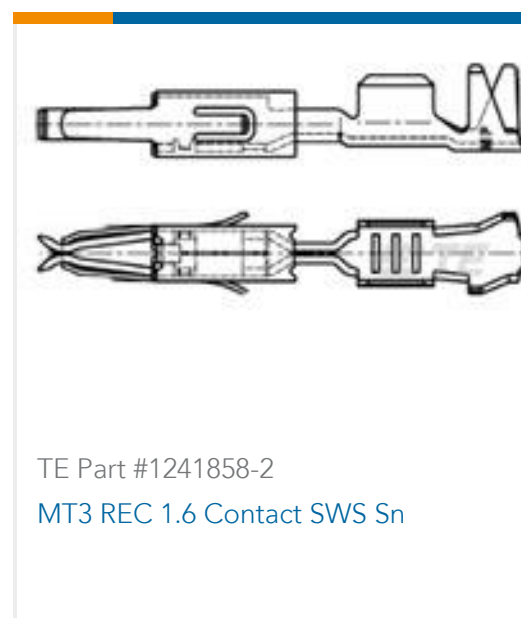

TE Part #1241858-2
MT3 REC 1.6 Contact SWS Sn



TE Part #2272431-2
1X6 GET UNSLD SIDE LATCH PLUG, KEY B

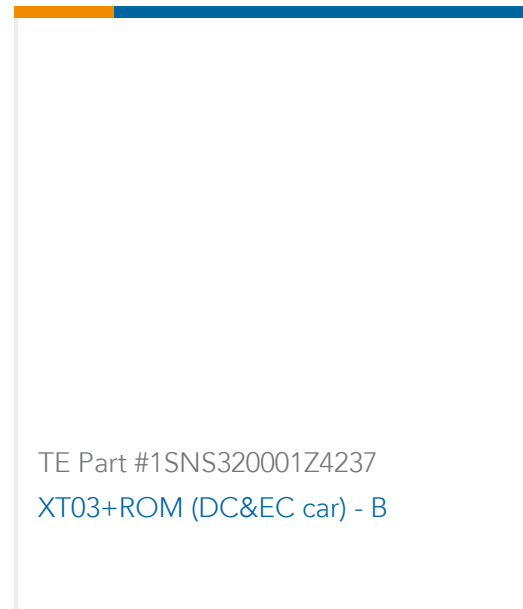

Documents

Product Drawings

8POS MQS REC COD A

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-1534229-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1534229-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1534229-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Micro Quadlok Interconnection System (MQS)

English

Product Specifications

Application Specification

English

Application Specification

English

1-1534229-1

Housing for Female Terminals, Wire-to-Board / Wire-to-Device / Wire-to-Wire, 8
Position, .1 in [2.54 mm] Centerline, Sealable, Black, MQS



SHROUDED CONNECTION, 8POS.

English