KUP-14D11-12 ✓ ACTIVE

Potter & Brumfield | Potter & Brumfield KUP

TE Internal #: 1393118-9

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1200 mW Coil Power Rating DC, 120 Ω Coil Resistance, Potter & Brumfield

KUP

View on TE.com >



Relays, Contactors & Switches > Relays > Power Relays



Power Relay Type: Industrial Panel Plug-In
Coil Magnetic System: Monostable, DC

Coil Power Rating DC: 1200 mW

Coil Resistance: 120Ω

Coil Special Features: UL Coil Insulation Class B

Features

Product Type Features

Power Relay Type	Industrial Panel Plug-In
Electrical Characteristics	
Insulation Initial Dielectric Between Coil & Contact Class	1500 – 2500 V
Insulation Initial Dielectric Between Contacts & Coil	2200 Vrms
Actuating System	DC
Insulation Initial Dielectric Between Open Contacts	1200 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Coil Power Rating Class	1000 – 1500 mW
Insulation Initial Dielectric Between Adjacent Contacts	2200 Vrms
Insulation Initial Resistance	100 ΜΩ
Contact Limiting Breaking Current	5 A
Coil Magnetic System	Monostable, DC
Coil Power Rating DC	1200 mW
Coil Resistance	120 Ω
Coil Special Features	UL Coil Insulation Class B
Coil Voltage Rating	12 VDC



Contact Switching Load (Min)	300mA @ 12V
Contact Voltage Rating	240 VAC
Body Features	
Product Weight	85 g[2.988 oz]
Contact Features	
Contact Arrangement	3 Form C (CO)
Contact Current Class	5 – 10 A, 16 A
Contact Current Rating (Max)	10 A
Contact Material	Ag
Contact Number of Poles	3
Relay Terminal Type	Quick Connect, Solder
Mechanical Attachment	
Relay Mounting Type	Socket
Relay Mounting Type Dimensions	Socket
	Socket 35 – 40 mm
Dimensions	
Dimensions Length Class (Mechanical)	35 – 40 mm
Dimensions Length Class (Mechanical) Height Class (Mechanical)	35 – 40 mm 40 – 50 mm
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical)	35 – 40 mm 40 – 50 mm 30 – 40 mm
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length Product Height	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length Product Height Usage Conditions	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in] 50 mm[1.97 in]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length Product Height Usage Conditions Environmental Ambient Temperature Class	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in] 50 mm[1.97 in]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length Product Height Usage Conditions Environmental Ambient Temperature Class Environmental Ambient Temperature (Max)	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in] 50 mm[1.97 in] 50 – 70 °C 70 °C[158 °F]
Dimensions Length Class (Mechanical) Height Class (Mechanical) Width Class (Mechanical) Product Width Product Length Product Height Usage Conditions Environmental Ambient Temperature Class Environmental Ambient Temperature (Max) Operating Temperature Range	35 – 40 mm 40 – 50 mm 30 – 40 mm 35.7 mm[1.405 in] 38.9 mm[1.55 in] 50 mm[1.97 in] 50 – 70 °C 70 °C[158 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUNE 2023

(235)

Candidate List Declared Against: JUNE

2022 (224)

Does not contain REACH SVHC

Halogen Content Not Yet Reviewed for halogen content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts












Also in the Series | Potter & Brumfield KUP



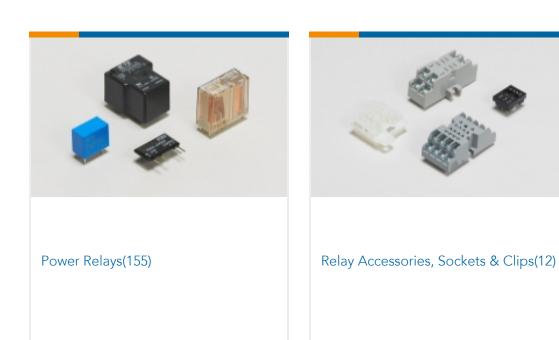

Customers Also Bought















Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393118-9_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1393118-9_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393118-9_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages

KUP Series Panel Plug-in Relay

English

Power Relays, Industrial Panel Plug-In, Monostable, DC, 1200 mW Coil Power Rating DC, 120 Ω Coil Resistance, Potter & Brumfield KUP



Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English