154N-500G-RT - ACTIVE

MEAS | MEAS 154 Series TE Internal #: 154N-500G-RT TE Internal Description: 500 PSIG RIBBON CABLE TUBE PRESS SENSOR 19MM MV OUTPUT PRESSURE SENSOR

View on TE.com >



Sensors > Pressure Sensors > Media Isolated Pressure Sensors > 19MM MV OUTPUT PRESSURE SENSOR



Pressure: [500 psi]

Media Isolated Pressure Sensor Type: Media Isolated mV Output Pressure Sensors

Media Isolated Pressure Sensor Style: Gauge

Output/Span: 100mV

Operating Temperature Range: -40 – 125 °C [-40 – 257 °F]

All 19MM MV OUTPUT PRESSURE SENSOR (49)

Features

Product Type Features

Media Isolated Pressure Sensor Type

Media Isolated Pressure Sensor Style	Gauge
Configuration Features	
Electrical Connection	Ribbon Cable
Electrical Characteristics	
Supply Current	1.5 mA
Dimensions	
Dimensions	Dia 18.97 x 13.8 mm[Dia .746 x .54 in]
Usage Conditions	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
Operation/Application	
Proof Pressure Range	3X
	500 psi
Output/Span	100mV
Packaging Features	

C For support call+1 800 522 6752



Media Isolated Pressure Sensor Package	O-Ring Mount
Other	
Non-Linearity	± .1 %
Sensor Options	Vent Tube
Product Compliance	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Methanone, (diphenylphosphinyl)(2,4,6- trimethylphenyl)- (1% in Component a) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

500 PSIG RIBBON CABLE TUBE PRESS SENSOR






Also in the Series | MEAS 154 Series

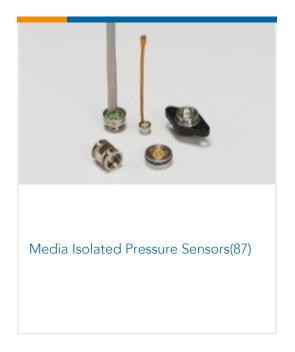

Customers Also Bought

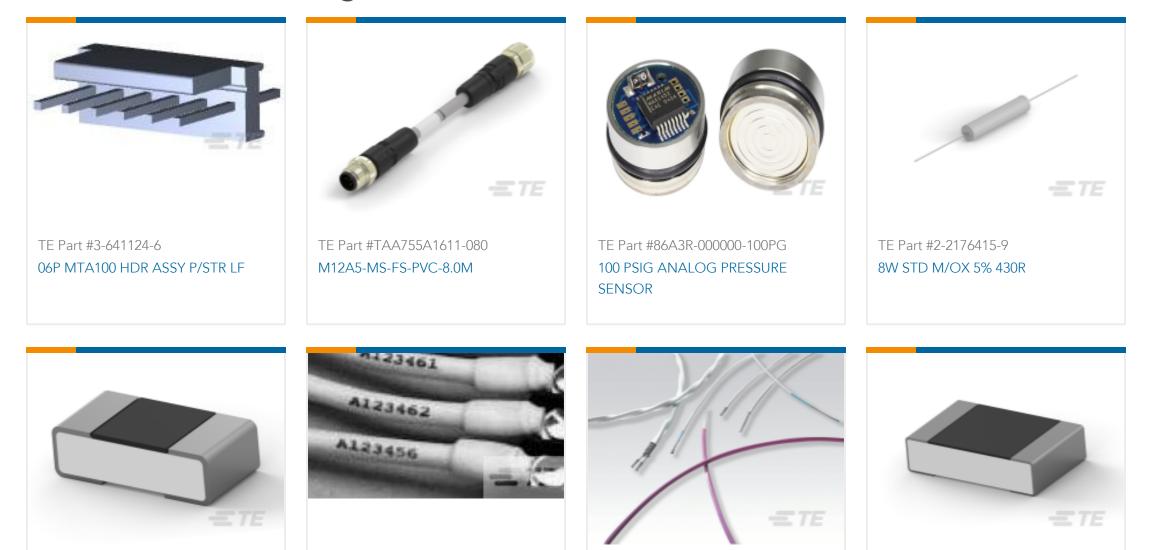

TE Part #2-2176364-3 RQ 0402 7K87 0.1% 10PPM 5K RL TE Part #5054034004 RNF-100-3/32-3-SP TE Part #CQ68943001 55A1161-20-0/0/0/2/2/2-9 TE Part #4-2176374-5 RQ 0805 309R 0.1% 10PPM 1K RL



154N-500G-RT

500 PSIG RIBBON CABLE TUBE PRESS SENSOR



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_154N-500G-RT_F1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_154N-500G-RT_F1.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_154N-500G-RT_F1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 154NC

English