FC-335-SY4 V ACTIVE

CII | CII FC-335 TE Internal #: 1617807-4 Mid-Range Relays, 3 Form X, 3PST-NO-DM, Coil Suppression Diode, Tin-Lead Terminal Plating, 35 A, 28 VDC Coil Voltage, CII FC-335

View on TE.com >

Relays, Contactors & Switches > Relays > Mil-Aero Relays > Mid-Range Relays



Mid-Range Relay Contact Arrangement: **3 Form X, 3PST-NO-DM**

Coil Suppression Diode: With

Auxiliary Contacts: Without

Terminal Plating: Tin-Lead

Mid-Range Relay Contact Current Rating: 35 A

Features

Product Type Features

Enclosure Type	Hermetically Sealed
Terminal Configuration	Screw
Product Type	Relay
Relay Туре	Military/Aerospace Mid-Range
Electrical Characteristics	
Vibration	10G's, 5 – 1000Hz
Shock	50G's, 11ms
Coil Suppression Diode	With
Mid-Range Relay Coil Voltage Rating	28 VDC
Mid-Range Relay Coil Resistance	160 Ω
Mid-Range Relay Contact Switching (Max)	115/200Vac (50-400Hz)
Back EMF Suppression	With
Coil Magnetic System	Non-Polarized, Monostable
Actuating System	DC
Contact Features	
Mid-Range Relay Contact Arrangement	3 Form X, 3PST-NO-DM
Auxiliary Contacts	Without



C For support call+1 800 522 6752

09/20/2023 11:20PM | Page 1

FC-335-SY4

Mid-Range Relays, 3 Form X, 3PST-NO-DM, Coil Suppression Diode, Tin-Lead Terminal Plating, 35 A, 28 VDC Coil Voltage, CII FC-335



Terminal Plating	Tin-Lead
Mid-Range Relay Contact Current Rating	35 A
Contact Base Material	Silver Cadmium Oxide
Mechanical Attachment	
Mid-Range Relay Mounting Type	Raised Vertical Flange Mount
Usage Conditions	
Operating Temperature Range	-70 – 125 °C
Operating Temperature Range Product Compliance For compliance documentation, visit the product page on TE.com>	-70 - 125 °C
Product Compliance	-70 – 125 °C Not Compliant
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant

SVHC > Threshold:

Not Yet Reviewed

Halogen Content

Solder Process Capability

Not Yet Reviewed for halogen content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

FC-335-SY4

Mid-Range Relays, 3 Form X, 3PST-NO-DM, Coil Suppression Diode, Tin-Lead Terminal Plating, 35 A, 28 VDC Coil Voltage, CII FC-335








Also in the Series CII FC-335



Customers Also Bought

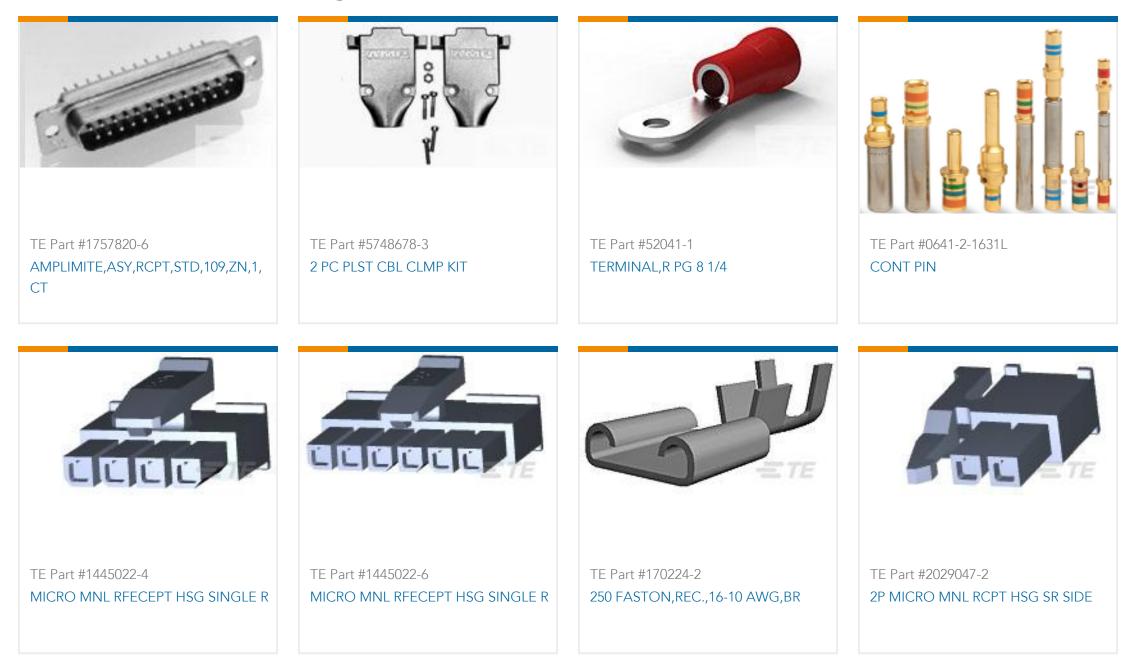

FC-335-SY4

Mid-Range Relays, 3 Form X, 3PST-NO-DM, Coil Suppression Diode, Tin-Lead Terminal Plating, 35 A, 28 VDC Coil Voltage, CII FC-335





Documents

Product Drawings FC-335-SY4=RELAY, 3PST

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1617807-4_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1617807-4_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1617807-4_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages CII FC-335 Series Relay

English