

CGS | CGS SBC TE Internal #: 1623727-2 22 Ω, Wire Wound, Power Resistor, 5 %, 25 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 7 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC

View on TE.com >



Passive Components > Resistors > Through-Hole Resistors > Wirewound Resistor: Axial Mount, 17 Watt



Resistor Type: **Power Resistor** Passive Component Dimensions: **25 x 10 x 9 mm**

Number of Terminations: 2

Packaging Method: Loose Piece - Box

Passive Component Tolerance: 5%

All Wirewound Resistor: Axial Mount, 17 Watt (40)

Features

Product Type Features

Product Type

Resistor Type

Fixed Resistor

Power Resistor

Element Type	Wire Wound
Configuration Features	
Number of Resistors	1
Electrical Characteristics	
Passive Component Tolerance	5 %
Resistance Class	Up to 1kΩ
Resistance Value	22 Ω
Power Rating	7 W
Body Features	
Passive Component Lead Type	Axial-Leaded
Termination Features	
Number of Terminations	2
Passive Component Termination Material Type	Tinned Copper Leads
Dimensions	

SBCH722RJ

22 Ω , Wire Wound, Power Resistor, 5 %, 25 x 10 x 9 mm, 2 Termination, Loose Piece - Box, 7 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC



Passive Component Dimensions	25 x 10 x 9 mm		
Usage Conditions			
Operating Temperature Range	-55 – 350 °C		
Temperature Coefficient	±200 ppm/°C		
Packaging Features			
Packaging Method	Loose Piece - Box		
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant		
EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC		
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free		

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


SBCH722RJ

22 Ω, Wire Wound, Power Resistor, 5 %, 25 x 10 x 9 mm, 2 Termination, Loose Piece -Box, 7 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC







Also in the Series | CGS SBC

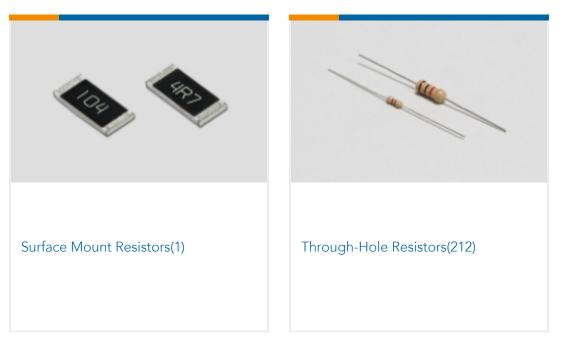



Customers Also Bought

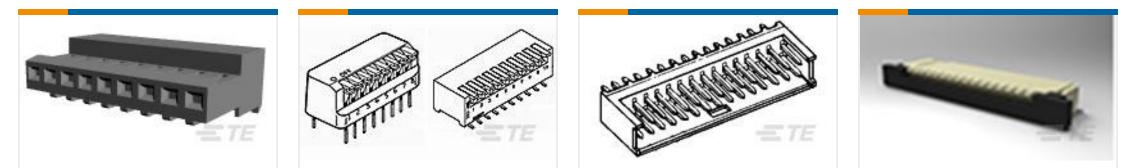

TE Part #3-640441-9	TE Part #2-5435802-0	TE Part #280385-2	TE Part #1-84953-0	
09P MTA100 CONN ASSY WHT	RIGHT ANGLE DIP SW 10 P SEALED	2X8P AMPMODU II SHRD HDR,ST,0.38 AU	1MM FPC HORZ.TOP CONT.ASSY 10P	

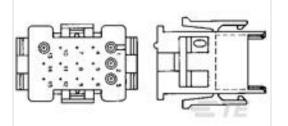



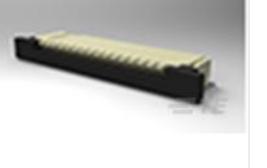



TE Part #1-640516-0	
36P MR II CAP HSG V0	

TE Part #282845-2 TERM-BLOK,PCB MNT,90DG,2P,7.62

TE Part #84953-8 1MM FPC HORZ.TOP CONT.ASSY 8P

TE Part #66400-1 III+ PIN,24-20,TIN-LEAD,LP



TE Part #2-1437665-0 JC6-P108-02=JC6 ASSEMBLY

SBCH722RJ

22 Ω, Wire Wound, Power Resistor, 5 %, 25 x 10 x 9 mm, 2 Termination, Loose Piece -Box, 7 W, ±200 ppm/°C, Tinned Copper Leads Termination, CGS SBC



Documents

Product Drawings SBCH 7 22R 5%

English

Datasheets & Catalog Pages 4-1773460-6_RESISTIVE_SOLUTIONS_RAIL

English

1309350_PASSIVE_COMPONENT

English

High Power Resistor - Type SBC (Square Ceramic) Series - Tyco Electronics Passives

English

8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS

English