

2-1437285-2 ✓ ACTIVE

AMP | SUPERSEAL 1.0mm

TE Internal #: 2-1437285-2

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 26  
Position, .118 in [3 mm] Centerline, Sealable, Black, SUPERSEAL 1.0  
mm

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > SUPERSEAL Connector Housings: 1.0 mm



Connector System: **Wire-to-Board, Wire-to-Device**

Number of Positions: **26**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **3 mm [.118 in]**

Sealable: **Yes**

[All SUPERSEAL Connector Housings: 1.0 mm \(10\)](#)

## Features

### Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	Integrated in Housing

### Configuration Features

Number of Positions	26
Number of Rows	4

### Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V



### Body Features

Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	1

### Contact Features

Contact Type	Socket
Mating Pin Diameter	1 mm[.039 in]

### Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

### Housing Features

Housing Material	PBT GF
Centerline (Pitch)	3 mm[.118 in]

### Dimensions

Connector Height	38 mm[1.496 in]
Product Width	32.2 mm[1.268 in]
Product Length	32.15 mm[1.266 in]
Row-to-Row Spacing	2.54 mm[.1 in]

### Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

### Industry Standards

Degree of Protection	JIS D0203
UL Flammability Rating	UL 94V-2

### Packaging Features

Packaging Quantity	500
Packaging Method	Box



Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

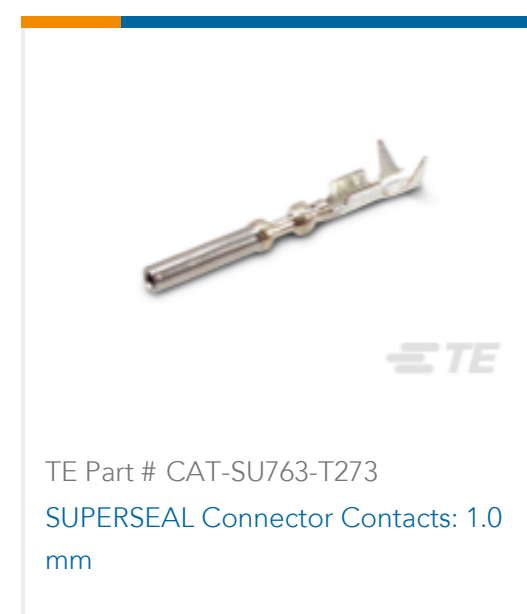

Also in the Series | **SUPERSEAL 1.0mm**

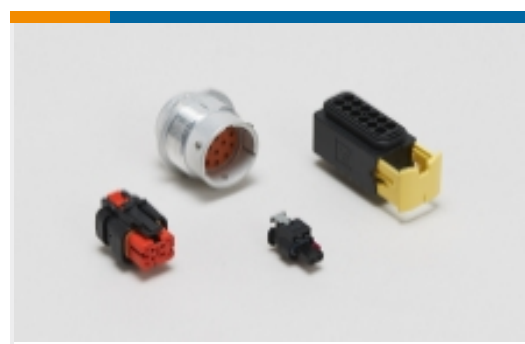


Automotive Housings(12)

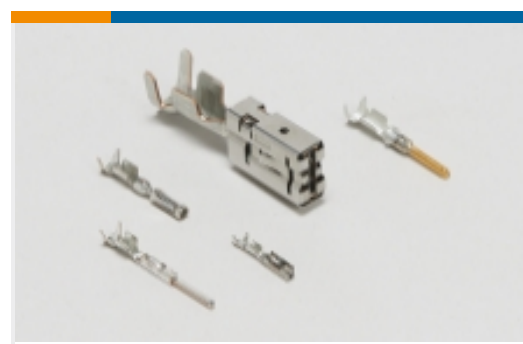

Automotive Terminals(6)



Connector Seals & Cavity Plugs(1)

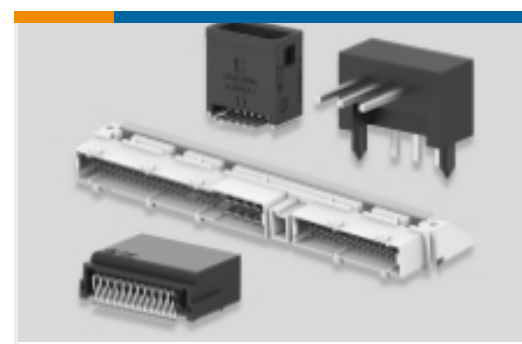

PCB Headers & Receptacles(30)

## Customers Also Bought



TE Part #2-1437285-3  
34POS,SUPERSEAL,REC HSG ASSY,  
SLD,COD 1



TE Part #2-368050-1  
ECONOSEAL, CONNECTOR  
HOUSING



TE Part #2050036-1  
64P ECU PLUG CONNECTOR



TE Part #2040114-1  
0.50/1.0/2.8 SEALED WIRE COVER  
114POS



TE Part #2040115-1  
0.50/1.0/2.8 SEALED PLUG ASSY  
72POS




TE Part #2040116-1  
0.50/1.0/2.8 SEALED WIRE COVER  
ASSY 72P



TE Part #2303790-1  
PLUG ASSEMBLY 114POS



TE Part #5-1743109-3  
AIR BAG 50P COVER ASSY S-GRN/RX

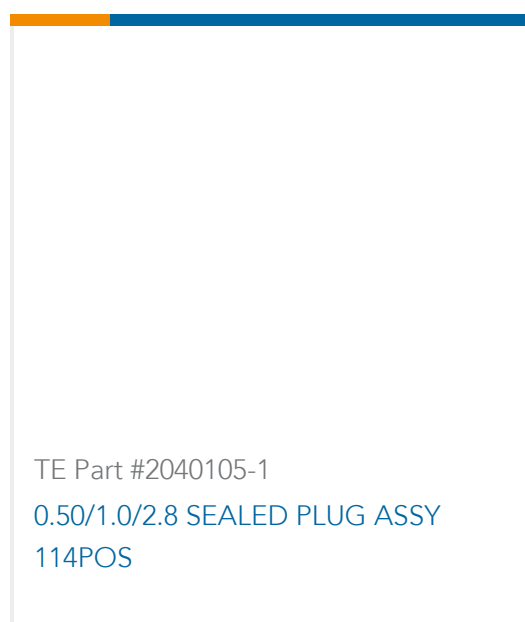

TE Part #2040105-1  
0.50/1.0/2.8 SEALED PLUG ASSY  
114POS

## Documents

### Product Drawings

26POS,SUPERSEAL,REC HSG ASSY,SLD,COD 1

English

### CAD Files

3D PDF

3D

### Customer View Model

ENG\_CVM\_CVM\_2-1437285-2\_O.2d\_dxf.zip



English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_2-1437285-2\\_O.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_2-1437285-2\\_O.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

---

**Product Specifications**

[Receptacle Contact, Super Seal Connector](#)

Japanese

[Application Specification](#)

Japanese

[Super Seal Connector](#)

Japanese

[Application Specification](#)

Japanese

---

**Instruction Sheets**

[Instruction Sheet \(non U.S.\)](#)

English

[SUPER SEAL CONNECTOR PLUG HOUSING CONNECTOR](#)

English

---

**Agency Approvals**

[UL Report](#)

English