

### **RAYCHEM RVS**

TE Internal #: 2-2013311-1 SO DIMM Sockets, Double Data Rate (DDR) 3, Stack Height .362 in [9.2 mm], Right Angle Module Orientation, 204 Position, RAYCHEM RVS

### View on TE.com >

Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets



DRAM Type: Double Data Rate (DDR) 3

Stack Height: 9.2 mm [.362 in ]

Module Orientation: Right Angle

Connector System: Cable-to-Board

Number of Positions: 204

## Features

**TE** 

## Product Type Features

DRAM Type	Double Data Rate (DDR) 3
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Bays	2
Number of Keys	1
Number of Rows	2
Module Orientation	Right Angle
Number of Positions	204
Electrical Characteristics	
DRAM Voltage	1.5 V
Signal Characteristics	
SGRAM Voltage	1.5 V

SO DIMM Sockets, Double Data Rate (DDR) 3, Stack Height .362 in [9.2 mm], Right Angle Module Orientation, 204 Position, RAYCHEM RVS



# **Body Features**

Ejector Location	Both Ends
Latch Material	Stainless Steel
Latch Plating Material	Tin
Module Key Type	SGRAM
Ejector Type	Locking
Connector Profile	Reverse
Contact Features	
Memory Socket Type	Memory Card
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold Flash
Contact Current Rating (Max)	.5 A
Termination Features	
Insertion Style	Cam-In
Mechanical Attachment	
Mating Alignment Type	Reverse Keying
PCB Mounting Style	Surface Mount
PCB Mount Retention	With
PCB Mount Retention Type	Solder Peg
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	High Temperature Thermoplastic
Housing Color	Black
Centerline (Pitch)	.6 mm[.024 in]
Dimensions	
Stack Height	9.2 mm[.362 in]
Row-to-Row Spacing	8.2 mm[.322 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Circuit Application	Power
	00/27/2023 03

SO DIMM Sockets, Double Data Rate (DDR) 3, Stack Height .362 in [9.2 mm], Right Angle Module Orientation, 204 Position, RAYCHEM RVS



### Industry Standards

UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	150
Packaging Method	Emboss on Reel
Other	
Socket Connector Comment	With floating peg.
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	
	Compliant
EU ELV Directive 2000/53/EC	Compliant Compliant
EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant Compliant No Restricted Materials Above Threshold

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per

homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

SO DIMM Sockets, Double Data Rate (DDR) 3, Stack Height .362 in [9.2 mm], Right Angle Module Orientation, 204 Position, RAYCHEM RVS






# Also in the Series | RAYCHEM RVS



# Customers Also Bought

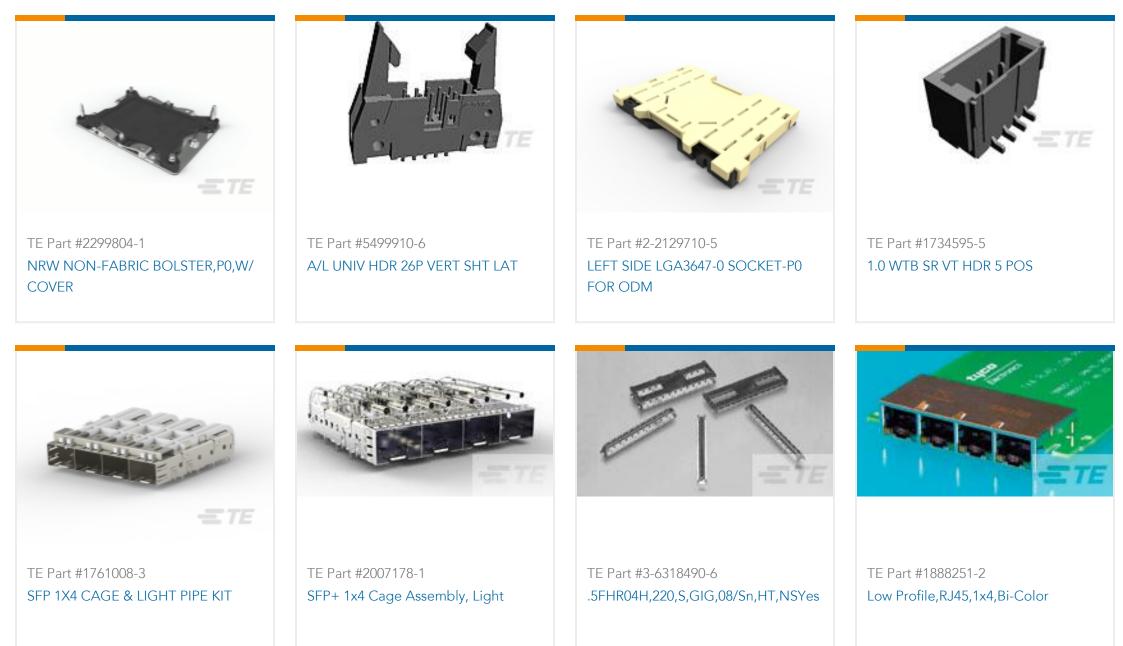



SO DIMM Sockets, Double Data Rate (DDR) 3, Stack Height .362 in [9.2 mm], Right Angle Module Orientation, 204 Position, RAYCHEM RVS



# Documents

CAD Files Customer View Model ENG\_CVM\_CVM\_2-2013311-1\_C.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-2013311-1\_C.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_2-2013311-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification

English