2825261-8 - ACTIVE

TE Internal #: 2825261-8 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0 View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 8

Centerline (Pitch): 4.2 mm [.165 in]

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	8
PCB Mount Orientation	Vertical
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Layout	Inline

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	13 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.032 µm[80 µin]
Termination Features	
Termination Post & Tail Length	3.5 mm[.138 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Method to Printed Circuit Board Mechanical Attachment	Through Hole - Solder
	Through Hole - Solder Keyed
Mechanical Attachment	
Mechanical Attachment Mating Alignment Type	Keyed
Mechanical Attachment Mating Alignment Type Mating Retention	Keyed With
Mechanical Attachment Mating Alignment Type Mating Retention Mating Alignment	Keyed With With
Mechanical Attachment Mating Alignment Type Mating Retention Mating Alignment PCB Mount Alignment	Keyed With With With

Mating Retention Type

Latch

White

Nylon GF

12.8 mm[.504 in]

1.6 mm[.063 in]

9.8 mm[.386 in]

18 mm[.709 in]

.12 – 1.4 mm²

4.2 mm[.165 in]

Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	4.2 mm[.165 in]

Housing	Material
Dimension	IC .

Housing Color

Dimensions	D			•		
	1)	m	en	CI	n	JC
				91		J

PCB Thickness (Recommended)

Product Width

Product Length

Compatible Insulation Diameter Range

Wire Size

Row-to-Row Spacing

Usage Conditions

Operating Temperature Range

-40 – 105 °C[-40 – 221 °F]

1.2 – 3.1 mm[.047 – .122 in]

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0



Operation/Application

Circuit Application	Signal
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
CSA Rating	208567
UL Rating	Recognized
Agency/Standard	CSA, UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	255
Packaging Method	Box & Tray, Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0




as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts





Customers Also Bought

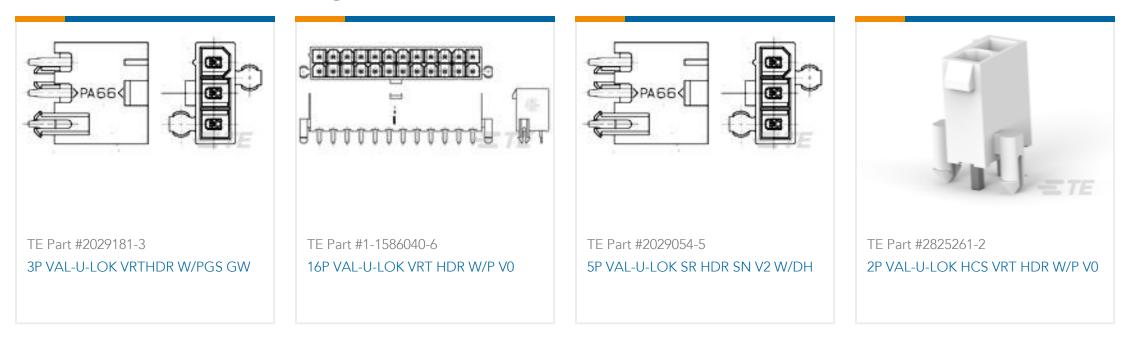

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, 4.2 mm [.165 in] Centerline, Printed Circuit Board, UL 94V-0





Documents

Product Drawings 8P VAL-U-LOK HCS VRT HDR W/P V0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2825261-8_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2825261-8_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2825261-8_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals

UL

English