


## Buchanan

TE Internal #: 282838-8 PCB Terminal Blocks, Header, Wire-to-Board, 7 Position, .394 in [10 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 – 16 AWG Wire Size

### View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

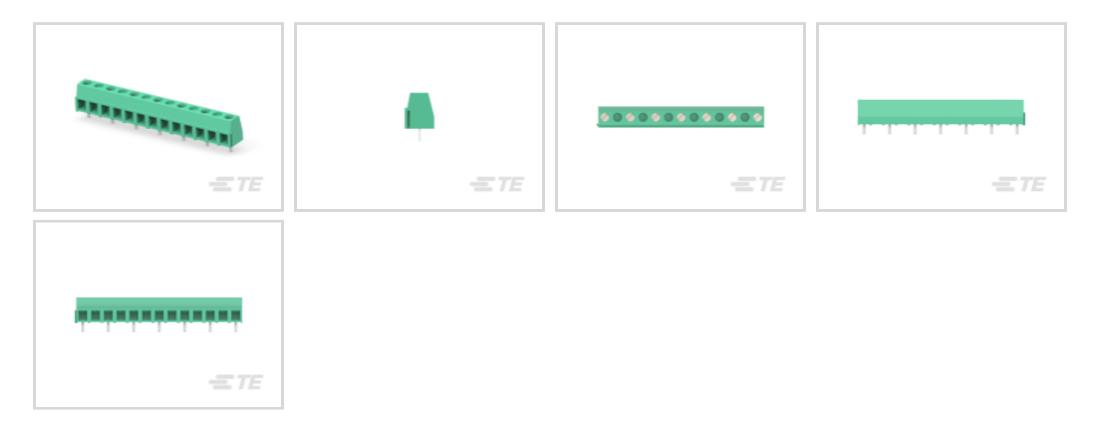

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 7

Centerline (Pitch): 10 mm [.394 in ]

Number of Rows: 1

# Features

connectivity

## Product Type Features

| Wire Protection                   | With                  |
|-----------------------------------|-----------------------|
| Terminal Block Connector Type     | Header                |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features            |                       |
| Stacked Levels                    | Without               |
| Wire Entry Location               | Side                  |
| Number of Positions               | 7                     |
| Number of Rows                    | 1                     |
| Wire Entry Angle                  | 90°                   |
| Electrical Characteristics        |                       |
| Operating Voltage                 | 600 VAC               |
| Body Features                     |                       |
| Primary Product Color             | Green                 |

**C** For support call+1 800 522 6752

PCB Terminal Blocks, Header, Wire-to-Board, 7 Position, .394 in [10 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 – 16 AWG Wire Size



| Product Orientation                         | Vertical              |
|---------------------------------------------|-----------------------|
| Contact Features                            |                       |
| Contact Mating Area Plating Material        | Tin                   |
| Contact Base Material                       | Brass                 |
| Contact Current Rating (Max)                | 13.5 A                |
| Fermination Features                        |                       |
| Termination Post & Tail Length              | 3.5 mm[.138 in]       |
| Termination Method to Printed Circuit Board | Through Hole - Solder |
| Mechanical Attachment                       |                       |
| Screw Plating Material                      | Nickel                |
| Screw Material                              | Brass                 |
| Thread Size                                 | M3                    |
| Connector Mounting Type                     | Board Mount           |
| Housing Features                            |                       |
| Housing Material                            | PA 66                 |
| Centerline (Pitch)                          | 10 mm[.394 in]        |
|                                             |                       |

### Dimensions

|                                                                                              | 00/27/2022 10:3            |
|----------------------------------------------------------------------------------------------|----------------------------|
| EU RoHS Directive 2011/65/EU                                                                 | Compliant with Exemptions  |
| <b>Product Compliance</b><br>For compliance documentation, visit the product page on TE.com> |                            |
| Terminal Blocks & Strips Comment                                                             | 10A Field Wiring           |
| Other                                                                                        |                            |
| Packaging Method                                                                             | Box                        |
| Packaging Quantity                                                                           | 50                         |
| Packaging Features                                                                           |                            |
| Circuit Application                                                                          | Power & Signal             |
| Operation/Application                                                                        |                            |
| Operating Temperature Range                                                                  | -40 – 110 °C[-40 – 230 °F] |
| Usage Conditions                                                                             |                            |
| Wire Size                                                                                    | .05 – 1.3 mm²              |
|                                                                                              |                            |

PCB Terminal Blocks, Header, Wire-to-Board, 7 Position, .394 in [10 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 – 16 AWG Wire Size



| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold                                                                                                                                                                                                                                                                                                                                                                                               |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>SVHC > Threshold:<br>Pb (.8% in Component Part)<br>Article Safe Usage Statements:<br>Do not eat, drink or smoke when using this product. Wash thoroughly after<br>handling. Recycle if possible and dispose of the article by following all applicable<br>governmental regulations relevant to your geographic location. |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free                                                                                                                                                                                                                                                                                                                                          |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                                                                                                                                                                                                                                                                                                                       |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-

reach


# **Compatible Parts**



# **Customers Also Bought**

PCB Terminal Blocks, Header, Wire-to-Board, 7 Position, .394 in [10 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 – 16 AWG Wire Size



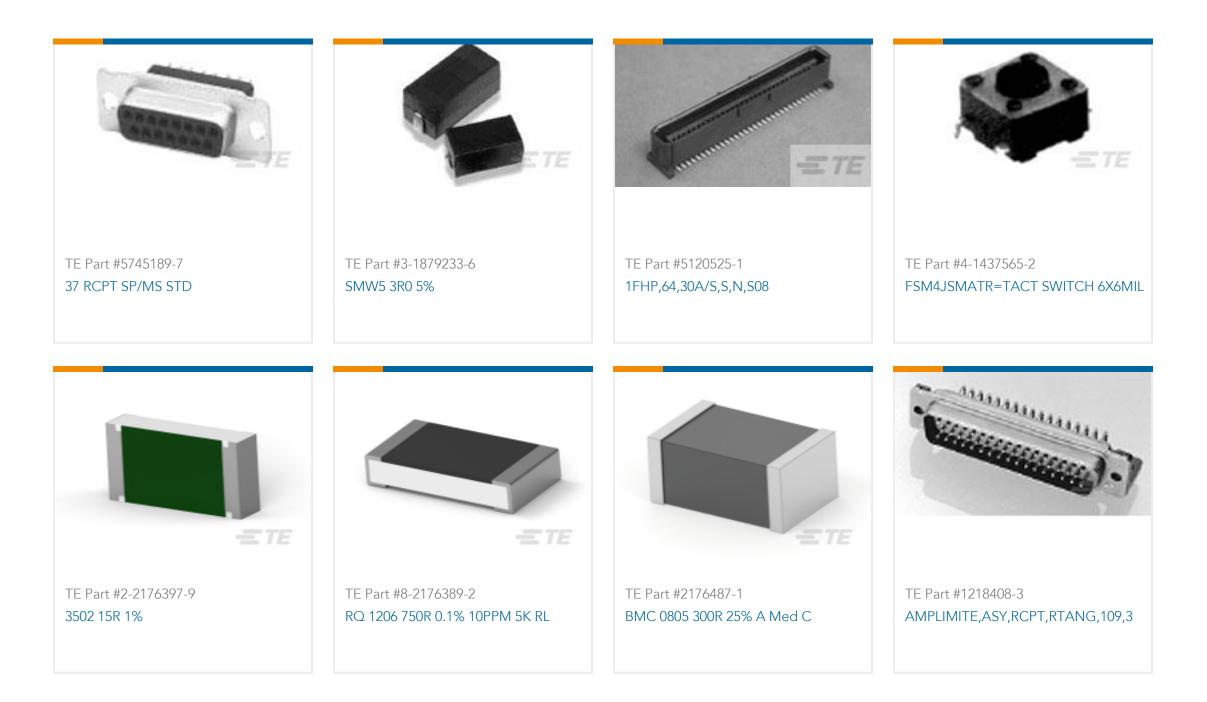

# Documents

Product Drawings TERMI-BLOK PCB MOUNT 90 7P.

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_282838-8\_E.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_282838-8\_E.3d\_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_282838-8_E.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

```
1-1773458-1_EURO_STYLE_TERMINAL_BLOCKS_QRG
```

English

## **Product Specifications**

**Application Specification** 

English

PCB Terminal Blocks, Header, Wire-to-Board, 7 Position, .394 in [10 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 – 16 AWG Wire Size



Agency Approvals UL

English