




Terminals & Splices > Spade Terminals > PIDG Short Spring Spade Tongue Terminals

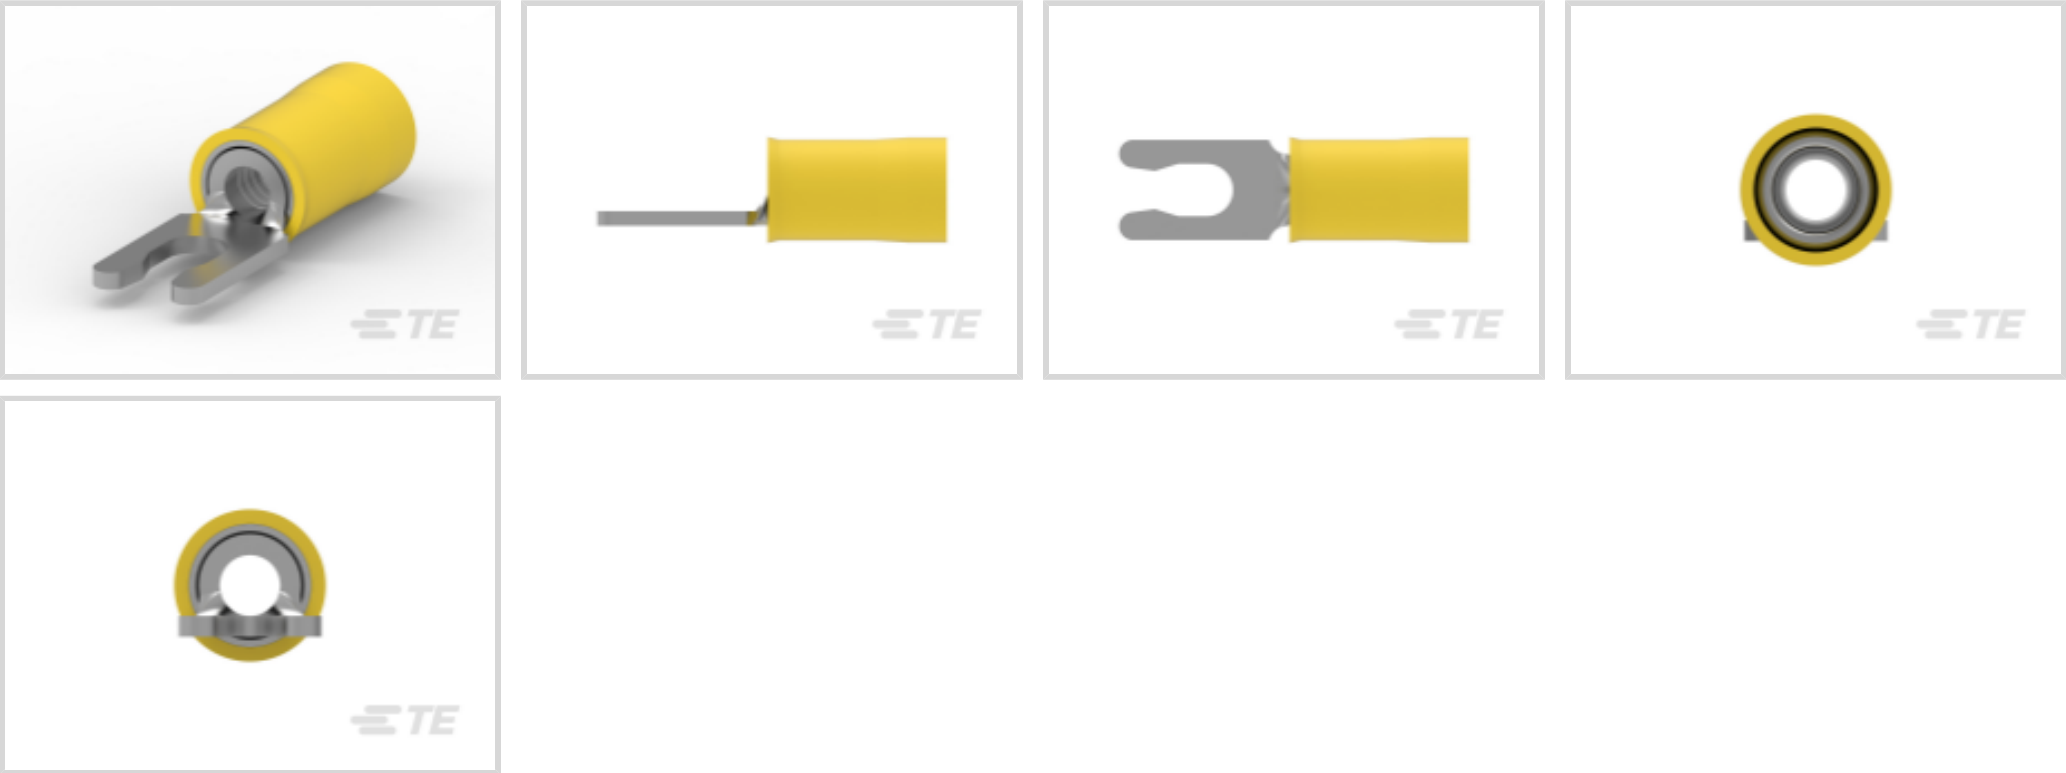

Spade Terminal Type: **Spring Spade Terminal**

Wire Size: **5180 – 13100 CMA**

Stud Size: **#6, M3.5**

[All PIDG Short Spring Spade Tongue Terminals \(38\)](#)

Features

Product Type Features

Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Insulation Support

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Sleeve Color	Yellow
Stripe Color	Yellow

Contact Features

Spade Terminal Type	Spring Spade Terminal
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment



Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	5180 – 13100 CMA
Stud Diameter	3.56 mm[.14 in]
Tongue Thickness	.99 mm[.039 in]
Product Length	24.31 mm[.957 in]
Compatible Insulation Diameter (Max)	6.35 mm[.25 in]
Compatible Insulation Diameter Range	3.81 – 6.35 mm[.15 – .25 in]

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	2500
Packaging Method	Tape Mounted

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 59824-1 TETRA-CRIMP PIDG PG FASTON 22-10 ASSY	TE Part # 59239-4 HHHT PIDG PG 12-10 ASSY	TE Part # 58423-1 DIE, RBY IS9252	TE Part # 58433-3 PRO CR ASSY, RBY IS9252
TE Part # 1SET191001R0000 CRIMP-HT	TE Part # 1SET191002R0000 TET CRIMP-HT	TE Part # 169404 CERTI-LOK DIE	

Customers Also Bought


TE Part #HD34-24-19PE REC, 19P, AL, E, 12/16, P	TE Part #6609032-1 1VR1=F7194 S0	TE Part #5-1625971-3 Power Resistors: Aluminum Housed, HSA	TE Part #32837-1 TERMINAL,PIDG R 22-16 10





TE Part #2-34854-1

TERMINAL,PG R 12-10 10

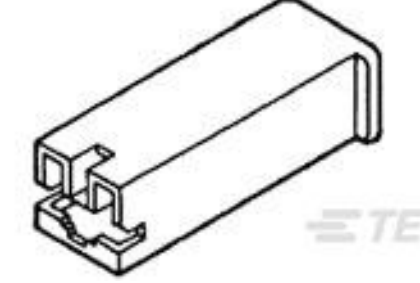

TE Part #172076-1

POSITIVE LOCK 250 HOUSING RECEPTACLE



TE Part #NB13594001

RNF-100-3/8-CL-FSP

Documents

Product Drawings

TERMINAL,PIDG SPR SPD 12-10 6

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_52941-1_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_52941-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_52941-1_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_52941-1_05042018933_dmtec

English

MD_52941-1_05042018933_dmtec

English

Instruction Sheets

AMP* PIDG* (VINYL) & PLASTI-GRIP* SHORT SPRING SPADE TERMINALS FOR BAR

English

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

52941-1

Spring Spade Terminal, 12 – 10 AWG, M3.5 / #6 Stud Size, 3.56 mm [.14 in] Stud Diameter, Closed Barrel, Straight, Tin, Partially Insulated



English