




Terminals & Splices > Quick Disconnects

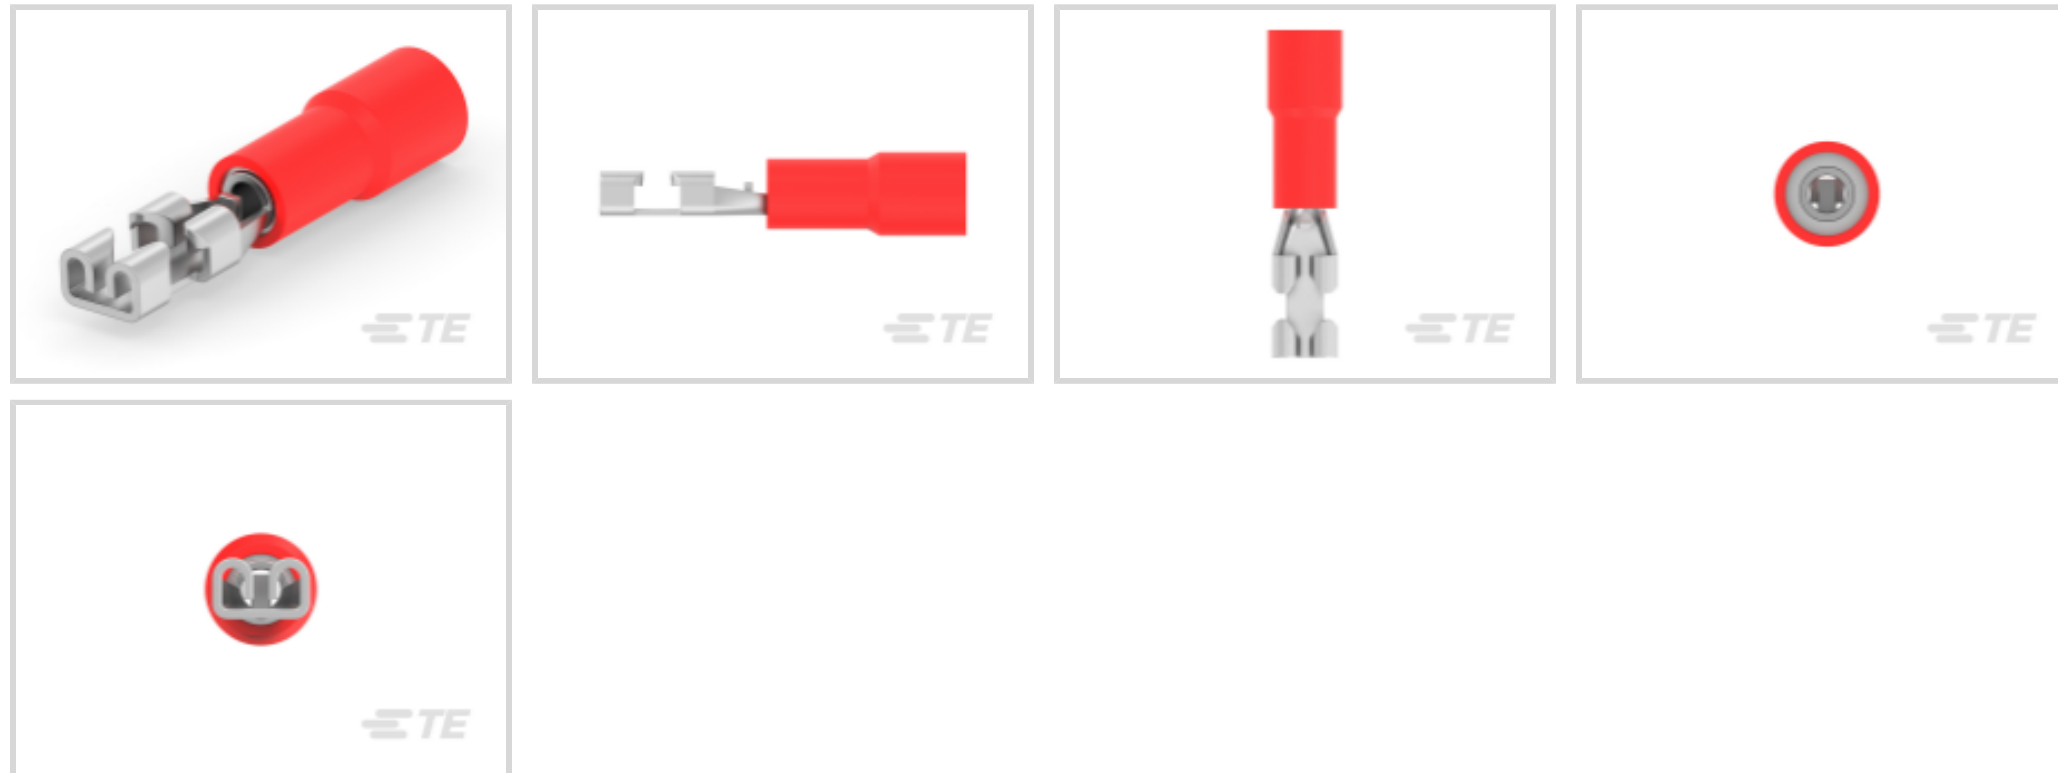

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **509 – 1900 CMA**

Mating Tab Width: **2.79 mm [.11 in]**

## Features

### Product Type Features

Terminal Features	Wire Stop
Insertion Force	Low

### Electrical Characteristics

Voltage Rating	300 V
----------------	-------

### Body Features

Insulation Material	Nylon
---------------------	-------

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.79 mm [.11 in]
Mating Tab Thickness	.51 mm [.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	Compression
Barrel Type	Closed



### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

### Dimensions

Terminal Material Thickness	.41 mm[.016 in]
Product Length	20.36 mm[.8 in]
Compatible Insulation Diameter Range	3.43 mm[.135 in]
Wire Size	509 – 1900 CMA

### Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

### Industry Standards

Agency/Standard	CSA, RU (UL Component Program)
-----------------	--------------------------------

### Packaging Features

Packaging Quantity	5000
Packaging Method	Reel

### Other

Barrel Color	Red
--------------	-----

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts

TE Part # 8-640923-1  
RECEPT,PIDG FASTON 22-18 110

TE Part # 567200-3  
APPL,HDM,TAPE 9CB W/O DIES G

TE Part # 567200-2  
APPL,HDM,TAPE 9 CB W/O DIES K

TE Part # 687658-1  
APPL,HDM,TAPE 9 CB W/O DIES T

### Also in the Series | FASTON 110

Crimp Terminal Housings(13)

Insertion & Extraction Tools(1)

PCB Terminals(21)

Quick Disconnects(171)


### Customers Also Bought

TE Part #2-31903-2  
TERMINAL,PIDG R 16-14 10

TE Part #175778-4  
CT. CRIMP REC HSG 4P

TE Part #6609044-2  
Single Phase Filters, Corcom W Series

TE Part #1586105-3  
3P RCPT VAL-U-LOK SR V2

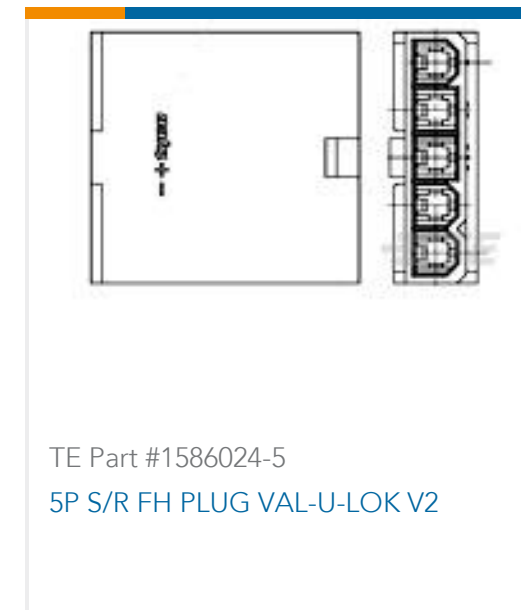

## Documents

### Product Drawings

RECEPT,PIDG, FASTON, .110 SERIES, 22-18

English

### CAD Files

3D PDF

English

Customer View Model

[ENG\\_CVM\\_640923-2\\_H1.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_640923-2\\_H1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_640923-2\\_H1.3d\\_stp.zip](#)

English

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_640923-2\\_G.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_640923-2\\_G.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_640923-2\\_G.3d\\_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### [PIDG\\_FASTON](#)

English

#### [Ultra-Fast and Ultra Fast Plus](#)

English

#### [PIDG Terminals and Splices Quick Reference Guide](#)

English

#### [Standard Terminals & Splices](#)

English

### Product Specifications

#### [Application Specification](#)

English

### Product Environmental Compliance

#### [MD\\_640923-2\\_0707201401\\_dmtec](#)

English

#### [MD\\_640923-2\\_0707201401\\_dmtec](#)

English

### Agency Approvals

#### [UL Report](#)

English