CONMCX002-SMD-T <

TE Internal #: CONMCX002-SMD-T MCX RF Interface, Jack, 50 Ω, Snap-On, 6 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder

View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: MCX RF Connector Style: Jack Impedance: 50 Ω

RF Connector Coupling Mechanism: Snap-On

Operating Frequency: 6 GHz

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	MCX
RF Connector Style	Jack

Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Right Angle
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Cable Connector Orientation	Right Angle
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold
Contact Features	
RF Connector Center Contact Plating Material	Gold

CONMCX002-SMD-T

MCX RF Interface, Jack, 50 Ω, Snap-On, 6 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder



RF Connector Center Contact Material	Beryllium Copper
Termination Features	
Termination Method to Printed Circuit Board	Surface Mount
Termination Method to Wire & Cable	Solder
Mechanical Attachment	
RF Connector Coupling Mechanism	Snap-On
Connector Mounting Type	Board Mount
RF Contact Captivation Method	Mechanical
Detent	Without
Usage Conditions	
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Operation/Application	
Operating Frequency	6 GHz
Circuit Application	Signal
Packaging Features	
Packaging Quantity	900
Packaging Method	Tape & Reel



Other

Dielectric Material	PTFE			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant with Exemptions			
EU ELV Directive 2000/53/EC	Not Yet Reviewed			
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed			
Halogen Content	Not Yet Reviewed for halogen content			
Solder Process Capability	Not reviewed for solder process capability			
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and re	apresents our current actual knowledge			


CONMCX002-SMD-T

MCX RF Interface, Jack, 50 Ω, Snap-On, 6 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F], Solder



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Customers Also Bought

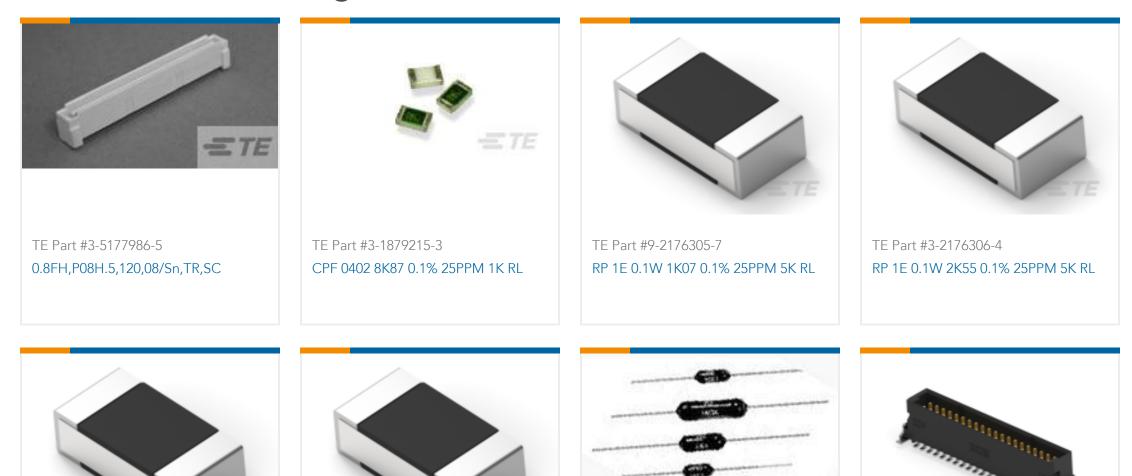



Documents

Datasheets & Catalog Pages MCX FEMALE RIGHT ANGLE PCN SURFACE MOUNT

English