CONSMA011-G 🗸 ACTIVE

TE Internal #: CONSMA011-G SMA RF Interface, Jack, 50 Ω, RG 188 / RG 174 / RG 316, Threaded, 18 GHz Operating Frequency, 1 Position, Wire & Cable, Cable Mount (Free-Hanging)

View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: SMA

RF Connector Style: Jack

Impedance: 50Ω

Compatible With RF Cable Type: RG 174, RG 188, RG 316

RF Connector Coupling Mechanism: Threaded

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	SMA
RF Connector Style	Jack

Compatible With RF Cable Type	RG 174, RG 188, RG 316
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold
Contact Features	
Ferrule Plating Material	Gold

C For support call+1 800 522 6752

SMA RF Interface, Jack, 50 Ω, RG 188 / RG 174 / RG 316, Threaded, 18 GHz Operating Frequency, 1 Position, Wire & Cable, Cable Mount (Free-Hanging)



Ferrule Material	Brass
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical
Detent	Without
Usage Conditions	
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Operation/Application	
Operating Frequency	18 GHz
Circuit Application	Signal
Packaging Features	
	100

Packaging Quantity

Packaging N	Nethod
-------------	--------

Tray

100

Other

Dielectric Material

PTFE

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

SMA RF Interface, Jack, 50 Ω , RG 188 / RG 174 / RG 316, Threaded, 18 GHz Operating Frequency, 1 Position, Wire & Cable, Cable Mount (Free-Hanging)




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



SMA RF Interface, Jack, 50 Ω, RG 188 / RG 174 / RG 316, Threaded, 18 GHz Operating Frequency, 1 Position, Wire & Cable, Cable Mount (Free-Hanging)



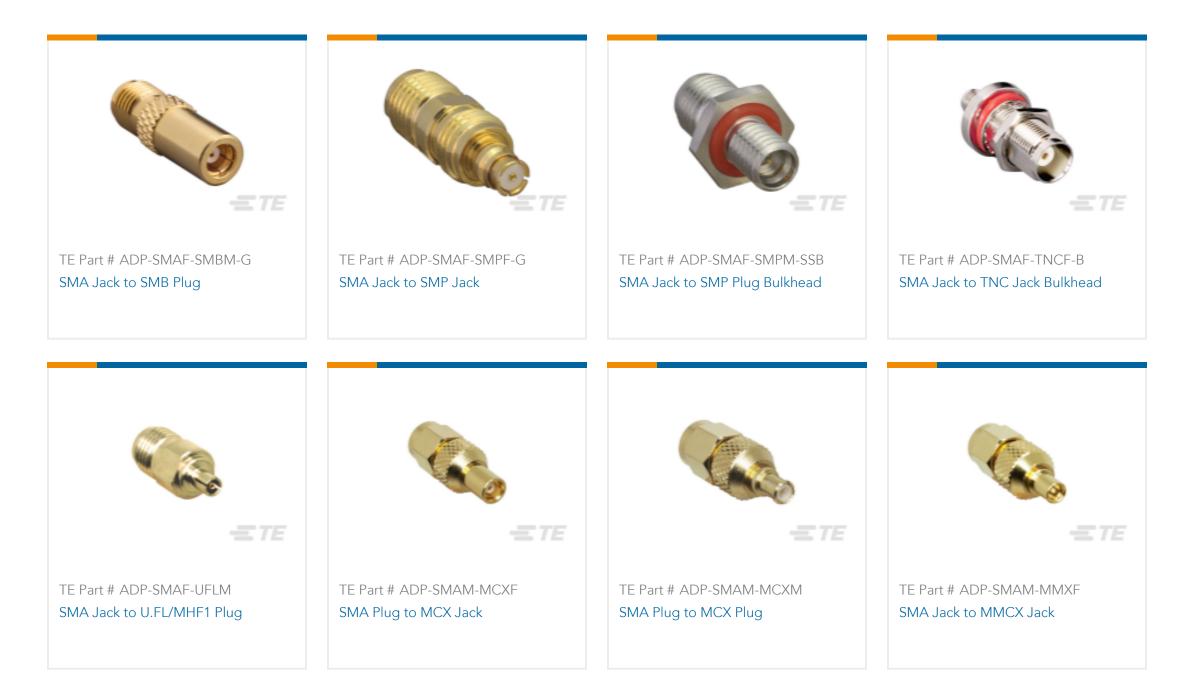

Customers Also Bought



BRSHL, 8P, BLK, R	С, КА	, INVVO.3/	10/13	
-------------------	-------	------------	-------	--

AMPSEAL 16 Connectors Backshell

M12A4-MS-FS-PVC-1.0M

222A132-4/42-0





Documents

SMA RF Interface, Jack, 50 Ω , RG 188 / RG 174 / RG 316, Threaded, 18 GHz Operating Frequency, 1 Position, Wire & Cable, Cable Mount (Free-Hanging)



Product Drawings SMA Jack 50 Ohm Cable Crimp

English

Datasheets & Catalog Pages SMA FEMALE CABLE END CRIMP FOR RG-174 CABLE

English