

DT04-12PA-CL03 ✓ ACTIVE

DEUTSCH | DEUTSCH DT

TE Internal #: DT04-12PA-CL03

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors



Connector System: **Wire-to-Wire**

Number of Positions: **12**

Connector & Housing Type: **Housing for Male Terminals**

Centerline (Pitch): **9.12 mm [.359 in]**

Sealable: **Yes**

[All DEUTSCH DT Receptacle Connectors \(240\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Blank Cavity Position	0
Connector Modification	Welded Flange
Connector Seal Code	E Seal
Number of Positions	12
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features



Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	A

Contact Features

Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	PA GF
Centerline (Pitch)	9.12 mm[.359 in]

Dimensions

Connector Height	35.56 mm[1.4 in]
Product Width	55.12 mm[2.17 in]
Product Length	45.92 mm[1.808 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94



Packaging Features

Packaging Quantity	200
Packaging Method	Box

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part)</p> <p>Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # CAT-D487-B128
DEUTSCH DT Backshells



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs

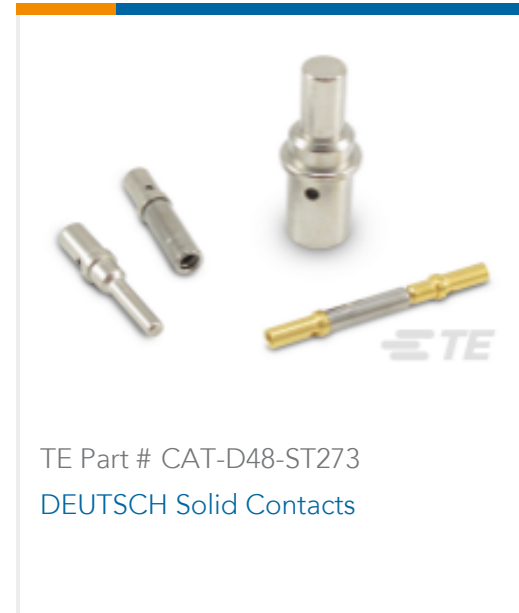

TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # W12P
WEDGE LOCK, 12P, REC, GRN, DT



TE Part # CAT-J67-DSCC16
DEUTSCH Size 16 Crimp Contacts



TE Part # 776364-1
SEALING PLUG, SZ 20 CAVITY



TE Part # CAT-D487-P729
Dust Caps — DEUTSCH DT



TE Part # DT06-12SA-CE02
PLG, 12P, BLK, E, A



TE Part # DT06-12SA-CE01
PLG, 12P, GRY, E, CAP, A



TE Part # DT06-12SA-CE06
PLG, 12P, GRY, E, SEAL RET, ENH KEY, A



TE Part # DT06-12SA-CE05
PLG, 12P, GRY, E, SEAL RET, ENH KEY, CAP, A



TE Part # DT06-12SA-CE04
PLG, 12P, GRY, E, XCAP, A



TE Part # DT06-12SA-CE13
PLG, 12P, GRY, E, SEAL RET, ENH KEY, XCAP, A



TE Part # DT12P-BT
BOOT, 12P, REC, ST, GRY



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE



TE Part # DT12-L012-GKT
GASKET DT 12 WY FLD RC



TE Part # DT12P-BT-BK
BOOT, 12P, REC, ST, BLK



TE Part # DT06-12SA-C017
PLG, 12P, GRY, BLOCKED, A



TE Part # DT06-12SA-CE12
PLG, 12P, BLK, E, SEAL RET, ENH KEY, XCAP, A




TE Part # DT06-12SA-C015
PLG, 12P, GRY, E, A


Also in the Series | **DEUTSCH DT**



Automotive Connector Caps & Covers (19)

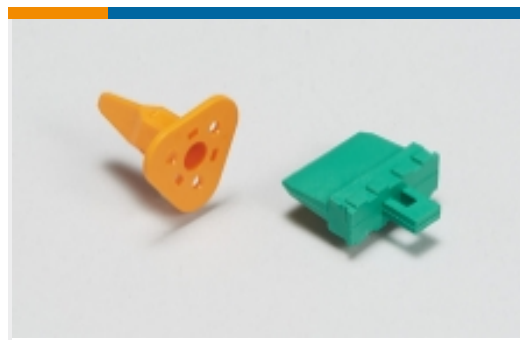

Automotive Connector Locks & Position Assurance(74)

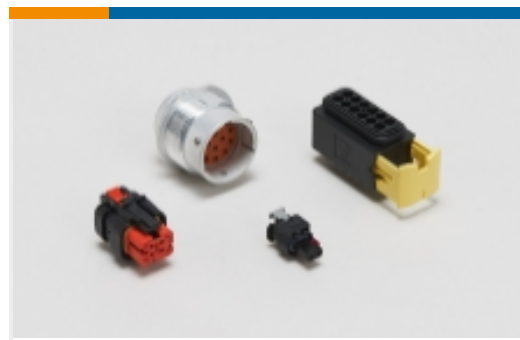

Automotive Housings(620)



Connector Backshells(58)



Connector Seals & Cavity Plugs(6)




Connector Strain Relief(28)



Insertion & Extraction Tools(3)



Other Automotive Connector Accessories(27)

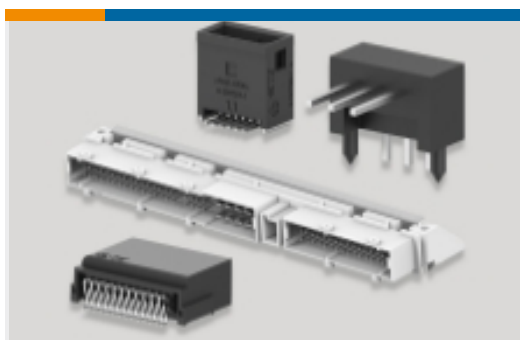

PCB Headers & Receptacles(103)

Customers Also Bought



TE Part #HDP26-24-16SN
DEUTSCH HDP20 Housings



TE Part #DRC16-70SAE-P013
PLG, 70P, BLK, E, SEAL BOND, A



TE Part #640251-3
03P SL156 HSG W/O RAMP NATL



TE Part #3-1625971-6
HSA25 330R 5%



TE Part #DT04-12PB-CL03
REC, 12P, BLK, E, FLANGE, B




TE Part #DT06-12SB-C015
PLG, 12P, BLK, E, B



TE Part #1-968875-3
AMP MCP 2.8, CONTACT SWS (LP)



TE Part #3-1618391-7
LEV100A6ANG=RELAY,SPST-NO,
48VDC VMT 15

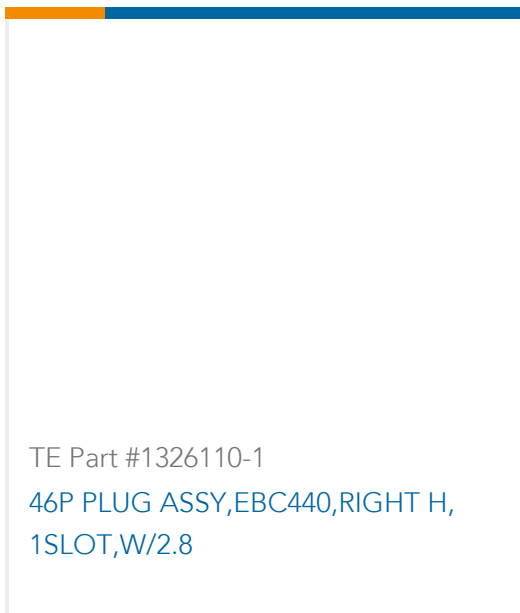

Documents

Product Drawings

[REC, 12P, GRY, E, FLANGE, A](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_DT04-12PA-CL03_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_DT04-12PA-CL03_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_DT04-12PA-CL03_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ICT Terminals and Connectors Catalogue](#)

English

[CONNECTOR SELECTOR](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English