# T4171310005-001 <

### M12 Connector

TE Internal #: T4171310005-001 Standard Circular Connectors, Wire-to-Panel, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector

### View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors > M12 Panel Mount Wire



Connector System: Wire-to-Panel Number of Positions: 5

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

### All M12 Panel Mount Wire (66)



## Features

## **Product Type Features**

Prewired	Yes
Product Type	Connector Assembly
Accessory Color	Black
Assembly Type	Electrical Connector
Connector System	Wire-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal
Configuration Features	
Keying & Polarized Position Locations	A
Factory Installed Backshell	No
Keying	A

**C** For support call+1 800 522 6752

Standard Circular Connectors, Wire-to-Panel, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



Number of Positions	5
Number of Power Positions	0
Number of Signal Positions	5
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	60 VAC
Body Features	
Peripheral Seal Material	Silicone
O-Ring Material	Silicone
Environmental Protection Type	Sealed
Shell Plating Material	Nickel
Shell Base Material	Brass
Circular Connector Insulation Material Type	Polyamide
Contact Features	
Contact Current Rating (Max)	4 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket

## Mechanical Attachment

Polarization Code	A
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	18
Dimensions	
Wire Size	.34 – .5 mm²
Usage Conditions	
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Shielded	No
Industry Standards	

Standard Circular Connectors, Wire-to-Panel, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	1
Other	
Field Serviceable	No
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (1.9% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Not Low Halogen - contains Br or Cl > 900

#### ppm.

### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Standard Circular Connectors, Wire-to-Panel, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector






# Also in the Series | M12 Connector

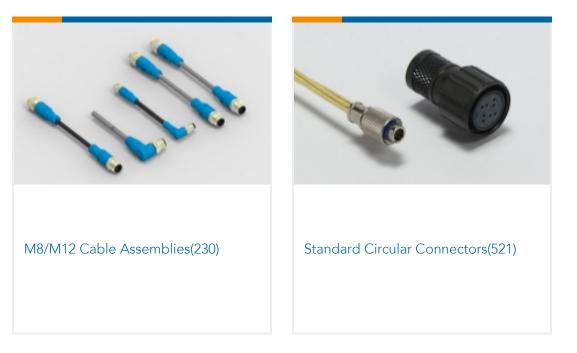

# Customers Also Bought

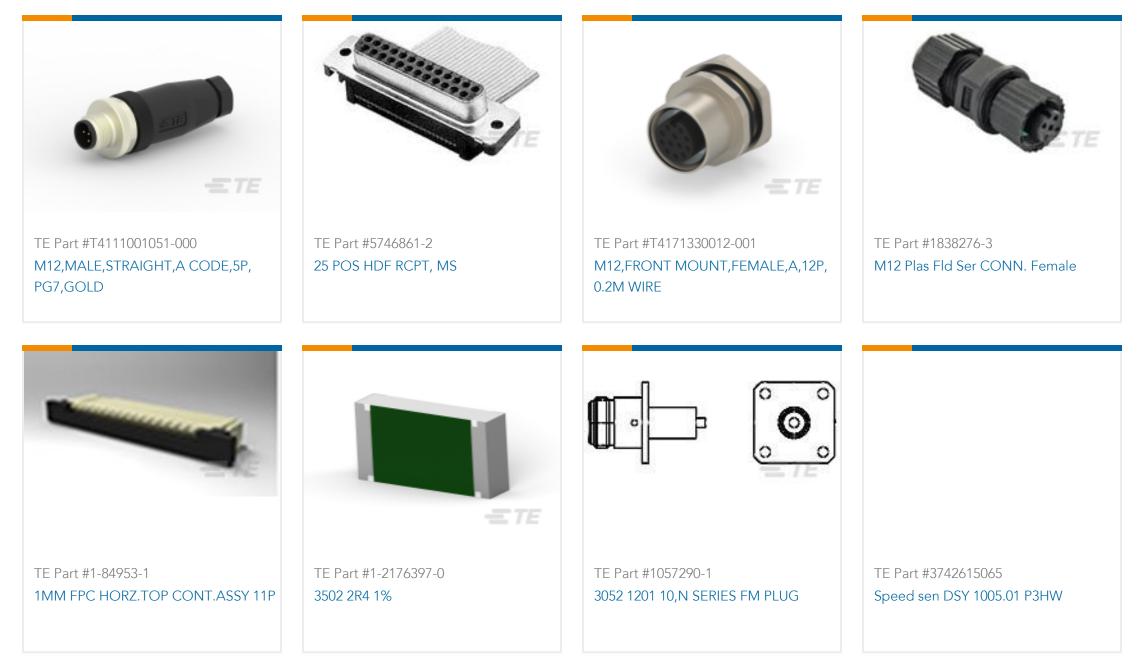



Standard Circular Connectors, Wire-to-Panel, 5 Position, Sealable, Wire & Cable, Signal, Reverse Gender, Nickel, Brass, M12 Connector



## Documents

Product Drawings M12,FRONT MOUNTING,FEMALE,A,5P,0.2M WIRE

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_T4171310005-001\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4171310005-001\_B.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_CVM\_T4171310005-001\_B.2d\_dxf.zip

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

### Product Specifications

English

Agency Approvals

UL

English